

## ■ Features

- Power Rating: 160W
- Input Voltage: 277-480Vac
- Constant current and constant voltage hybrid design
- Adjustable Output current (270mA-6670mA)
- Efficiency to 93%
- 0-10V dimming/PWM/Timer Dimming, Dim-to-off
- Programmable with Near Field Communication technology without power to the driver
- 12V 200mA Aux power
- UL Class "P", and UL Class 2 outputs/Type HL
- OVP, SCP, OTP, & Over Current Protection
- Tc=90°C
- IP67
- 5-year warranty
- Surge Protection: Diff: 6kV, Common: 10kV



\*Product images are for illustrative purposes only and may vary from actual design.

## ■ Application

- Indoor and Outdoor applications

## ■ Model List\*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Programmable Output Current Region	Efficiency 277V	Certification
L2HCP160S667ST-XYZ	277-480Vac	160W	24-36V	2.76-6.67A	92%	UL/cUL
L2HCP160S444ST-XYZ	277-480Vac	160W	36-54V	1.78-4.44A	92%	UL/cUL
L2HCP160S333ST-XYZ	277-480Vac	160W	48-80V	1.33-3.33A	92%	UL/cUL
L2HCP160S200ST-XYZ	277-480Vac	160W	80-140V	0.8-2A	92%	UL/cUL
L2HCP160S114ST-XYZ	277-480Vac	160W	140-233V	0.46-1.14A	93%	UL/cUL
L2HCP160S069ST-XYZ	277-480Vac	160W	233-375V	0.27-0.69A	93%	UL/cUL

Ordering options	
XY= Programmable	Z=Dimming
FC=Near Field Communication	D=DALI Dimming
	B=BLE Dimming

## ■ Technical Data

Input voltage range	277-480Vac
Frequency	47-63Hz
Power factor	0.95
Output voltage	24-375V

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

January 6, 2020

■ **Technical Data(cont.)**

Output power	160W
Max input current	0.5A @347Vac
Efficiency	92-93%
Line Regulation	±0.3%
Load Regulation	±1%
Inrush Current	65A @230Vac cold start +25°C
Dimming	0~10V, Dim-to-off option
THD	< 20%
Current Programmable	Yes
Output Current Adjustable Range	270-6670mA
Over Current Protection	95-108% Protection type: Constant current limiting, recovers automatically after fault condition is removed
Short Current Protection	Hiccup mode, recovers automatically after fault condition is removed
Over Voltage Protection	1.3Vo, Protection type: Hiccup mode, recovers automatically after fault condition is removed
Over Temp. Protection	Hiccup mode, recovers automatically after fault condition is removed
Operating Temperature	-35°C ~+60°C
Max T-case Temp.	90°C
Operating Humidity	10~100% RH non-condensing
Storage Temp., Humidity	-40 ~+85°C, 5 ~ 100% RH
Vibration	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
Dimensions	232x84.1x39mm
Packing	1.6kg
Weight	12pcs/carton

■ **Safety Compliance**

Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 No.107.1, EN61347-1, EN61347-2-13
Withstand Voltage	I/P – O/P: 3.75kVAC
Isolation Resistance	I/P – O/P: 100M Ohms / 500VDC /25°C / 70% RH
EMC Emission	Compliance to EN55015, EN61000-3-2 Class C (≥60% load); EN61000-3-3
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024

**Disclaimer:**

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)



31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

January 6, 2020

2 / 5

#### ■ Dimming

##### 0-10V Analog Dimming

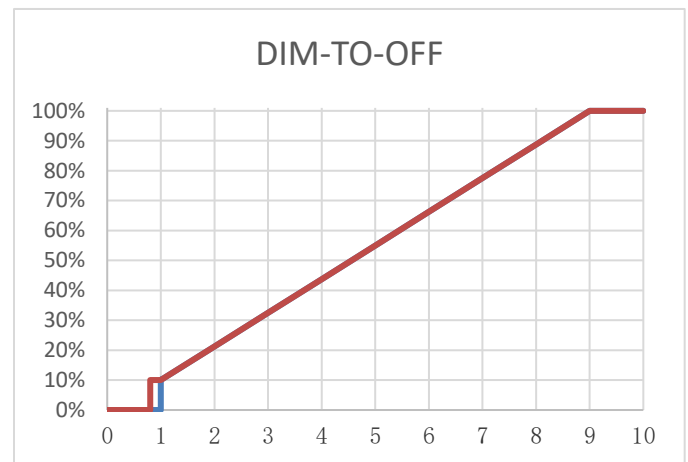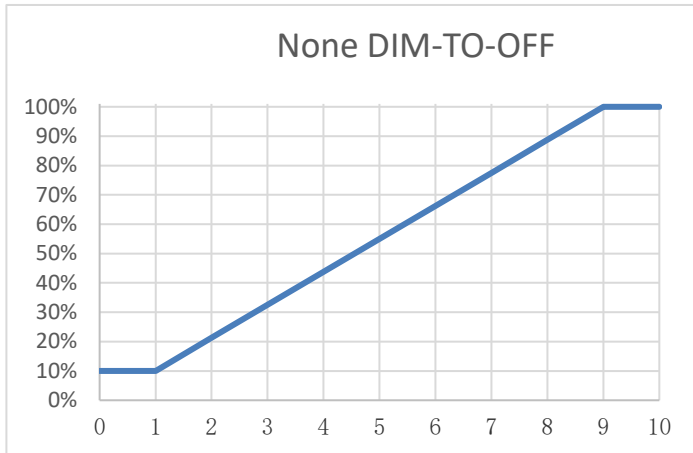

#### NOTE:


1.  $I_o$  is actual output current and  $I_r$  is rated current without dimming control.
2. For the driver to operate properly, the load voltage must be in the working voltage range.
3. We have DIM-TO-OFF option, which can be programmed by the programmer.
4. Maximum input voltage for the dimming wire is 12V.
5. AUX wire is only for source, can't connect to other voltage source.

GND	Grey
Dimming wire 0-10V & PWM	Purple
12V AUX	Yellow
Input Dimming Voltage	0-10V
DIM+ Source Current	0.5mA
12V AUX Source Current	200mA
PWM Frequency Range	0.5-3KHZ
PWM high level	10V

#### ■ TIMER Dimming

##### NOTE:

1. The dimming time can be programmed by the programmer.
2. The time of  $t_1$  and  $t_2$  can be set by the programmer.(0.5h step)
3. The value of  $I_1$  and  $I_2$  can be set by the programmer.
4. Changing the current from  $I_1$  to  $I_2$  may take a few min.

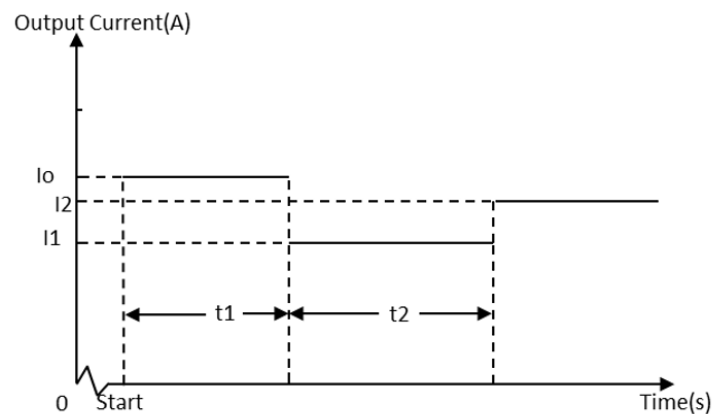

## ■ Near Field Communication Controller




### NOTE:


1. The Near Field Communication controller can program the output current, voltage and timer delays.
2. The Near Field Communication programming is a non-contact process, therefore much safer compared to traditional programming methods.
3. Power devices can be programmed without AC power applied to the driver.

## ■ Mechanical Design

AC Input (UL STW 3x18AWG)

DC Output (UL SJTW 2x14AWG)

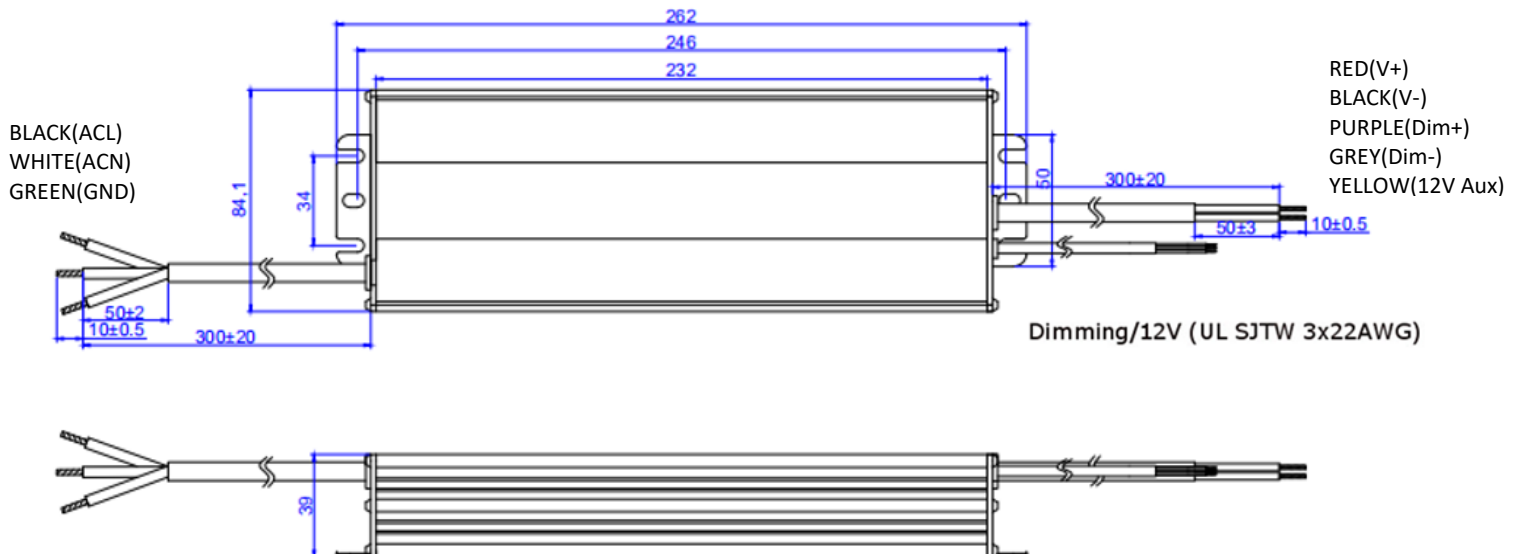

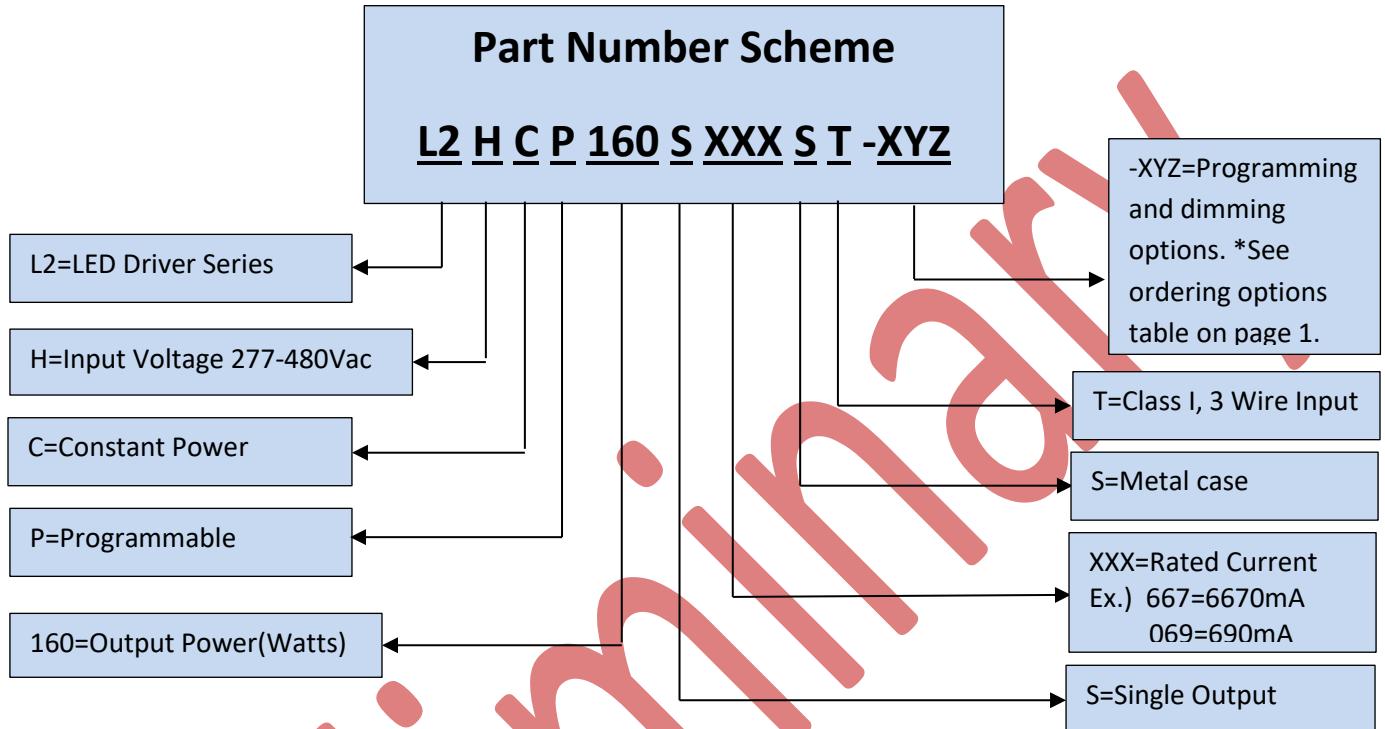

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**