


## ■ Features

- Power Rating: 600W
- Input Voltage: 347-480Vac
- Constant current and constant voltage hybrid design
- Adjustable Output current (1200mA-11100mA)
- Efficiency to 94%
- 0-10V, PWM, Timer
- Dim-to-off option
- Programmable with Near Field Communication technology without power to the driver
- 12V 200mA Aux power
- Programmable timer
- UL Class "P", Type HL, Type TL
- OVP, SCP, OTP, & Over Current Protection
- IP67
- 5-year warranty
- Surge Protection: Diff: 6kV, Common: 10kV



\*Near Field Communication controller



\*Product images are for illustrative purposes only and may vary from actual design.

## ■ Application

- Indoor and outdoor applications

## ■ Model List\*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Programmable Output Current Region	Efficiency 277V	Certification
L2TCP600S1110ST-XYZ	347-480Vac	600W	32-54V	6.67-11.1A	93%	UL/cUL
L2TCP600S0556ST-XYZ	347-480Vac	600W	64-108V	3.33-5.56A	93%	UL/cUL
L2TCP600S0333ST-XYZ	347-480Vac	600W	108-180V	2-3.33A	94%	UL/cUL
L2TCP600S0200ST-XYZ	347-480Vac	60W	180-300V	1.2-2A	94%	UL/cUL

Ordering options	
XY= Programmable	Z=Dimming
FC=Near Field Communication	D=DALI Dimming
	B=BLE Dimming

## ■ Technical Data

Input voltage range	347-480Vac
Frequency	47-63Hz
Power factor	> 0.95 @277Vac & 80~100% Full load
Output voltage	32-300V
Output power	600W

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

June 26, 2019

**■ Technical Data(cont.)**

Max input current	1.86@347Vac
Max input Power	600W
Efficiency	93-94%
Line Regulation	$\pm 0.3\%$
Load Regulation	$\pm 1\%$
Inrush Current	65A @230Vac cold start +25°C
Dimming	0~10V, PWM, Timer, Dim-to-off
THD	< 20%
Current Programmable	Yes
Output Current Adjustable Range	1200-11100mA
Over Current Protection	Protection type: Constant current limiting, recovers automatically after fault condition is removed
Short Current Protection	Hiccup mode, recovers automatically after fault condition is removed
Over Voltage Protection	1.3Vo, Protection type: Hiccup mode, recovers automatically after fault condition is removed
Over Temp. Protection	Hiccup mode, recovers automatically after fault condition is removed
Operating Temperature	-35~+60°C
Max T-case Temp.	92°C
Operating Humidity	10 ~ 100% RH non-condensing
Storage Temp., Humidity	-40 ~+85°C, 5 ~ 100% RH
Vibration	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
Packing	1.6kg/unit; 20pcs/carton
Net weight	1.6kg/3.5lbs

**■ Safety Compliance**

Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 No.107.1, EN61347-1, EN61347-2-13
Withstand Voltage	I/P – O/P: 3.75kVAC
Isolation Resistance	I/P – O/P: 100M Ohms / 500VDC /25°C / 70% RH
EMC Emission	Compliance to EN55015, EN61000-3-2 Class C ( $\geq 60\%$ load); EN61000-3-3
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024

**Disclaimer:**

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

June 26, 2019

2 / 5

## ■ Near Field Communication Controller





### NOTE:

1. The Near Field Communication controller can program the output current, voltage and timer delays.
2. The Near Field Communication programming is a non-contact process, therefore much safer compared to traditional programming methods.
3. Power devices can be programmed without AC power applied to the driver.

## ■ Dimming

### 0-10V Analog Dimming & PWM Dimming

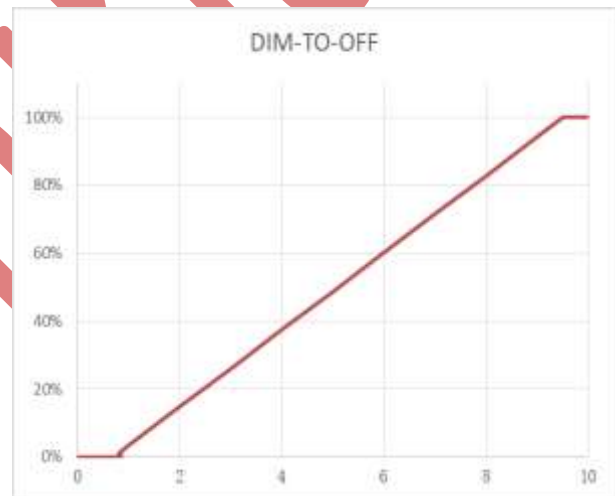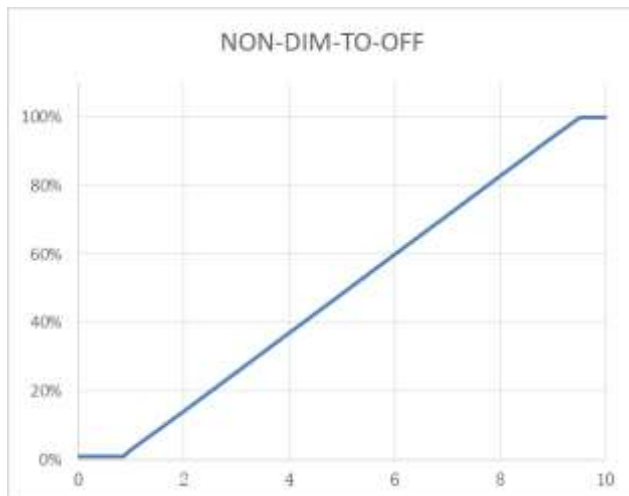

GND	Grey
Dimming wire 0-10V&PWM	Purple
12V AUX	Yellow
Input Dimming Voltage	0-10V
DIM+ Source Current	0-1mA
12V AUX Source Current	200mA
PWM Frequency Range	0.5-3KHZ
PWM high level	10V


### NOTE:

1.  $I_o$  is actual output current and  $I_r$  is rated current without dimming control.
2. For the driver to operate properly, the load voltage must be in the working voltage range.
3. We have DIM-TO-OFF option, which can be programmed by the programmer.
4. Maximum input voltage for the dimming wire is 12V.
5. AUX wire is only for source, can't connect to other voltage source.


## ■ TIMER Dimming

### NOTE:

1. The dimming time can be programmed by the programmer.
2. The time of  $t_1$  and  $t_2$  can be set by the programmer.(0.5h step)
3. The value of  $I_1$  and  $I_2$  can be set by the programmer.
4. Changing the current from  $I_1$  to  $I_2$  may take a few min.

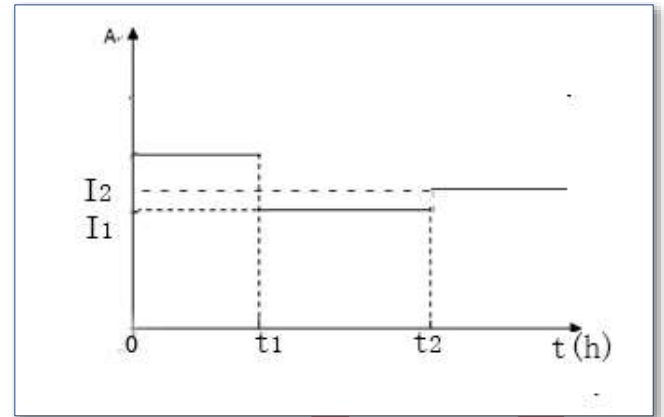


## ■ Mechanical Design

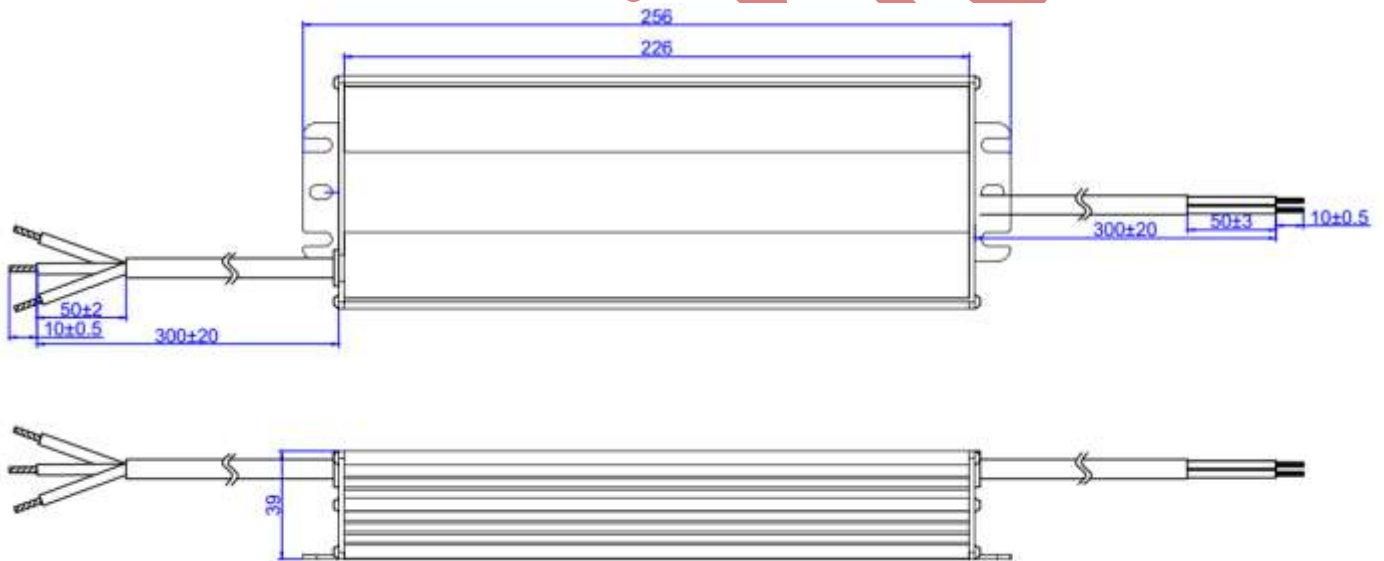

## Part Number Scheme

**L2 T C P 600 S XXXX S T**

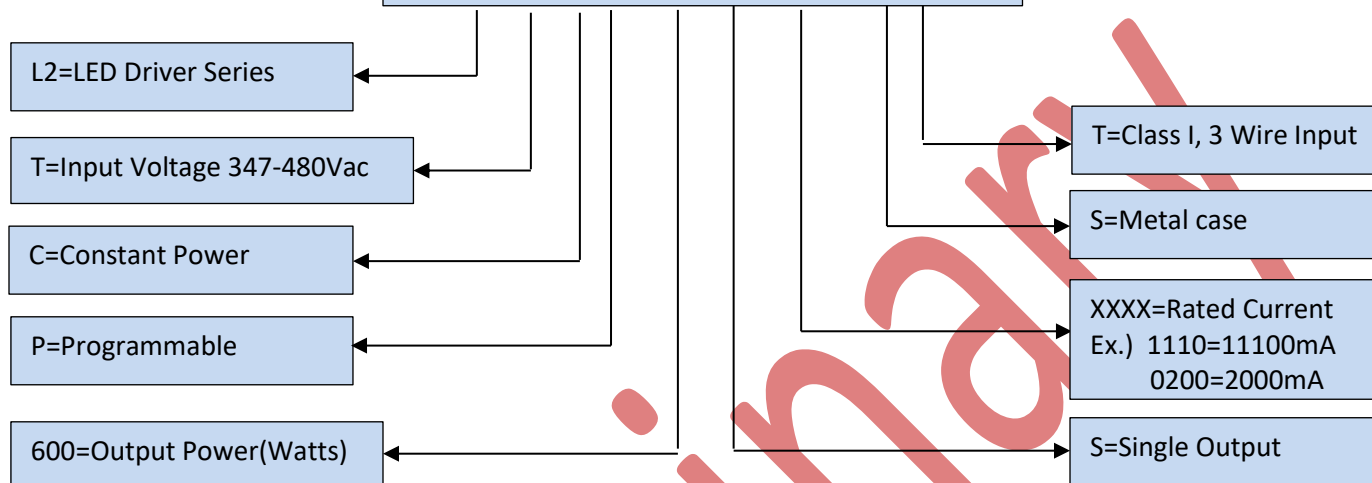

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**