RoHS 2



60W, 100-277Vac Input, Constant Current LED Driver

● F€ □ ♥ ↑ ▼ RoHS Class 2

Features

• Power Rating: 60W

Input Voltage: 100-277Vac

- Constant current design
- Fixed output current(300mA-1500mA)
- Efficiency to 87%
- 0-10V/PWM/RX Dimming
- Dimming range 0-100%
- Dim-to-off
- OCP, SCP
- UL Class P / Class 2
- IP20
- 5-year warranty
- Surge Protection level L-N: 1kv

Application

- Indoor or outdoor lights
- Dry or Damp locations

■ Model List*(See part number scheme for model number details)

= 100 del 1100 (See pare namber serieme for model namber details)									
Model Number	Input Voltage Range	•		Output Output Voltage Current Min.		Efficiency	Certification		
LFWCD060S030SS-PM	100-277Vac	60W	25-40V	300mA	300mA	87%	UL		
LFWCD060S040SS-PM	100-277Vac	60W	25-40V	400mA	400mA	87%	UL		
LFWCD060S050SS-PM	100-277Vac	60W	25-40V	500mA	500mA	87%	UL		
LFWCD060S060SS-PM	100-277Vac	60W	25-40V	600mA	600mA	87%	UL		
LFWCD060S070SS-PM	100-277Vac	60W	25-40V	700mA	700mA	87%	UL		
LFWCD060S080SS-PM	100-277Vac	60W	25-40V	800mA	800mA	87%	UL		
LFWCD060S090SS-PM	100-277Vac	60W	25-40V	900mA	900mA	87%	UL		
LFWCD060S100SS-PM	100-277Vac	60W	25-40V	1000mA	1000mA	87%	UL		
LFWCD060S110SS-PM	100-277Vac	60W	25-40V	1100mA	1100mA	87%	UL		
LFWCD060S120SS-PM	100-277Vac	60W	25-40V	1200mA	1200mA	87%	UL		
LFWCD060S130SS-PM	100-277Vac	60W	25-40V	1300mA	1300mA	87%	UL		
LFWCD060S140SS-PM	100-277Vac	60W	25-40V	1400mA	1400mA	87%	UL		
LFWCD060S150SS-PM	100-277Vac	60W	25-40V	1500mA	1500mA	87%	UL		

■ Technical Data

Input voltage range	100-277Vac
Frequency	47-63Hz
Power factor	> 0.9 under 120~277Vac input with 80~100% load condition (for all output currents)
THD < 15% under 120~277Vac input with 80~100% load condition (for all output of	

Compliant DIMMABLE LED DRIVER

> *Product images are for illustrative purposes only and may vary from actual design.



60W, 100-277Vac Input, Constant Current LED Driver

■ Technical Data(cont.)

Current accuracy	±3%
Efficiency	87%@100-277Vac & 100% load (see charts)
Output Voltage	25-40V
Protection	Open circuit protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.
Dimensions LxWxH	180x76x33mm
Weight	TBD
Packing	28pcs/carton; Carton 485x342x201mm

■ Safety Compliance

Safety Standard	GB19510.1, GB19510.14; EN61347-1, EN61347-2-13; UL8750, CSA C22.2 No. 250.13-12				
Dielectric Strength	I/P-OP:3750Vac/5mA/60S				
Insulation Resistance	nsulation Resistance I/P-O/P: > 10M Ohms/500Vdc/25°C/70% RH				
Leakage Current	The leakage current shall be less than 0.25mA for Class 2 at maximum input voltage				
EMI	GB17743, GB17625.1; EN55015, EN61000-3-2, EN61000-3-3				
EMS EN61000-4-2,3,4,5,6,8,11, EN61547					

Notes:

- 1. The parameters above including the power factor, THD, efficiency are all tested under the ambient temperature 25°C and humidity 50%, AC input 230V and 90% output load.
- 2. lo is rated output current.

Dimming Features

Dimming Function		0-10V			PWM			RX				
		√			√			√				
%	0	10	20	30	40	50	60	70	80	90	100	open
0-10V	0	9.4%	21.65%	33.23%	45.29%	57.64%	69.8%	82.05%	94.01%	100%	100%	100%
PWM	0	10.92%	25.54%	39.31%	52.04%	64%	75.02%	85.37%	94.58%	100%	100%	100%
RX	0	9.4%	21.65%	32.23%	45.29%	57.64%	69.8%	82.05%	94.01%	100%	100%	100%

Notes:


- 1. % refers to the percentage of the dimming signal.
- 2. 0-10V, PWM, RX refers to three different dimming functions, the percentage of the output current for the corresponding dimming signal percentages.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com
February 5, 2019




60W, 100-277Vac Input, Constant Current LED Driver

■ Mechanical Diagram

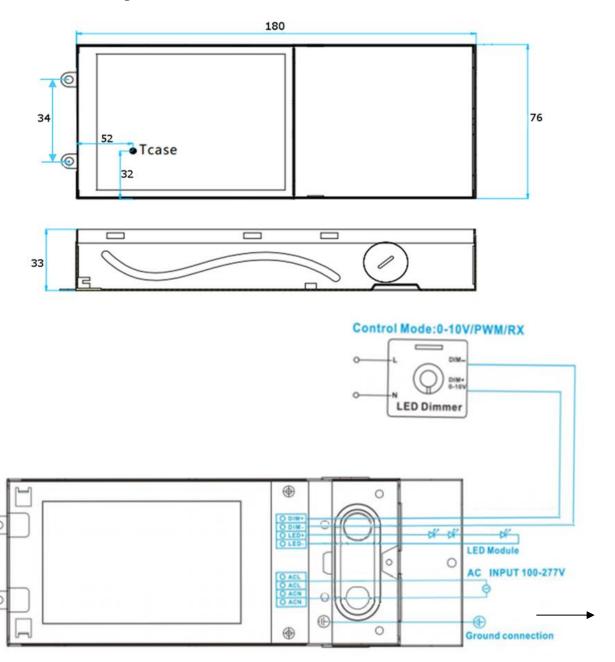

60W, 100-277Vac Input, Constant Current LED Driver

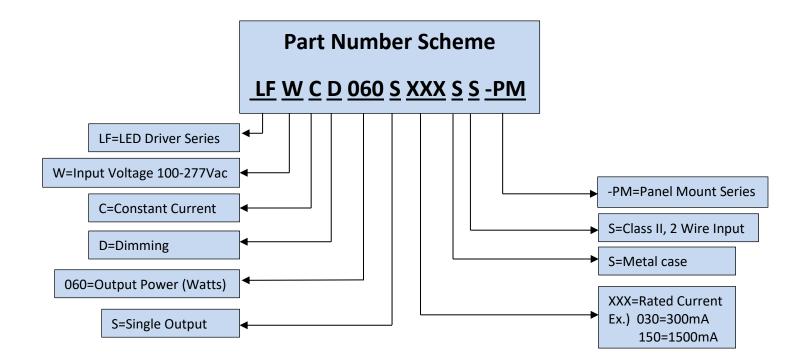

*Product images are for illustrative purposes only and may vary from actual design.

*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.