



T&B[®] Surface Raceway Systems

Overview	2-3
Selection Guide	4-5
Metallic Surface Raceway	6-33
Nonmetallic Surface Raceway	34-58
Multi-Outlet Systems	59-65
T&B Power Poles	66-68
Technical Information	69-108

Thomas&Betts

T&B Wire Management Systems

Overview



Flexible Solutions...

Thomas & Betts offers a comprehensive line of wire management solutions for the electrical industry. Whether you are building a new facility or retrofitting an existing one, our broad range of products allows you to go “over, under, around, or through” to a flexible wire management system for constantly changing power and data requirements. Our flexible manufacturing capabilities enable us to provide custom-engineered solutions for unique electrical and datacom wiring applications.

Metallic Raceway

- Available in a full range of sizes, from small one-piece raceway to large, three-compartment, two-piece raceway.
- Pre-wired multi-outlet assemblies allow quick installation of high-density power applications.

Nonmetallic Raceway

- Small raceways are available in a two-piece configuration and a convenient, one-piece latching style.
- New large multi-compartment raceway accommodates all your power and communication cabling needs.
- Large raceway will accept industry-standard power and data faceplates to match existing décor.



T&B Power Poles



- Provide a flexible solution for bringing power, voice and data cabling from a drop-ceiling to a work area or retail counter.
- Customized poles available to meet your specific application needs.

Thomas & Betts

T&B Surface Raceway Systems

Overview



Small Metallic Surface Raceway System

Small metallic surface raceway is ideal for installations requiring small amounts of cable. Attractive baked enamel ivory finish complements most decor, or can be painted to match other custom schemes. A wide variety of fittings and boxes (up to 6-gang) is available to accommodate the most demanding application requirements. Available in 5', 8', and 10' lengths – the 8' length to run from ceiling to receptacle height with no waste of material.



Large Metallic Surface Raceway System

Thomas & Betts offers a variety of large metallic raceway that accommodates multiple conductor needs. These raceways are in 3 standard sizes with a 4th larger version available on a made-to-order basis. This system is designed with many faceplates to fit a large variety of power, data and telecommunication needs. Low voltage separators are also available for complex data/voice applications. Separators are welded in place eliminating labor in the field.




Small Nonmetallic Surface Raceway System

Thomas & Betts nonmetallic surface raceway offers unique innovations and a wide variety of features for multiple power and data distribution needs. Both one-piece hinged raceway and two-piece systems are UL Listed for up to 600V installations. They utilize common fittings, reducing inventory. The flexible hinge feature provides extra strength and crush resistance. Thomas & Betts nonmetallic surface raceway is made of lightweight high-impact PVC and comes with a complete line of fittings and accessories, including radius fittings for Category 5e and fiber optic cable.




Large Nonmetallic Surface Raceway System

The large two-compartment Nonmetallic Surface Raceway system meets a wide range of power and data distribution needs. This labor-saving system is easy to cut and mounts quickly to any surface. Its rounded base section corners prevent dust and dirt accumulation for a consistent clean look. A one-cover option offers a seamless appearance, covering both channels, while the two-cover version enables convenient access for multiple installers. Each compartment is the width of a single-gang faceplate, which makes the system interchangeable with Nevada Western® datacom plates and all other standard faceplates. The system includes fittings designed for radius bends to accommodate Category 6 and fiber optic cables.

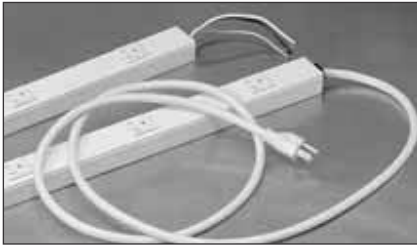

Multi-Outlet Surface Raceway

The Multi-Outlet System offers significant installation advantages. With a larger wireway area, there is no need for special wire connectors or entrance fittings to pull up to four extra #12 conductors. The deeper profile allows wiring from the back without special fittings. Available in single and double circuit models, as well as isolated ground versions. Cord-ended units with integrated on/off switch and circuit breaker compliment the prewired strips.

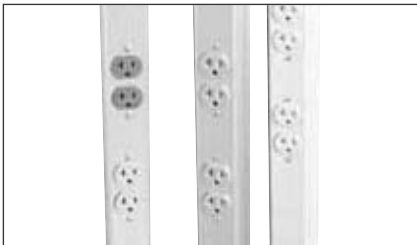

Power Poles



Flexible, economical, adaptable, compact, T&B power poles offer an efficient means of installing electrical, telephone, and computer services. Since all services are fed from above a recessed ceiling, relocation is easy. Isolated ground poles and blank vertical drop poles bring specialized services to modular furniture and open office locations. T&B poles are adaptable; additional compartments can be snapped on to an existing pole to meet changing needs.

Thomas & Betts


T&B Surface Raceway Systems

Selection Guide


METALLIC

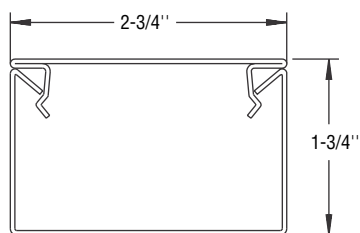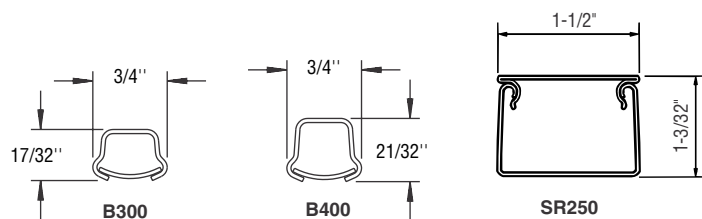


SR500

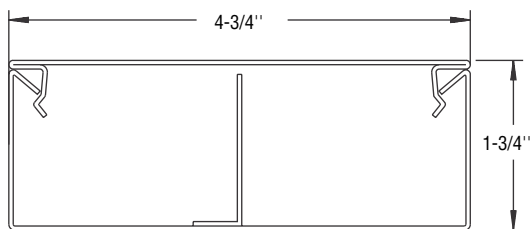

SR600(B)

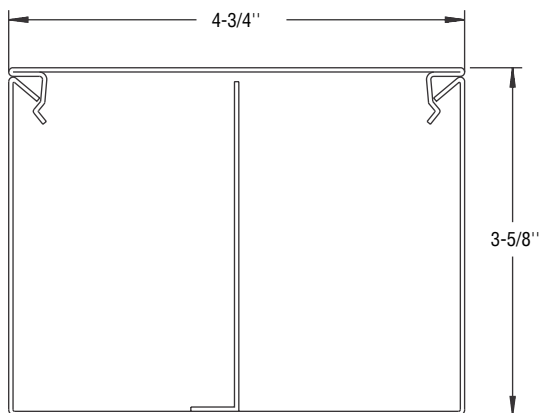


SR700(B)

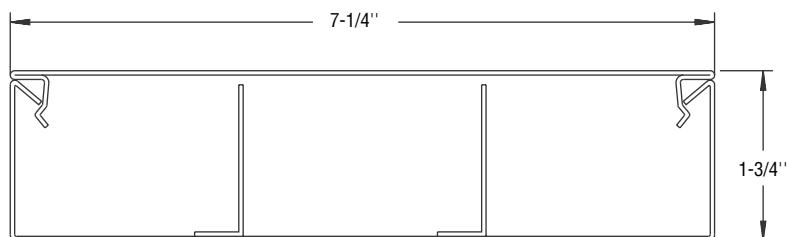


SR800

MULTI-OUTLET




Two-Piece SC/DC Series



Three-Piece SS/DS Series




POWER POLES

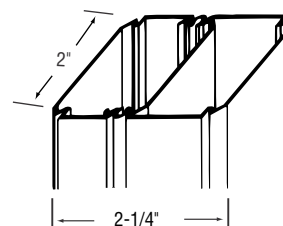


T&B Surface Raceway Systems

Selection Guide


NONMETALLIC

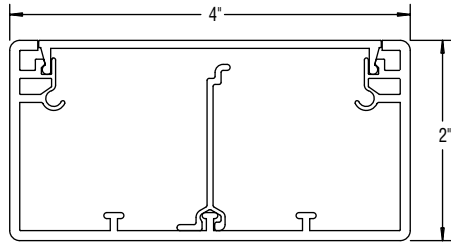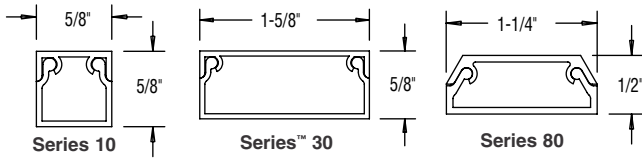

Series 90 Cove Molding

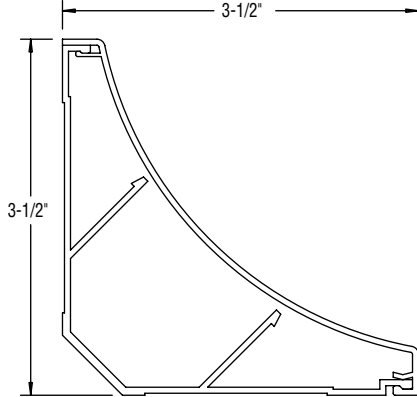


Series 900 Cove Molding

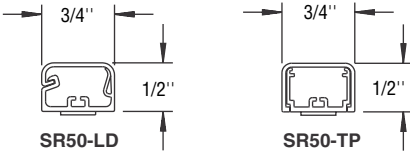


SR50-LD

SR50-TP

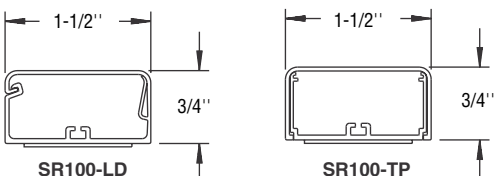


SR100-LD


SR100-TP

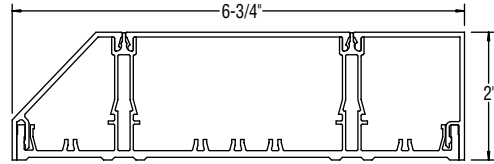


Prestige Series 120

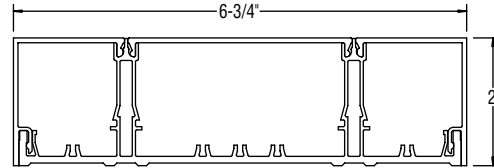


Prestige Series 130

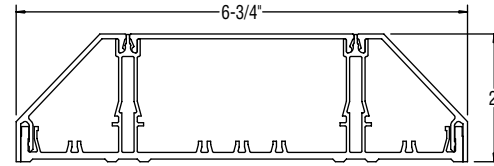


Prestige Series 140

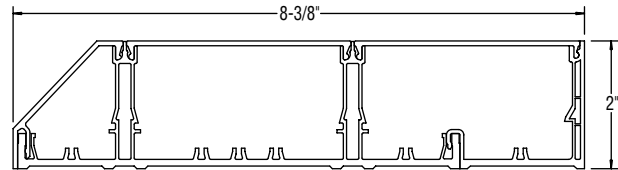


Prestige Series 160

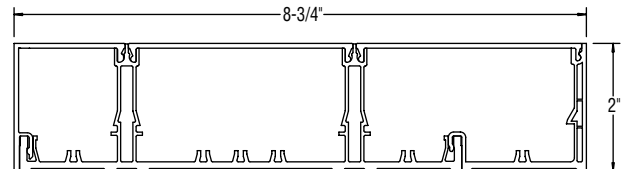

Prestige Series 170

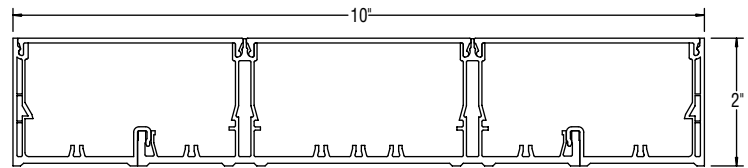

Prestige Series 180

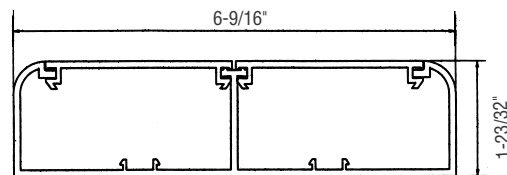

NM600

Thomas & Betts


T&B Surface Raceway Systems

Small Metallic Surface Raceway



B300 and B400 Series Raceway


The One-Piece Surface Raceway System is an attractive, convenient and cost effective way to add outlets wherever they are needed. The Ivory Surface Raceway mounts on any interior wall and offers a comprehensive choice of fittings, elbows and boxes to provide you the versatility that you need. Optional 8 foot raceway lengths can run from ceiling to receptacle height eliminating excess material. New device boxes up to 6-gang provide for the mounting of all device options. Alarm and life safety devices can now be surface mounted to matching red two-gang boxes.

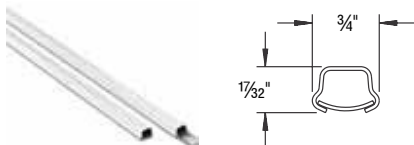

- Off-white cover finish with galvanized base.
- .040" steel (nominal).
- Furnished with one B3401 coupling per length of channel.

B300 Series – Shallow One-Piece Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B300-5	5' length, individually poly-bagged. Packed 20 per carton.	—	100 ft.
B300-8	8' length. Packed 12 per carton.	—	96 ft.
B300-10	10' length. Packed 10 per carton.	—	100 ft.

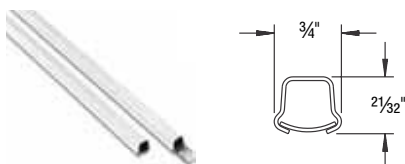

- Off-white cover finish with galvanized base.
- .040" steel (nominal).
- Furnished with one B3401 coupling per length of channel.

B400 Series – Deep One-Piece Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B400-5	5' length, individually poly-bagged. Packed 20 per carton.	—	100 ft.
B400-8	8' length. Packed 12 per carton.	—	96 ft.
B400-10	10' length. Packed 10 per carton.	—	100 ft.

B300 Series – Fittings

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B302	Insulated Bushing – Protects wire and cable insulation.	—	50
B304	Raceway Support Clip – Two screw holes for mounting raceway.	—	50
B306	Raceway Connection Cover – To cover the ends of raceway sections. Hides uneven cuts or rough edges.	—	50
B311	90° Flat Elbow – For right angle turns on the same surface.	5	50
B317	Inside Elbow – For internal corners.	5	50
B318	Outside Elbow – For turns on external corner surfaces.	5	50



B-302




B-304




B-306



B-311

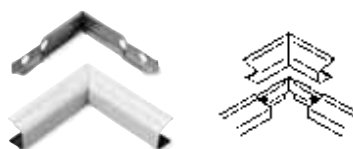

B-317

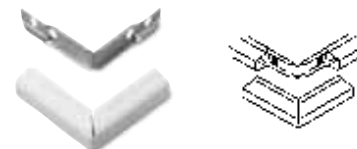

B-318

Thomas & Betts

T&B Surface Raceway Systems

Small Metallic Surface Raceway




B-402



B-404




B-406

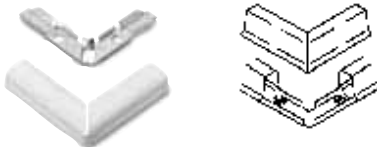


B-411

B400 Series – Fittings

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B402	Insulating Bushing—Protects wires from abrasion.	—	50
B404	Raceway Support Strap—Two screw holes for mounting raceway.	—	50
B406	Raceway Connection Cover—To cover the ends of raceway sections. Hides uneven cuts or rough edges.	—	50
B411	90° Flat Elbow – For right angle turns on the same surface.	5	50
B417	90° Inside Elbow – For surfaces at right angle.	5	50
B418	90° Outside Elbow – For surfaces at right angle.	5	50

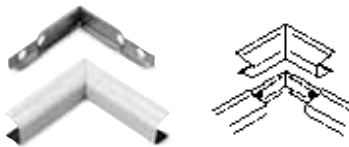

B-417

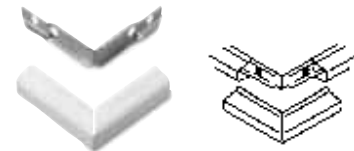

B-418

T&B Surface Raceway Systems

Small Metallic Surface Raceway



B-3400F



B3401



B3403



B3411-RH



B3411-LH



B3415



B3419



B3481A



B3482A



B3481



B3482



B3485



Transitional Fittings – For 300 & 400 Series

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B3400F	Flexible Section – For getting around curved surfaces or obstructions.	1	10
B3401	Coupling – Joins lengths of raceway sections. One furnished with each length of raceway.	–	50
B3403	Supporting Clip – To support Raceway. Raceway is snapped into fitting, hiding the mounting screw.	–	50
B3411-RH	90° Right Hand Twist Elbow – For 90° twist with 90° turn.	5	50
B3411-LH	90° Left Hand Twist Elbow – For 90° twist with 90° turn.	5	50
B3415	Tee Fitting.	1	10
B3419	Corner Box – Splice box with ½" K.O. in base.	–	10
B3481	Box Connector (Galvanized) – ½" male.	10	100
B3481A	Box Connector (Galvanized) – ¾" male.	10	100
B3482	Conduit Connector (Galvanized) – ½" female.	10	100
B3482A	Conduit Connector (Galvanized) – ¾" female.	10	100
B3485	Combination Connector – For connecting raceway to outlet boxes with ½" K.O.	1	10

T&B Surface Raceway Systems

Small Metallic Surface Raceway



B3436

Device Boxes – For 300 and 400 Series

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B3436	Round Blank Cover – To convert all round boxes to a blank junction box. Has ½" trade size K.O. To hang lightweight fixtures.	1	5



B3437



Round Extension Boxes

Cat. No.	Diameter	Depth	Std. Ctn.	Std. Pkg.
B3437	4¾"	1"	1	10
B3437A	5½"	1"	1	10
B3439A	6¾"	1"	1	10

- Open base for mounting on existing in-wall conduit boxes.
- Covers have mounting screw centers of 2¾", 3½" or 4⅞"



B3438A



Round Fixture Boxes

Cat. No.	Diameter	Depth	Std. Ctn.	Std. Pkg.
B3438	4¾"	1"	1	10
B3438A	5½"	1"	1	10
B3439	6¾"	1"	1	10

- Solid base for hanging fixtures.
- Cover accepts any device with 2¾", 3½" or 4⅞" screw mounting centers.
- Five ½" trade size K.O.'s and raised center section for no-bolt fixture stud.

T&B Surface Raceway Systems

Small Metallic Surface Raceway



B34240



Switch Box

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B34240	Furnished with 15A, 120V single pole switch. Will accommodate other commercially available single pole and 3-way single gang switches. Base has ½" trade size K.O.	1	10



B34242



Blank Utility Box

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B34242	Junction or pull box with ½" trade size K.O. in base and cover.	1	10



B34243G



Duplex Receptacle Box

Cat. No.	Description	Std. Ctn.	Std. Pkg.
B34243G	Furnished with 15A, 120V duplex receptacle. Accepts other NEMA 5-15R or NEMA 5-20R duplex devices. Base has ½" trade size knockout.	1	10



B3444



Extra Deep Switch and Receptacle Box

Cat. No.	Length	Width	Depth	No. of Gangs	Std. Ctn.	Std. Pkg.
B3444	4⅝"	2⅞"	2¾"	1	1	5
B3444-2	4⅝"	4¾"	2¾"	2	1	5
B3444-3	4⅝"	6½"	2¾"	3	—	1



B3447



Deep Switch and Receptacle Box

Cat. No.	Length	Width	Depth	No. of Gangs	Std. Ctn.	Std. Pkg.
B3444S	4⅝"	2⅞"	2¼"	1	1	5

Shallow Switch and Receptacle Box

Cat. No.	Length	Width	Depth	No. of Gangs	Std. Ctn.	Std. Pkg.
B3447	4⅝"	2⅞"	1⅝"	1	1	10
B3447-2	4⅝"	4¾"	1⅝"	2	1	10

Thomas & Betts

T&B Surface Raceway Systems

Small Metallic Surface Raceway



B3448



Switch and Receptacle Box

Cat. No.	Length	Width	Depth	No. of Gangs	Std. Ctn.	Std. Pkg.
B3448	4 $\frac{5}{8}$ "	2 $\frac{7}{8}$ "	1 $\frac{3}{4}$ "	1	1	5
B3448-2	4 $\frac{5}{8}$ "	4 $\frac{3}{4}$ "	1 $\frac{3}{4}$ "	2	1	10
B3448-3	4 $\frac{5}{8}$ "	6 $\frac{1}{2}$ "	1 $\frac{3}{4}$ "	3	1	5
B3448-4	4 $\frac{5}{8}$ "	8 $\frac{1}{32}$ "	1 $\frac{3}{4}$ "	4	—	1
B3448-5	4 $\frac{5}{8}$ "	10 $\frac{5}{32}$ "	1 $\frac{3}{4}$ "	5	—	1
B3448-6	4 $\frac{5}{8}$ "	11 $\frac{3}{32}$ "	1 $\frac{3}{4}$ "	6	—	1



B3448S



Shallow Switch and Receptacle Box

Cat. No.	Length	Width	Depth	No. of Gangs	Std. Ctn.	Std. Pkg.
B3448S	4 $\frac{5}{8}$ "	2 $\frac{7}{8}$ "	1"	1	1	10



B3451



Extension Adapter Box

Cat. No.	Length	Width	Depth	No. of Gangs	Std. Ctn.	Std. Pkg.
B3451	4 $\frac{5}{8}$ "	2 $\frac{7}{8}$ "	1"	1	1	10
B3451-2	4 $\frac{5}{8}$ "	4 $\frac{3}{4}$ "	1"	2	1	10
B3451-3	4 $\frac{5}{8}$ "	6 $\frac{1}{2}$ "	1"	3	—	5

To extend from existing in-wall box.



B3452-2R

Fire Alarm Box

Cat. No.	Length	Width	Depth	No. of Gangs	Std. Ctn.	Std. Pkg.
B3452-2R	4 $\frac{11}{16}$ "	4 $\frac{11}{16}$ "	1 $\frac{3}{8}$ "	-	1	5
B3453-2R	4 $\frac{11}{16}$ "	4 $\frac{11}{16}$ "	2 $\frac{3}{4}$ "	-	1	5

- For mounting of alarm and life safety devices that fit 4" square boxes.
- Cover has 3 twistouts on each side.
- Base has rectangular K.O. with $\frac{1}{8}$ " and $\frac{3}{4}$ " concentric knockouts.
- Red finish.

Touch-Up Paint

Cat. No.	Description	Std. Ctn.	Std. Pkg.
EW1VPT-12	Ivory Touch-Up Paint	1	24

T&B Surface Raceway Systems


Small Metallic Surface Raceway

Installation Instructions


WARNING: SYSTEM MUST BE INSTALLED BY QUALIFIED ELECTRICAL PERSONNEL IN ACCORDANCE WITH LOCAL CODES. READ THE INFORMATION BELOW CAREFULLY BEFORE PROCEEDING WITH INSTALLATION. FAILURE TO READ AND CAREFULLY FOLLOW ALL INSTRUCTIONS MAY CAUSE ELECTRICAL SHOCK OR FIRE, RESULTING IN SERIOUS BODILY INJURY OR DEATH.

- Raceway should be installed in dry, indoor locations only.
- Always ground entire surface raceway system.


1. LOCATE POWER SOURCE.

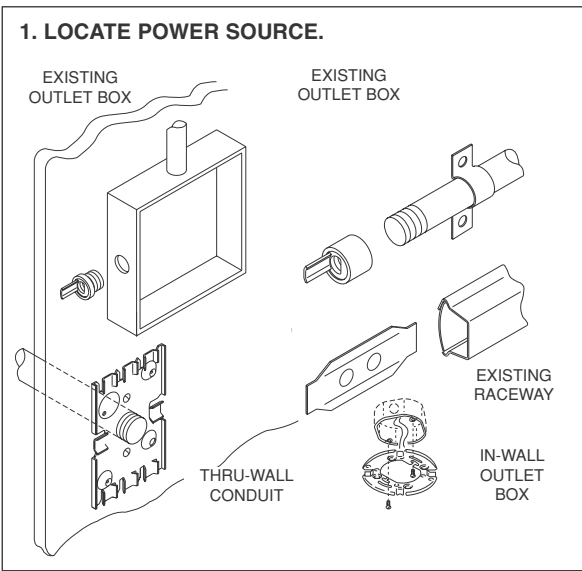


2. LOCATE NEXT COMPONENT AND CUT RACEWAY TO LENGTH.

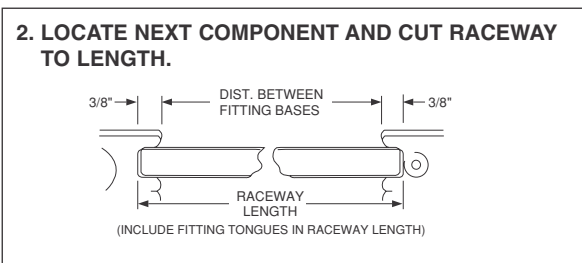


3. MOUNT RACEWAY USING CLIPS, COUPLING, OR STRAPS AS REQUIRED.

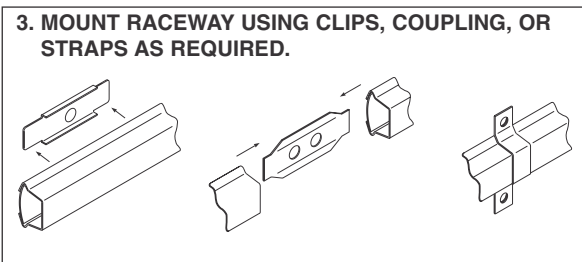


4. INSERT BASE TONGUE UNDER RACEWAY BASE.

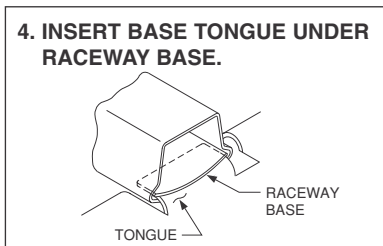


5. INSERT BUSHING IN RACEWAY.

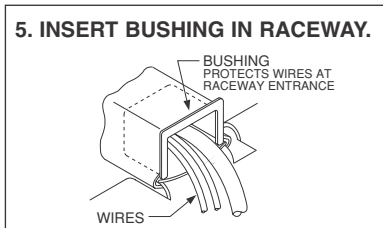


6. ATTACH BASE TO SURFACE USING TWO #8 OR LARGER SCREWS.

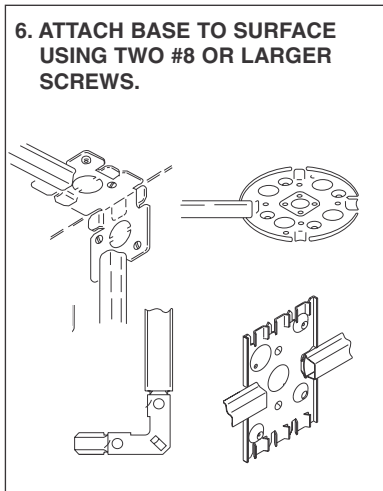


7. USE CONNECTION COVERS TO HIDE JOINTS.

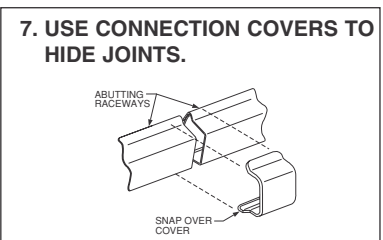


8. PULL WIRES.

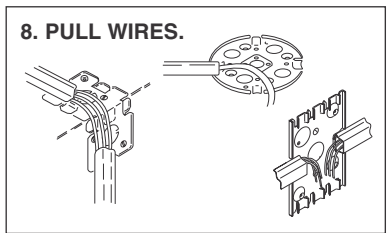

9. REMOVE PROPER TWISTOUTS IN COVERS.

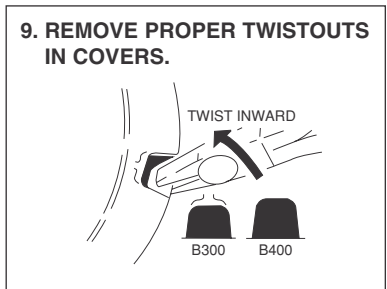

10. MOUNT COVERS TO BASES. FOR BOXES USE SCREWS PROVIDED. FOR FITTINGS SNAP COVER IN PLACE.

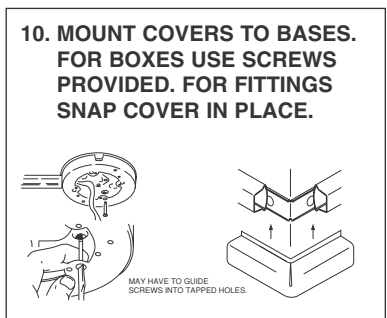

T&B Surface Raceway Systems

Large Metallic Surface Raceway



- Available in 1, 2 or 3 compartments.
- Manufactured from "Satincoat" prepainted galvanized steel.
- Standard colors are Ivory and Gray – custom colors available upon request.
- Available in Aluminum and Stainless Steel.
- Pre-Cut covers for less field cutting.
- Barriers come pre-welded.
- Raceway channel has positive snap in cover.

T&B Metallic Surface Raceway

Exceptional Quality & Finish

T&B Metallic Surface Raceway is a fully UL approved two piece surface raceway system.

Available in four standard sizes, T&B Metallic raceways are all manufactured from "Satincoat" pre-painted galvanized steel for maximum corrosion resistance.

Four Standard Sizes

The four standard sizes are available in 1, 2 or 3 compartments, ranging from 2¼" wide up to 7¼" wide in the case of the SR800 series raceway, the industry's only triple compartment metal raceway.

All series are provided with the same positive snap-in cover for a consistent appearance in facility installations.

Welded in Barriers

T&B raceway is supplied with optional barriers pre-welded in place, eliminating the need for clips or other fastening means, and thereby greatly reducing installation time and accordingly the cost of installation.

Choice of Colors

Standard Color is Ivory or ASA 61 Gray. However, a wide range of alternative colors are readily available and if necessary, special matched colors can be supplied.


This wide range of options is designed to eliminate the need and cost of repainting the raceway to match or blend with finished color schemes.

T&B Surface Raceway Systems

Large Metallic Surface Raceway




SR250V-BSE




SR250



SR250V-C5FT

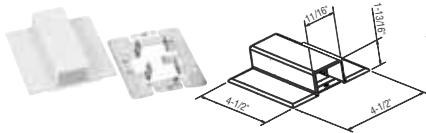


SR250V-AP

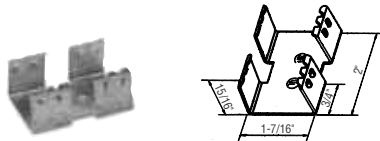


SR250V-C




SR250V-CV

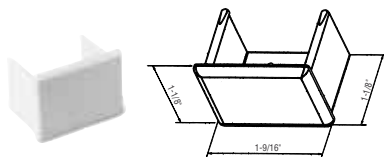


SR250V-EC

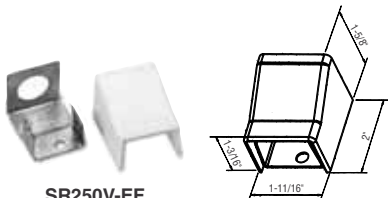

SR250V-EF

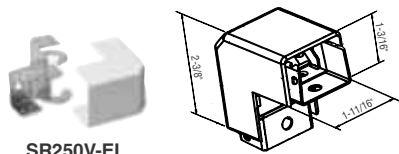

SR250V-EL

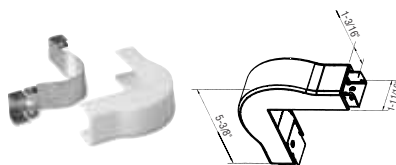

SR250V-ELR

SR250 Raceway Series

The medium-capacity SR250 raceway provides the versatility of three systems: a complete raceway system, pre-wired outlet sections and cord-ended strips.

SR250 Series – Two-Piece Raceway – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250-BSE	Base – 10' lengths, .040" nominal thickness, prepainted galvanized steel.	–	100 ft.
SR250-C5FT	Cover – 5' lengths, .040" nominal thickness, galvanized steel, baked enamel finish.	–	100 ft.

SR250 Series – Two-Piece Raceway – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250V-BSE	Base – 10' lengths, .040" nominal thickness, prepainted galvanized steel.	–	100 ft.
SR250V-C5FT	Cover – 5' lengths, .040" nominal thickness, galvanized steel, baked enamel finish.	–	100 ft.

SR250 Series – Fittings – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250V-AP	Adapter Plate – For feeding SR250 raceway from existing in wall box. Removable section of cover for feeding conductors in middle of raceway run. Plastic cover.	–	5
SR250V-C	Coupler – For connecting sections of raceway base.	–	40
SR250V-CV	Cover Clip – Hides uneven seams or rough cut edges. Plastic cover.	–	40
SR250V-EC	End Cap – Plastic cover finishes end of raceway run.	–	5
SR250V-EF	Entrance End Feed – Feed raceway with conduit, 1/2" trade size K.O. in base. Plastic cover.	–	5
SR250V-EL	External Elbow – To run raceway around outside wall. Plastic cover.	–	5
SR250V-ELR	Radiused External Elbow – Maintains 1 1/2" bend radius for Category 5e and fiber optic cable around outside corner. Plastic cover.	–	5

SR250 Series – Fittings – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250V-AP	Adapter Plate – For feeding SR250 raceway from existing in wall box. Removable section of cover for feeding conductors in middle of raceway run. Plastic cover.	–	5
SR250V-C	Coupler – For connecting sections of raceway base.	–	40
SR250V-CV	Cover Clip – Hides uneven seams or rough cut edges. Plastic cover.	–	40
SR250V-EC	End Cap – Plastic cover finishes end of raceway run.	–	5
SR250V-EF	Entrance End Feed – Feed raceway with conduit, 1/2" trade size K.O. in base. Plastic cover.	–	5
SR250V-EL	External Elbow – To run raceway around outside wall. Plastic cover.	–	5
SR250V-ELR	Radiused External Elbow – Maintains 1 1/2" bend radius for Category 5e and fiber optic cable around outside corner. Plastic cover.	–	5


Thomas & Betts

T&B Surface Raceway Systems


Large Metallic Surface Raceway




SR250V-FL




SR250V-GC




SR250V-IL




SR250V-SC




SR250V-STF



SR250V-T



SR250V-WR



SR250 Series – Fittings – Gray



Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250-FL	Flat Elbow – For 90° turns on same surface. Plastic cover.	–	5
SR250-GC	Ground Clamp – To connect grounding conductor for supplemental raceway ground.	–	5
SR250-IL	Internal Elbow – Raceway runs on inside corner. Plastic cover.	–	5
SR250-SC	Support Clip – Mounts raceway, wired sections or cord-ended units to wall.	–	40
SR250-STF	Side Transition Fittings – To top off run of SR250 raceway to feed B300 or B400 raceway.	–	5
SR250-T	Tee.	–	5
SR250-WR	Wire Retainer – Holds cables/wires in place in raceway base.	–	40
SR2548	Device Box – Twistouts on all sides of cover. Base has 1/2" and 3/4" trade size K.O.s and rectangular K.O. for mounting to existing in-wall box. (4 5/8" L. x 2 7/8" W. x 1 3/4" D.)	–	5
SR2548-2	Two-Gang Device Box – Twistouts on all sides of cover. Base has 1/2" and 3/4" trade size K.O.s and rectangular K.O. for mounting to existing in-wall box. (4 5/8" L. x 4 3/4" W. x 1 3/4" D.)	–	5

SR250 Series – Fittings – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250V-FL	Flat Elbow – For 90° turns on same surface. Plastic cover.	–	5
SR250V-GC	Ground Clamp – To connect grounding conductor for supplemental raceway ground.	–	5
SR250V-IL	Internal Elbow – Raceway runs on inside corner. Plastic cover.	–	5
SR250V-SC	Support Clip – Mounts raceway, wired sections or cord-ended units to wall.	–	40
SR250V-STF	Side Transition Fittings – To top off run of SR250 raceway to feed B300 or B400 raceway.	–	5
SR250V-T	Tee.	–	5
SR250V-WR	Wire Retainer – Holds cables/wires in place in raceway base.	–	40
SR2548V	Device Box – Twistouts on all sides of cover. Base has 1/2" and 3/4" trade size K.O.s and rectangular K.O. for mounting to existing in-wall box. (4 5/8" L. x 2 7/8" W. x 1 3/4" D.)	–	5
SR2548-2V	Two-Gang Device Box – Twistouts on all sides of cover. Base has 1/2" and 3/4" trade size K.O.s and rectangular K.O. for mounting to existing in-wall box. (4 5/8" L. x 4 3/4" W. x 1 3/4" D.)	–	5



SR2548V



SR2548-2V


Thomas & Betts

T&B Surface Raceway Systems

Large Metallic Surface Raceway



SR500-BSE



SR500

SR500 Series Raceway



Excellent capacity for the distribution of branch circuit wiring for labs, studios and workshops. The width of a single gang faceplate, the SR500 raceway permits the mounting of any commercially available faceplate. Short sections of factory cut cover saves installation time. Devices can be mounted on 12", 18", 24" and 36" centers with no cover cutting required.



SR500-C5FT

SR500 Series – Two-Piece Raceway – Gray


Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR500-BSE	Base – 10' long, packed 5 per carton	–	50 ft.
SR500-C5FT	Cover – 5' long, packed 10 per carton	–	50 ft.
SR500-C12	Cover – 7.5" long, pre-cut to place devices 12" on-center	–	10
SR500-C18	Cover – 13.5" long, pre-cut to place devices 18" on-center	–	10
SR500-C24	Cover – 19.5" long, pre-cut to place devices 24" on-center	–	10
SR500-C36	Cover – 31.5" long, pre-cut to place devices 36" on-center	–	5

SR500 Series – Two-Piece Raceway – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR500V-BSE	Base – 10' long, packed 5 per carton	–	50 ft.
SR500V-C5FT	Cover – 5' long, packed 10 per carton	–	50 ft.
SR500V-C12	Cover – 7.5" long, pre-cut to place devices 12" on-center	–	10
SR500V-C18	Cover – 13.5" long, pre-cut to place devices 18" on-center	–	10
SR500V-C24	Cover – 19.5" long, pre-cut to place devices 24" on-center	–	10
SR500V-C36	Cover – 31.5" long, pre-cut to place devices 36" on-center	–	5

T&B Surface Raceway Systems


Large Metallic Surface Raceway

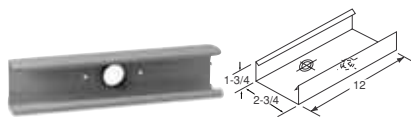


SR500-BF




SR500-EC




SR500-EF




SR500-C




SR500-EL




SR500-EL45



SR500-FL



SR500-FL45



SR500 Series – Elbows and Fittings – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR500-BF	Back Feed (1 $\frac{3}{8}$ " hole cut for wire feed)	1	20
SR500-C	Coupling	10	200
SR500-EC*	End Blank	5	100
SR500-EF*	End Feed	1	20
SR500-EL	90° External Elbow – for surfaces at right angles	1	20
SR500-EL45	45° External Elbow – for surfaces at 45° angles	1	20
SR500-FL	90° Flat Elbow – for right angle turns on the same surface	1	20
SR500-FL45	45° Flat Elbow – for angled turns on the same surface	1	20
SR500-IL	90° Internal Elbow – for surfaces at right angles	1	20
SR500-IL45	45° Internal Elbow – for surfaces at 45° angles	1	20
SR500-PF	Panel Flange	1	20
SR500-T	Tee Fitting	1	20
SR500-STF	Side transition fitting from SR500 to SR250 Raceway		
SR500-WR	Wire Retainer	10	200

*NOTE: Knockouts are $\frac{1}{2}$ " and $\frac{3}{4}$ " concentric.



SR500 Series – Elbows and Fittings – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR500V-BF	Back Feed (1 $\frac{3}{8}$ " hole cut for wire feed)	1	12
SR500V-C	Coupling	10	200
SR500V-EC*	End Blank	1	20
SR500V-EF*	End Feed	1	20
SR500V-EL	90° External Elbow – for surfaces at right angles	1	20
SR500V-EL45	45° External Elbow – for surfaces at 45° angles	1	20
SR500V-FL	90° Flat Elbow – for right angle turns on the same surface	1	20
SR500V-FL45	45° Flat Elbow – for angled turns on the same surface	1	20
SR500V-IL	90° Internal Elbow – for surfaces at right angles	1	20
SR500V-IL45	45° Internal Elbow – for surfaces at 45° angles	1	20
SR500V-PF	Panel Flange	1	20
SR500V-STF	Side transition fitting from SR500V to SR250V Raceway		
SR500V-T	Tee Fitting	1	20


*NOTE: Knockouts are $\frac{1}{2}$ " and $\frac{3}{4}$ " concentric.




SR500-IL




SR500-T





SR500-IL45



SR500-WR



SR500-PF



SR500-STF

Thomas & Betts

T&B Surface Raceway Systems

Large Metallic Surface Raceway



SR500P-D



SR500P-G



SR500P-L



SR500P-S



SR500P-H

SR500 Series – Face Plates – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR500P-D	Single Duplex	1	20
SR500P-G	Single Decora Opening (GFCI)	1	20
SR500P-L	Single Opening for commercially available face plates	1	20
SR500P-S	Single Receptacle (1.40" dia.)	1	20
SR500P-H	Single Receptacle (1.59" dia.)	1	20
SR500P-T	Single Telephone	1	20
SR500P-C	7/8" Grommeted Opening	1	20
SR500P-B	Blank Plate	1	20
SR500P-W	Single Switch Opening	1	20

SR500 Series – Face Plates – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR500VP-D	Single Duplex	1	20
SR500VP-G	Single Decora Opening (GFCI)	1	20
SR500VP-L	Single Opening for commercially available face plates	1	20
SR500VP-S	Single Receptacle (1.40" dia.)	1	20
SR500VP-H	Single Receptacle (1.59" dia.)	1	20
SR500VP-T	Single Telephone	1	20
SR500VP-C	7/8" Grommeted Opening	1	20
SR500VP-B	Blank Plate	1	20
SR500VP-W	Single Switch Opening	1	20



SR500P-T



SR500P-C




SR500P-B

NOTE: Custom plates available. See page 36.

Thomas & Betts

T&B Surface Raceway Systems

Large Metallic Surface Raceway

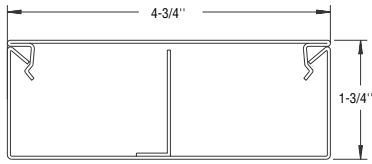

SR600(B)



SR600VB-BSE



SR600V-BSE



SR600V-C5FT

SR600 Series Raceway


The SR600 raceway is the choice for perimeter wiring distribution around commercial facilities - anywhere you desire a clean accessible wiring system. The low-profile divided raceway brings power wiring and voice/data network cabling to all office locations. Cover plates permit the easy mounting of Nevada Western® connectivity solutions - Category 5e, coax, f connectors and SC/ST fiber connectors. Get the labor savings you need with pre-cut cover sections - place devices on 12", 18", 24" and 36" spacings without cutting the covers.

SR600 Series – Two-Piece Raceway – Gray


Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600B-BSE	Base with barrier – 10' long, packed 4 per carton	–	40 ft.
SR600-BSE	Base – 10' long, packed 4 per carton	–	40 ft.
SR600-C5FT	Cover – 5' long, packed 8 per carton	–	40
SR600-C12	Cover – 7.5" long, pre-cut to place devices 12" on-center	–	10
SR600-C18	Cover – 13.5" long, pre-cut to place devices 18" on-center	–	10
SR600-C24	Cover – 19.5" long, pre-cut to place devices 24" on-center	–	10
SR600-C36	Cover – 31.5" long, pre-cut to place devices 36" on-center	–	5

SR600 Series – Two-Piece Raceway – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600VB-BSE	Base with barrier – 10' long, packed 4 per carton	–	40 ft.
SR600V-BSE	Base – 10' long, packed 4 per carton	–	40 ft.
SR600V-C5FT	Cover – 5' long, packed 8 per carton	–	40
SR600V-C12	Cover – 7.5" long, pre-cut to place devices 12" on-center	–	10
SR600V-C18	Cover – 13.5" long, pre-cut to place devices 18" on-center	–	10
SR600V-C24	Cover – 19.5" long, pre-cut to place devices 24" on-center	–	10
SR600V-C36	Cover – 31.5" long, pre-cut to place devices 36" on-center	–	5

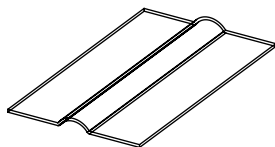

SR600-DIV



SR600-DIV-CLIP

SR600 Series – Divider and Clip








Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600-DIV	Field-installable divider for SR600 Raceway. 5 ft. lengths.	–	50
SR600-DIV-CLIP	Retainer clip for SR600-DIV. One required every 2½" ft.	5	50

NOTE: Not required for SR600B-BSE and SR600VB-BSE (barrier pre-installed on those items.)

Thomas & Betts

T&B Surface Raceway Systems

Large Metallic Surface Raceway



SR600B Series – Elbows with Barriers – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600B-EL	90° External Elbow For surfaces at right angles	1	20
SR600B-EL45	45° External Elbow For surfaces at 45° angles	1	20
SR600B-FL	90° Flat Elbow For right angle turns on the same surface	1	20
SR600B-FL45	45° Flat Elbow For angled turns on the same surface	1	20
SR600B-IL	90° Internal Elbow For surfaces at right angles	1	20
SR600B-IL45	45° Internal Elbow For surfaces at 45° angles	1	20
SR600B-T	Divided Tee Fitting with internal crossovers and barriers to separate services.	1	20
SR600B-ELFO	2" Radius External Elbow for SR600	1	10
SR600B-ILFO	2" Radius Internal Elbow for SR600	1	10
SR600B-FLFO	2" Radius Flat Elbow for SR600	1	10
SR600B-TFO	2" Radius Divided Tee for SR600	1	10








SR600 Series – Elbows – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600-EL	90° External Elbow For surfaces at right angles	1	20
SR600-EL45	45° External Elbow For surfaces at 45° angles	1	20
SR600-FL	90° Flat Elbow For right angle turns on the same surface	1	20
SR600-FL45	45° Flat Elbow For angled turns on the same surface	1	20
SR600-IL	90° Internal Elbow For surfaces at right angles	1	20
SR600-IL45	45° Internal Elbow For surfaces at 45° angles	1	20
SR600-T	Tee Fitting	1	20



T&B Surface Raceway Systems

Large Metallic Surface Raceway



SR600B Series – Elbows with Barriers – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600VB-EL	90° External Elbow For surfaces at right angles	1	20
SR600VB-EL45	45° External Elbow For surfaces at 45° angles	1	20
SR600VB-FL	90° Flat Elbow For right angle turns on the same surface	1	20
SR600VB-FL45	45° Flat Elbow For angled turns on the same surface	1	20
SR600VB-IL	90° Internal Elbow For surfaces at right angles	1	20
SR600VB-IL45	45° Internal Elbow For surfaces at 45° angles	1	20
SR600VB-T	Divided Tee with internal crossovers and barriers to separate services.	1	20
SR600VB-ELFO	2" Radius External Elbow for SR600	1	10
SR600VB-ILFO	2" Radius Internal Elbow for SR600	1	10
SR600VB-FLFO	2" Radius Flat Elbow for SR600	1	10
SR600VB-TFO	2" Radius Divided Tee for SR600	1	10

SR600 Series – Elbows – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600V-EL	90° External Elbow For surfaces at right angles	1	20.
SR600V-EL45	45° External Elbow For surfaces at 45° angles	1	20
SR600V-FL	90° Flat Elbow For right angle turns on the same surface	1	20
SR600V-FL45	45° Flat Elbow For angled turns on the same surface	1	20
SR600V-IL	90° Internal Elbow For surfaces at right angles	1	20
SR600V-IL45	45° Internal Elbow For surfaces at 45° angles	1	20
SR600V-T	Tee Fitting	1	20




T&B Surface Raceway Systems


Large Metallic Surface Raceway




SR600V-BF




SR600-C




SR600V-EC




SR600V-EF



SR600V-PF



SR600-WR



SR600 Series – Fittings – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600-BF	Back Feed (1 1/8" hole cut to feed wire)	1	20
SR600-C	Coupling	10	200
SR600-EC*	End Blank	5	100
SR600-EF*	End Feed	1	20
SR600-PF	Panel Flange	1	20
SR600-WR	Wire Retainer	5	100

SR600 Series – Fittings – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600V-BF	Back Feed (1 1/8" hole cut to feed wire)	1	20
SR600-C	Coupling	10	200
SR600V-EC*	End Blank	5	100
SR600V-EF*	End Feed	1	20
SR600V-PF	Panel Flange	1	20
SR600V-WR	Wire Retainer	5	100

*NOTE: Knockouts are 1/2" and 3/4" concentric.

T&B Surface Raceway Systems

Large Metallic Surface Raceway



SR600VP-D



SR600VP-DC



SR600VP-DD



SR600VP-DT



SR600VP-DTT



SR600VP-G

Standard Device Plates for SR-600 Surface Raceway – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600P-D	Single Duplex	1	20
SR600P-DC	Combination Duplex / 7/8" Grommeted Opening	1	20
SR600P-DD	Double Duplex	1	20
SR600P-DT	Single Duplex with Single Telephone Opening	1	20
SR600P-DTT	Single Duplex with Two Modular Jack Openings	1	20
SR600P-G	Single Decora Opening (GFCI)	1	20
SR600P-GG	Double Decora Opening (GFCI)	1	20
SR600P-SC	Combination Single Receptacle (1.40 dia.) / 7/8" Grommeted Opening	1	20
SR600P-HC	Combination Single Receptacle (1.59 dia.) / 7/8" Grommeted Opening	1	20
SR600P-L	Single Opening for Commercially Available Face Plates	1	20
SR600P-LL	Double Opening for Commercially Available Face Plates	1	20
SR600P-C	Single 7/8" Grommeted Opening	1	20
SR600P-B	Blank Plate for 600P Series	1	20

NOTE: 600P Series device plates used for SR600B, SR600, SR700B and SR700 series raceways.

Standard Device Plates for SR-600 Surface Raceway – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600VP-D	Single Duplex	1	20
SR600VP-DC	Combination Duplex / 7/8" Grommeted Opening	1	20
SR600VP-DD	Double Duplex	1	20
SR600VP-DT	Single Duplex with Single Telephone Opening	1	20
SR600VP-DTT	Single Duplex with Two Modular Jack Openings	1	20
SR600VP-G	Single Decora Opening (GFCI)	1	20
SR600VP-GG	Double Decora Opening (GFCI)	1	20
SR600VP-SC	Combination Single Receptacle (1.40 dia.) / 7/8" Grommeted Opening	1	20
SR600VP-HC	Combination Single Receptacle (1.59 dia.) / 7/8" Grommeted Opening	1	20
SR600VP-L	Single Opening for Commercially Available Face Plates	1	20
SR600VP-LL	Double Opening for Commercially Available Face Plates	1	20
SR600VP-C	Single 7/8" Grommeted Opening	1	20
SR600VP-B	Blank Plate for 600P Series	1	20

NOTE: 600P Series device plates used for SR600B, SR600, SR700B and SR700 series raceways.



SR600VP-SC



SR600VP-L



SR600VP-C



SR600VP-GG



SR600VP-HC



SR600VP-LL




SR600VP-B

NOTE: Custom plates available. See page 36.

Thomas & Betts

T&B Surface Raceway Systems

Large Metallic Surface Raceway

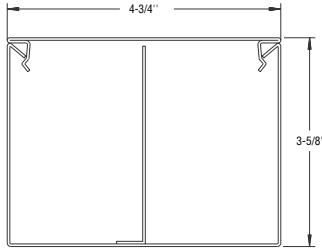

SR700(B)



SR700B-BSE



SR700-BSE



SR600V-C5FT

SR700 Series Raceway



The extra large capacity of the SR700 series is the popular choice for locations with heavy concentration of power and communication wiring. Underfloor distribution for computer rooms, overhead cable conveyance for factory lighting or for electrical distribution to manufacturing equipment – the right choice is the SR700 raceway. In subtly attractive gray or ivory finish, the SR700 utilizes the same raceway cover and device mounting plates as the SR600 lower profile raceway.

SR700 Series – Two-Piece Raceway – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR700B-BSE	Base with barrier – 10' Long Packed 2 per Carton	–	20 ft.
SR700-BSE	Base – 10' Long Packed 2 per Carton	–	20 ft.
SR600-C5FT	Cover - 5' Long Packed 8 per Carton	–	40 ft.
SR600-C12	Cover - 7.5' Long Pre-Cut to place Devices 12" on center	–	10
SR600-C18	Cover - 13.5' Long Pre-Cut to place Devices 18" on-center	–	10
SR600-C24	Cover - 19.5' Long Pre-Cut to place Devices 24" on-center	–	10
SR600-C36	Cover - 31.5' Long Pre-Cut to place Devices 36" on-center	–	5

SR700 Series – Two-Piece Raceway – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR700VB-BSE	Base with barrier – 10' Long Packed 2 per Carton	–	20 ft.
SR700V-BSE	Base – 10' Long Packed 2 per Carton	–	20 ft.
SR600V-C5FT	Cover - 5' Long Packed 8 per Carton	–	40 ft.
SR600V-C12	Cover - 7.5' Long Pre-Cut to place Devices 12" on center	–	10
SR600V-C18	Cover - 13.5' Long Pre-Cut to place Devices 18" on-center	–	10
SR600V-C24	Cover - 19.5' Long Pre-Cut to place Devices 24" on-center	–	10
SR600V-C36	Cover - 31.5' Long Pre-Cut to place Devices 36" on-center	–	5


Thomas & Betts

T&B Surface Raceway Systems


Large Metallic Surface Raceway




SR700-EL




SR700-EL45




SR700-FL




SR700-FL45




SR700-IL



SR700-IL45



SR700-T



SR700 Series – Directional Fittings – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR700-EL	90° External Elbow For outside corners	1	20
SR700B-EL	90° External Elbow with barrier For surfaces at right angles	1	20
SR700-EL45	45° External Elbow For surfaces at 45° angles	1	20
SR700-FL	90° Flat Elbow For right angle turns on the same surface	1	20
SR700B-FL	90° Flat Elbow with barrier For right angle turns on the same surface	1	20
SR700-FL45	45° Flat Elbow For angled turns on the same surface	1	20
SR700-IL	90° Internal Elbow To make inside corners turn	1	20
SR700B-IL	90° Internal Elbow with barrier For surfaces at right angles	1	20
SR700-IL45	45° Internal Elbow For surfaces at 45° angles	1	20
SR700-T	Tee	1	20
SR700B-T	Divided Tee	1	20
SR700B-ELFO*	2" Radius External Elbow for SR700	1	10
SR700B-ILFO*	2" Radius Internal Elbow for SR700	1	10
SR700B-FLFO*	2" Radius Flat Elbow for SR700	1	10
SR700B-TFO*	2" Radius Divided Tee for SR700	1	10

NOTE: SR700B-T is supplied with internal crossovers and barriers to maintain separation of services.

*Made to order.




SR700B-ELFO



SR700B-ILFO



SR700B-FLFO




SR700B-TFO

T&B Surface Raceway Systems


Large Metallic Surface Raceway




SR700V-EL





SR700V-EL45




SR700V-FL




SR700V-FL45




SR700V-IL



SR700V-IL45



SR700V-T




SR700 Series – Directional Fittings – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR700V-EL	External Elbow To continue raceway run around external corner	1	20
SR700VB-EL	90° External Elbow with barrier Turns on outside corner	1	20
SR700V-EL45	45° External Elbow For surfaces at 45° angles	1	20
SR700V-FL	Flat Elbow 90° turn on flat surface	1	20
SR700VB-FL	90° Flat Elbow with barrier For right angle turns on the same surface	1	20
SR700V-FL45	45° Flat Elbow For angled turns on the same surface	1	20
SR700V-IL	Internal Elbow For inside corner turns	1	20
SR700VB-IL	90° Internal Elbow with barrier For raceway turns on inside corner	1	20
SR700V-IL45	45° Internal Elbow For surfaces at 45° angle	1	20
SR700V-T	Tee	1	20
SR700VB-T	Divided Tee	1	20
SR700VB-ELFO*	2" Radius External Elbow for SR700	1	10
SR700VB-ILFO*	2" Radius Internal Elbow for SR700	1	10
SR700VB-FLFO*	2" Radius Flat Elbow for SR700	1	10
SR700VB-TFO*	2" Radius Divided Tee for SR700	1	10

NOTE: SR700B-T is supplied with internal crossovers and barriers to maintain separation of services.

*Made to order.



SR700VB-ELFO



SR700VB-ILFO



SR700VB-FLFO




SR700VB-TFO

T&B Surface Raceway Systems


Large Metallic Surface Raceway




SR700-C




SR700-BF




SR700-EC




SR700-EF



SR700-PF



SR700-WR



SR700 Series – Fittings – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR700-C	Coupling	5	50
SR700-BF	Back Feed (1 1/8" grommets hole cuts to feed wire)	1	10
SR700-EC*	End Blank	5	100
SR700-EF*	End Feed	1	20
SR700-PF	Panel Flange	1	10
SR700-WR	Wire Retainer	10	100

SR700 Series – Fittings – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR700-C	Coupling	5	50
SR700V-BF	Back Feed (1 1/8" grommets hole cuts to feed wire)	1	12
SR700V-EC*	End Blank	5	100
SR700V-EF*	End Feed	1	20
SR700V-PF	Panel Flange	1	20

*NOTE: Knockouts are 1/2" and 3/4" concentric.

T&B Surface Raceway Systems

Large Metallic Surface Raceway



SR600VP-D



SR600VP-DC



SR600VP-DD



SR600VP-DT



SR600VP-DTT



SR600VP-G



SR600VP-GG

Standard Device Plates for SR-700 Surface Raceway – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600P-D	Single Duplex	1	20
SR600P-DC	Combination Duplex / 7/8" Grommeted Opening	1	20
SR600P-DD	Double Duplex	1	20
SR600P-DT	Single Duplex with Single Telephone Opening	1	20
SR600P-DTT	Single Duplex with Two Modular Jack Openings	1	20
SR600P-G	Single Decora Opening (GFCI)	1	20
SR600P-GG	Double Decora Opening (GFCI)	1	20
SR600P-SC	Combination Single Recep (1.40 dia.) / 7/8" Grommeted Opening	1	20
SR600P-HC	Combination Single Recep (1.59 dia.) / 7/8" Grommeted Opening	1	20
SR600P-L	Single Opening for Commercially Available Face Plates	1	20
SR600P-LL	Double Opening for Commercially Available Face Plates	1	20
SR600P-C	Single 7/8" Grommeted Opening	1	20
SR600P-B	Blank Plate for 600P Series	1	20

NOTE: 600P Series device plates used for SR600B, SR600, SR700B and SR700 series raceways.

Standard Device Plates for SR-700 Surface Raceway – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR600VP-D	Single Duplex	1	20
SR600VP-DC	Combination Duplex / 7/8" Grommeted Opening	1	20
SR600VP-DD	Double Duplex	1	20
SR600VP-DT	Single Duplex with Single Telephone Opening	1	20
SR600VP-DTT	Single Duplex with Two Modular Jack Openings	1	20
SR600VP-G	Single Decora Opening (GFCI)	1	20
SR600VP-GG	Double Decora Opening (GFCI)	1	20
SR600VP-SC	Combination Single Recep (1.40 dia.) / 7/8" Grommeted Opening	1	20
SR600VP-HC	Combination Single Recep (1.59 dia.) / 7/8" Grommeted Opening	1	20
SR600VP-L	Single Opening for Commercially Available Face Plates	1	20
SR600VP-LL	Double Opening for Commercially Available Face Plates	1	20
SR600VP-C	Single 7/8" Grommeted Opening	1	20
SR600VP-B	Blank Plate for 600P Series	1	20

NOTE: 600P Series device plates used for SR600B, SR600, SR700B and SR700 series raceways.



SR600VP-SC



SR600VP-L



SR600VP-C



SR600VP-HC



SR600VP-LL




SR600VP-B

NOTE: Custom plates available. See page 36.

Thomas & Betts

T&B Surface Raceway Systems

Large Metallic Surface Raceway

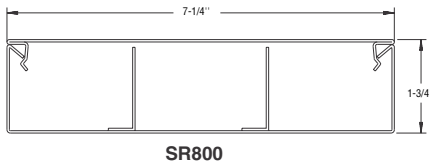

SR800 Series Raceway



The SR800 series is the industry's only triple compartment steel surface raceway. Used to separate power, voice and data cabling or to segregate "clean" from "dirty" power circuits for those specialized applications. Device plate configurations may be customized to your job specifications (refer to page 36 for holecut options.)

SR800 Series – Two-Piece Raceway – Gray


Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR800-BSE	Base - 10' Long Packed 2 per Carton	–	20 ft.
SR800-C5FT	Cover - 5' Long Packed 4 per Carton	–	20 ft.
SR800-C12	Cover - 7.5" Long Pre-Cut to place Devices 12" on center	–	10
SR800-C18	Cover - 13.5" Long Pre-Cut to Place Devices 18" on-center	–	10
SR800-C24	Cover - 19.5" Long Pre-Cut to place Devices 24" on-center	–	10
SR800-C36	Cover - 31.5" Long Pre-Cut to place Devices 36" on-center	–	5

SR800 Series – Two-Piece Raceway – Ivory


Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR800V-BSE	Base - 10' Long Packed 2 per Carton	–	20 ft.
SR800V-C5FT	Cover - 5' Long Packed 4 per Carton	–	20 ft.
SR800V-C12	Cover - 7.5" Long Pre-Cut to place Devices 12" on center	–	10
SR800V-C18	Cover - 13.5" Long Pre-Cut to Place Devices 18" on-center	–	10
SR800V-C24	Cover - 19.5" Long Pre-Cut to place Devices 24" on-center	–	10
SR800V-C36	Cover - 31.5" Long Pre-Cut to place Devices 36" on-center	–	5

T&B Surface Raceway Systems


Large Metallic Surface Raceway




SR800-FL




SR800-IL




SR800-EL



SR800-FL45



SR800-IL45



SR800-EL45


SR800 Series – Elbows and Tees – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR800-EL	90° External Elbow For surfaces at right angles	1	20
SR800-EL45	45° External Elbow For surfaces at 45° angles	1	20
SR800-FL	90° Flat Elbow For right angle turns on the same surface	1	20
SR800-FL45	45° Flat Elbow For angled turns on the same surface	1	20
SR800-IL	90° Internal Elbow For surfaces at right angles	1	20
SR800-IL45	45° Internal Elbow For surfaces at 45° angles	1	20
SR800-T	Tee	1	12

SR800 Series – Elbows and Tees – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR800V-EL	90° External Elbow For surfaces at right angles	1	20
SR800V-EL45	45° External Elbow For surfaces at 45° angles	1	20
SR800V-FL	90° Flat Elbow For right angle turns on the same surface	1	20
SR800V-FL45	45° Flat Elbow For angled turns on the same surface	1	20
SR800V-IL	90° Internal Elbow For surfaces at right angles	1	20
SR800V-IL45	45° Internal Elbow For surfaces at 45° angles	1	20
SR800V-T	Tee	1	20


NOTE: SR800-T is supplied with internal crossovers and barriers to maintain separation of services.




SR800-T

T&B Surface Raceway Systems


Large Metallic Surface Raceway




SR800-C




SR800-BF




SR800-EC



SR800-PF



SR800-EF



SR800-WR

SR800 Series – Fittings – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR800-BF	Back Feed (1 5/8" hole cut for feed wire)	1	12
SR800-C	Coupling	5	100
SR800-EC*	End Blank	5	100
SR800-EF*	End Feed	1	20
SR800-PF	Panel Flange	1	12
SR800-WR	Wire Retainer	10	200


SR800 Series – Fittings – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR800V-BF	Back Feed (1 5/8" hole cut for feed wire)	1	12
SR800V-C	Coupling	5	100
SR800V-EC*	End Blank	5	100
SR800V-EF*	End Feed	1	20
SR800V-PF	Panel Flange	10	200
SR800V-WR	Wire Retainer	10	200


*NOTE: Knockouts are 1/2" and 3/4" concentric

T&B Surface Raceway Systems


Large Metallic Surface Raceway




SR800P-DDD



SR800P-DTD



SR800P-GGG



SR800P-GTG

Standard Device Plates for Metallic Surface Raceway – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR800P-DDD	Triple Duplex	1	20
SR800P-DTD	Double Duplex with Single Telephone Opening	1	20
SR800P-GGG	Triple Decora (GFCI)	1	20
SR800P-GTG	Double Decora with Single Telephone Opening	1	20

Standard Device Plates for Metallic Surface Raceway – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR800VP-DDD	Triple Duplex	1	20
SR800VP-DTD	Double Duplex with Single Telephone Opening	1	20
SR800VP-GGG	Triple Decora (GFCI)	1	20
SR800VP-GTG	Double Decora with Single Telephone Opening	1	20

T&B Surface Raceway Systems


Large Metallic Surface Raceway

Custom Device Plates for SR500, SR600, SR700 and SR800 Raceway

Device plates may be custom ordered. Specify the type of device plate you need by adding the device letter code(s) after the raceway part number. See example shown below.


Legend ("X", "Y" and "Z" Options)

- D** = Duplex
- T** = Telephone (RJ45)
- S** = Single Receptacle (1.40" Diameter)
- H** = Single Receptacle (1.59" Diameter)
- G** = Decora Receptacle
- C** = 7/8" Grommetted hole for Communications
- B** = Blank
- L** = Rectangular opening for Devices (use with commercially available face plate - not supplied)
- W** = Single Switch Opening

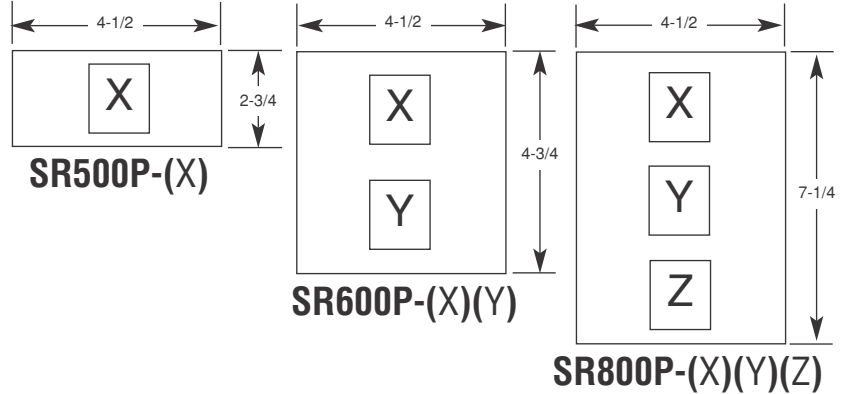

NOTES: Add "V" for ivory after three digit series number (ex. SR600VP-DC). SR600 Series device plates are used for SR600, SR600B, SR700 and SR700B Series Raceways.

Example

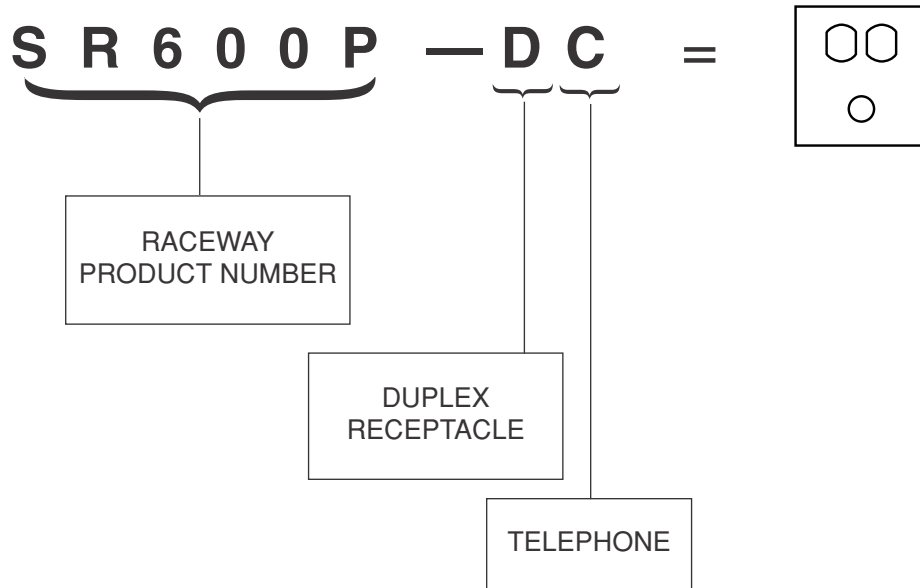

T&B Surface Raceway Systems

Nonmetallic Surface Raceway



T&B Single Channel Surface Raceway Systems

T&B Single Channel Surface Raceway Systems offer three separate styles for commercial and residential wiring applications. All feature snap-on covers for fast installation and all are available in white or ivory. Typical applications include wiring for track lighting, overhead lighting, and smoke detectors as well as to conceal telephone and lamp cords, stereo wires, and TV cables.

Standard Raceway – Series 10, Series 30


Standard raceway can be used in any circumstance recognized by the National Electrical Code (NEC) where a surface mounted wire management system is the preferred choice of installation. Available with a full complement of fittings.

Tapered Raceway – Series 80


Because of its sleek, aesthetically pleasing appearance, tapered raceway conforms easily to walls and non-uniform contours of buildings. It is available with a full complement of fittings and is recognized by the National Electrical Code.

Self-Adhesive Raceway


This adhesive-backed, low voltage raceway system installs quickly and easily — just peel off the protective outer liner and attach to a smooth, clean surface. This raceway is ideal for telephone, speaker, computer, data, coaxial, and fiber optic cable.



Series 10



Series 30



Series 80

E140971
E140972



Where noted by ►

Series 10 Single Channel Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
► RWM1-010	Series 10 raceway, white, 10 ft. lengths.	—	100
► RWMA1-010	Series 10 raceway with adhesive back, white, 10 ft. lengths.	—	100

Series 30 Single Channel Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
► RWM3-010	Series 30 raceway, white, 10 ft. lengths.	—	100
► RWMA3-010	Series 30 raceway with adhesive back, white, 10 ft. lengths.	—	100

Series 80 Single Channel Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
► RWM8-010	Series 80 raceway, white, 10 ft. lengths.	—	100
RWMA8-010	Series 80 raceway with adhesive back, white, 10 ft. lengths.	—	100



NOTE: T&B Single Channel Surface Raceway Systems are available in white only.

Thomas & Betts


T&B Surface Raceway Systems

Nonmetallic Surface Raceway


E140971
E140972




RWEI1




RWEE1




RWEF1




RWT1



RWES1



RWCP1




RWA1


Fittings for Series 10 Single Channel Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
RWEI1	Internal elbow	20	80
RWEE1	External elbow	20	80
RWEF1	Flat elbow	20	80
RWT1	Tee fitting	20	80
RWES1	End cap	20	80
RWCP1	Coupling	20	80
► RWA1*	Box adapter	25	100


*Required to connect Series 10 raceway to boxes and adapters.




RWEI3




RWEI3D




RWEE3




RWEF3




RWEF3D




RWT3




RWT3D




RWES3



RWCP3



RWA3



RWA3

Fittings for Series 30 Single Channel Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
RWEI3	Internal elbow	5	20
► RWEI3D	Internal elbow with 1" bend radius	10	200
RWEE3	External elbow	5	20
► RWEE3D	External elbow with 1" bend radius	10	100
RWEF3	Flat elbow	5	20
► RWEF3D	Flat elbow with 1" bend radius	10	200
RWT3	Tee fitting	5	20
► RWT3D	Tee fitting with 1" bend radius	10	120
RWES3	End cap	20	80
RWCP3	Coupling	10	40
► RWA3*	Box adapter	25	100

*Required to connect Series 30 raceway to boxes and adapters.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway


E140971
E140972

 **us** Where noted by ►
LISTED


Fittings for Series 80 Single Channel Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
RWEI8	Internal elbow	20	80
RWEE8	External elbow	20	80
RWEF8	Flat elbow	20	80
RWT8	Tee fitting	10	40
RWES8	End cap	20	80
RWCP8	Coupling	20	80
► RWA8*	Box adapter	20	100


*Required to connect Series 80 raceway to boxes and adapters.




RWEI8




RWEE8




RWEF8




RWT8



RWES8



RWCP8



RWA8

T&B Surface Raceway Systems

Nonmetallic Surface Raceway



LISTED
E140971

Where noted by •




LISTED
E140971
E140972


Where noted by ►




RWWB17
RWWB17C




RWWB19
RWWB19C



RWWB22
RWWB22C



RWWB53
RWWB53C



RWB50



RWC50



RWAC

Shallow Single Gang Wall Box for Single Channel Raceway*

Cat. No.	Length	Width	Depth	Std. Ctn.	Std. Pkg.
• RWWB17	4 $\frac{7}{8}$ "	3 $\frac{1}{8}$ "	1 $\frac{1}{2}$ "	5	50
► RWWB17C**	4 $\frac{7}{8}$ "	3 $\frac{1}{8}$ "	1 $\frac{1}{2}$ "	5	50

Medium Depth Single Gang Wall Box for Single Channel Raceway*

Cat. No.	Length	Width	Depth	Std. Ctn.	Std. Pkg.
• RWWB19	4 $\frac{7}{8}$ "	3 $\frac{1}{8}$ "	1 $\frac{5}{8}$ "	5	50
► RWWB19C**	4 $\frac{7}{8}$ "	3 $\frac{1}{8}$ "	1 $\frac{5}{8}$ "	5	50

Deep Single Gang Wall Box for Single Channel Raceway*

Cat. No.	Length	Width	Depth	Std. Ctn.	Std. Pkg.
• RWWB22	4 $\frac{7}{8}$ "	3 $\frac{1}{8}$ "	1 $\frac{7}{8}$ "	5	50
► RWWB22C**	4 $\frac{7}{8}$ "	3 $\frac{1}{8}$ "	1 $\frac{7}{8}$ "	5	50

Deep Two Gang Wall Box for Single Channel Raceway*

Cat. No.	Length	Width	Depth	Std. Ctn.	Std. Pkg.
• RWWB53	4 $\frac{7}{8}$ "	3 $\frac{1}{8}$ "	2 $\frac{1}{8}$ "	4	20
► RWWB53C**	4 $\frac{7}{8}$ "	3 $\frac{1}{8}$ "	2 $\frac{1}{8}$ "	4	20

Round Fixture Box for Single Channel Raceway*

Cat. No.	Description	Diameter	Depth	Std. Ctn.	Std. Pkg.
• RWB50	Base & Lid	5 $\frac{1}{2}$ "	1 $\frac{1}{8}$ "	8	40
• RWC50	Cover	4 $\frac{3}{4}$ "	$\frac{1}{4}$ "	1	20

Conduit Adapter/Drop Ceiling Fitting for Single Channel Raceway*

Cat. No.	Description	Std. Ctn.	Std. Pkg.
► RWAC	Conduit Adapter, can be used with drop ceilings.	4	40

* Boxes and conduit adapter require a box adapter (RWA series, page 39-40) to connect to single channel raceways.

** For Canada - grounding lug pre-installed.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway



T&B Premier™ Multi-Channel Surface Raceway

With its slip-in, slip-out divider walls, T&B Premier™ moveable wall, multi-channel surface raceway gives you unmatched on-the-job flexibility for routing voice, data, and power wiring as well as fiber optic and coaxial cable. Unlike competitive products with breakaway dividers, you can even add channels later if your wiring needs change, and its slip-in, slip-out walls are much stronger, neater, and easier to work with. Other features include:

- A unique cable retainer that pivots out to form a tray for holding wire and cable out of the way to make installation easier.
- The flexibility to place integral jacks wherever you want them by simply punching the raceway cover.
- Ten-foot lengths that reduce the number of joints for a smoother installation while also reducing job cycle time.
- Compatibility with single channel systems for wall drop applications.
- A single rigid cover diffuses light for a softer look.
- A high-quality paintable finish complements any décor.
- A blue film protects the cover throughout installation.




Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway




Where noted by ►

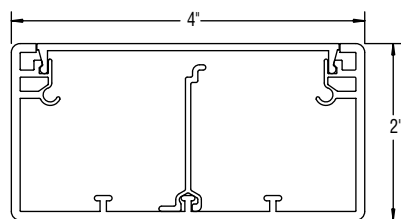

Premier

Premier™ Multi-Channel Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
5RWMB-010	Premier raceway base, cover, and divider, white, 10 ft. lengths.	—	20

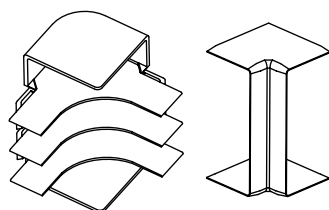


5RWEID

Fittings for Premier™ Multi-Channel Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
5RWEID	Internal Elbow with 1¼" bend radius	1	6
5RWEED	External Elbow with 1¼" bend radius	1	4
5RWEFD	Flat Elbow with 1¼" bend radius	1	4
5RWTD	Tee Fitting with 1¼" bend radius	1	8
5RWECE	End Cap	10	100
5RWEFE	Entrance End Fitting	1	10




5RWECE




5RWEFE

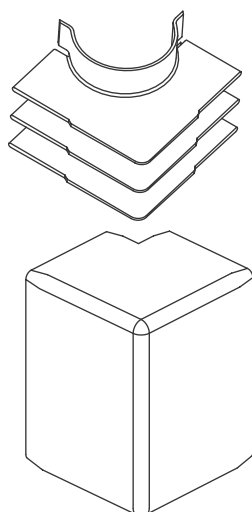

5RWEED

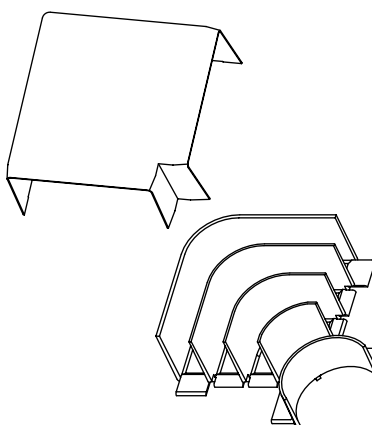

5RWEFD

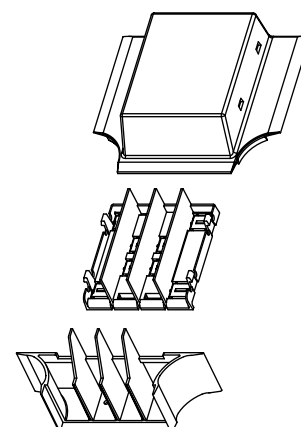

5RWTD

NOTE: T&B Premier™ multi-channel surface raceway is available in white only.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway





Where noted by ►



Accessories for Premier™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
5RWCSF	Joint cover - hides base and cover seams	4	60
5RWWBCP	Internal coupler	8	120
5RRF	Wire retainer	15	225
5RWA*	Single channel adapter - connects single channel raceways to Premier™	10	400
5RWDT-010	Divider - 10 ft. lengths	—	100

* Requires a box adapter (RWA series, page 39-40) to connect single channel raceway to Premier™ raceway.

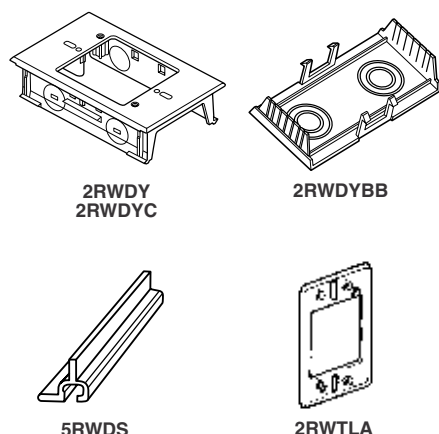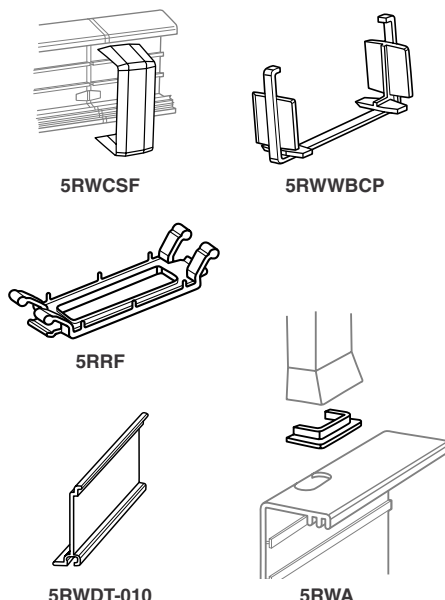

Device Yoke for Premier™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWDY	Device yoke for mounting devices and faceplates, 5½" x 5½"	2	20
2RWDYCY	Device yoke with ground lug preinstalled for Canada, 5½" x 5½"	2	20
2RWDYBB	Box base - attaches to device yoke for voltage separation, 5½" x 5½"	2	8
5RWDS	Underbox divider (length = 5¼"), used under box base (2RWDYBB)	10	450
2RWTLA*	Transition lid adapter	5	20

NOTE: When both power and communications services are installed in Premier™ raceway, the box base (2RWDYBB) and the underbox divider (5RWDS) must be used with device yoke (2RWDY) to maintain voltage separation at device locations.

* Mounts to the device yoke (2RWDY) and accepts the top half of the RWWB Series single gang wall boxes. Provides additional space for deep electrical devices and allows larger bend radii for network wiring.

NOTE: T&B Premier™ multi-channel surface raceway is available in white only.


Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway



Where noted by ►

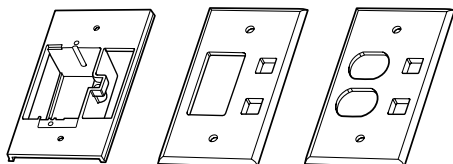


2RWDDK
2RWDDKC

Dual Device Kit for Premier™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWDDK	Dual device yoke, duplex cover plate, and GFCI cover plate	1	10
2RWDDKC	Dual Device Kit with ground lug preinstalled for Canada	1	10

Basic Installation Steps For Dual Device Kit

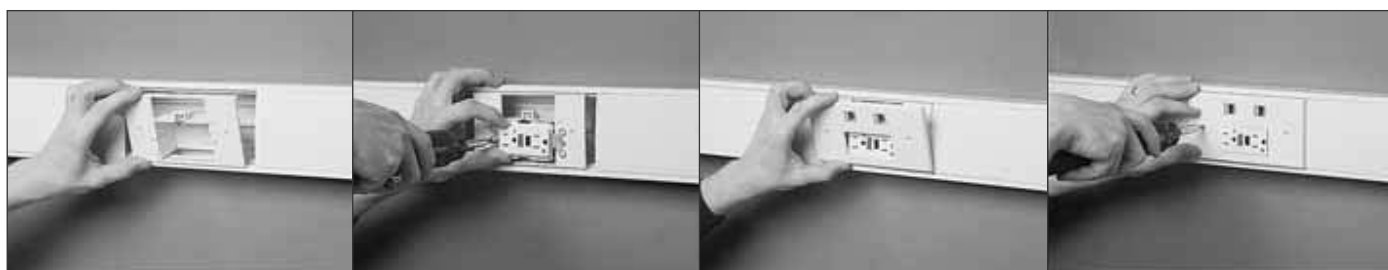

1. Snap in the Dual Device Yoke at the desired location.
2. Wire, then install any standard NEMA device.
3. Terminate wires into datacom connectors, then snap into the coverplate.
4. Secure the coverplate in place for a clean, professionally finished job.

NOTE: Installation photos show Dual Device Kit being inserted into T&B Premier™ surface raceway. The Dual Device Kit is compatible with both T&B Premier™ and T&B Prestige™ multi-channel raceway.

NOTE: T&B Premier™ multi-channel surface raceway is available in white only.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

T&B Prestige™ Multi-Channel Raceway Systems

T&B Prestige™ multi-channel raceway systems offer the industry's most comprehensive range of raceway profiles, boxes, and fittings to give you the flexibility to meet all multi-channel wiring requirements. A unique concept in multi-channel design, these systems use a precision extruded three-channel base along with snap-fit compartment covers in three shapes to offer six different system profiles. These separate multi-channel covers permit power and data installation at separate times during the project. This flexibility allows you to design your raceway system to better meet your specific project requirements. In addition, your system can be easily expanded 50% wider and the style changed as desired.



Used with permission by Case Systems,* Inc.


*Case Systems is a registered trademark of Case Systems, Inc.

Thomas & Betts


T&B Surface Raceway Systems

Nonmetallic Surface Raceway

UL
LISTED
E140971
E140972

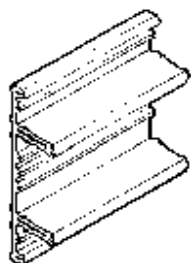


2RWMB-010




2RWMBE-010

Prestige™ Multi-Channel Surface Raceway Base

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWMB-010	Main base, white, 10 ft. lengths	-	20
2RWMBE-010	Main base extension, white, 10 ft. lengths	-	40




2RWCF-010




2RWCS-010

Covers for Prestige™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWCF-010	Flat cover, white, 10 ft. lengths	-	40
2RWCS-010	Square cover, white, 10 ft. lengths	-	40
2RWCC-010	Chamfered cover, white, 10 ft. lengths	-	40



2RWCC-010



2RWCSF



2RWCSS

Cover Seals for Prestige™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWCSF	Cover seal for flat cover	10	40
2RWCSS	Cover seal for square cover	10	40
2RWCS	Cover seal for chamfered cover	10	40
2RWCE	Cover seal for flat cover & main base extension	10	40



2RWCS



2RWCE

NOTE: T&B Prestige™ multi-channel surface raceway is available in white only.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway




Series 120 Raceway – Nominal Dimensions – 6¾" x 2" Actual Dimensions – 171.5 x 50.8 mm

Quantity Required	Cat. No. White	Description
1	2RWMB-010	Main Base
1	2RWCC-010	Chamfered Cover
1	2RWCF-010	Flat Cover
1	2RWCS-010	Square Cover




Series 130 Raceway – Nominal Dimensions – 6¾" x 2" Actual Dimensions – 169.6 x 50.2 mm

Quantity Required	Cat. No. White	Description
1	2RWMB-010	Main Base
1	2RWCF-010	Flat Cover
2	2RWCS-010	Square Cover




Series 140 Raceway – Nominal Dimensions – 6¾" x 2" Actual Dimensions – 171.5 x 50.8 mm

Quantity Required	Cat. No. White	Description
1	2RWMB-010	Main Base
2	2RWCC-010	Chamfered Cover
1	2RWCF-010	Flat Cover




Series 160 Raceway – Nominal Dimensions – 8¾" x 2" Actual Dimensions – 212.7 x 50.8 mm

Quantity Required	Cat. No. White	Description
1	2RWMB-010	Main Base
1	2RWMBE-010	Main Base Extension
2	2RWCF-010	Flat Cover
1	2RWCC-010	Chamfered Cover



Series 170 Raceway† – Nominal Dimensions – 8¾" x 2" Actual Dimensions – 212.5 x 50.8 mm

Quantity Required	Cat. No. White	Description
1	2RWMB-010	Main Base
1	2RWMBE-010	Main Base Extension
2	2RWCF-010	Flat Cover
1	2RWCS-010	Square Cover



Series 190 Raceway – Nominal Dimensions – 10" x 2" Actual Dimensions – 254 x 50.8 mm

Quantity Required	Cat. No. White	Description
1	2RWMB-010	Main Base
2	2RWMBE-010	Main Base Extension
3	2RWCF-010	Flat Cover

NOTE: T&B Prestige™ multi-channel surface raceway is available in white only.

†=Make-to-order Series









Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway



Fittings for Prestige™ Multi-Channel Surface Raceway

		Series 120	Series 130	Series 140*	Series 160*	Series 170*	Series 190*
	End Caps – Right & Left Hand Pairs	2RWEC12	2RWEC13	2RWEC14 2RWECL14 (Long)	2RWEC16	2RWEC17	2RWEC19
	Elbow – Internal	2RWEI12	2RWEI13	2RWEI14	2RWEI16	2RWEI17	2RWEI19
	Elbow – External	2RWEE12	2RWEE13	2RWEE14	2RWEE16	2RWEE17	2RWEE19
	Elbow Flat	2RWEF2D (Down)	2RWEF3	2RWEF4	2RWEF6D (Down)	2RWEF7D (Down)	2RWEF9
	Elbow Flat	2RWEF2U (Up)	N/A	N/A	2RWEF6U (Up)	2RWEF7U (Up)	N/A
	Flat Tee	2RWT23 120 TO 130	2RWT33 130 TO 130	2RWT44 140 TO 140	2RWT64 160 TO 140	2RWT73 170 TO 130	2RWT99 190 TO 190
	Flat Tee	2RWT24 120 TO 140	2RWT23 120 TO 130	2RWT24 120 TO 140	2RWT69 160 TO 190	2RWT79 170 TO 190	2RWT69 160 TO 190
	Flat Tee	N/A	2RWT73 170 TO 130	2RWT64 160 TO 140	N/A	N/A	2RWT79 170 TO 190

NOTE: Line drawings do not represent all part numbers. Series 120 parts shown here.

* Made-to-order fittings.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway




2RRF




2RRS



2RRC



2RWAS



2RWAC

Wire Retainers for Prestige™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RRF	Wire retainer for use under flat cover (2RWCF-010)	10	40
2RRS	Wire retainer for use under square cover (2RWCS-010)	10	40
2RRC	Wire retainer for use under chamfered cover (2RWCC-010)	10	40

Single Channel Adapters for Prestige™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWAS	Square cover adapter – connects single channel raceway to Prestige™	10	40
2RWAC	Chamfered cover adapter – connects single channel raceway to Prestige™	10	40

NOTE: Adapters require a box adapter (RWA series, page 39-40) to connect single channel raceway to Prestige™ raceway



2RWMBCP



2RWDS-050



2RWBRG

Accessories for Prestige™ Multi-Channel Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWMBCP	Coupling for main base (2RWMB-010)	5	50
2RWDS-050	Divider support, 10 ft. lengths	-	50
2RWBRG	Cross-over bridge to route wires between outside channels	10	40

NOTE: T&B Prestige™ multi-channel surface raceway is available in white only.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway



2RWDY
2RWDYC



2RWDYBB






2RWTLA

Device Yoke for Prestige™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWDY	Device yoke for mounting devices and faceplates	2	20
2RWDYC	Device yoke with ground lug preinstalled for Canada	2	20
2RWDYBB	Box base - attaches to device yoke	2	8
2RWTLA*	Transition lid adapter	5	50

NOTE: When both power and communications services are present in the same channel of Prestige™ raceway, the box base (2RWDYBB) must be used with device yoke (2RWDY) to maintain separation at the device location.

* Mounts to the device yoke (2RWDY) and accepts the top half of single gang wall boxes (RWWB series, page 41). Provides additional space for deep electrical devices and allows larger bend radii for network wiring.



2RWDDK
2RWDDKC

Dual Device Kit for Prestige™ Multi-Channel Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
2RWDDK	Dual device yoke, duplex cover plate, and GFCI cover plate	1	10
2RWDDKC	Dual Device Kit with ground lug preinstalled for Canada	1	10

NOTE: See page 45 for installation procedures.

NOTE: T&B Prestige™ multi-channel surface raceway is available in white only.

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

T&B Cove Molding Raceway

T&B cove molding raceway combines the convenient features of a surface wiring installation within a building's natural contours. Available in both single channel and multi-channel configurations, this raceway is virtually unnoticeable when installed.

T&B Multi-Channel
Cove Molding Raceway


T&B Single
Channel Cove
Molding Raceway

Thomas & Betts


T&B Surface Raceway Systems

Nonmetallic Surface Raceway

UL **US** Where noted by ►
LISTED
E140971
E140972



Series 90

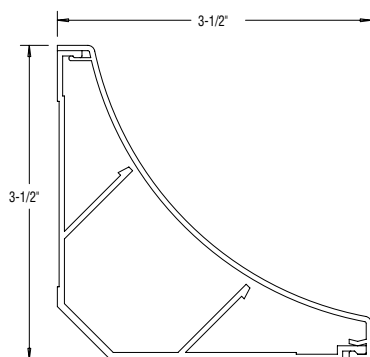


Series 900

Series 90 Single Channel Cove Molding Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
► RWC9-010	Series 90 cove molding raceway, white, 10 ft. lengths	—	100

Series 900 Multi-Channel Cove Molding Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
► 2RWC90-010	Series 900 cove molding raceway, white, 10 ft. lengths	—	20




RWEE9




RWEI9




RWX9



RWES9



RWS9




RWCP9

Fittings for Series 90 Single Channel Cove Molding Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
RWEE9	External elbow	10	40
RWEI9	Internal elbow	10	40
RWX9	Three-way corner fitting - for vertical drops in a corner	10	40
► RWES9	End cap	10	40
► RWS9	Wire retainer	25	100
RWCP9	Cover seam clip - hides seams	10	40
► RWA9*	Adapter - connects single channel raceway to Series 90 cove molding	10	40

* Requires a box adapter (RWA series, page 39-40) to connect single channel raceway to Series 90 cove molding.





RWA9

NOTE: T&B Cove Molding Raceway is available in white only.


Thomas & Betts

T&B Surface Raceway Systems


Nonmetallic Surface Raceway




2RWEE90




2RWEI90




2RWEC90



2RWCS90



2RWCP90



2RWA90

Fittings for Series 900 Multi-Channel Cove Molding Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
▶ 2RWEE90	External elbow	2	20
▶ 2RWEI90	Internal elbow	2	20
▶ 2RWEC90	End cap	10	40
▶ 2RWCS90	Wire retainer	10	40
▶ 2RWCP90	Cover seam clip - hides seams	10	40
▶ 2RWA90*	Adapter - connects single channel raceway to Series 90 cove molding	5	20

* Requires a box adapter (RWA series, page 39-40) to connect single channel raceway to Series 900 cove molding

NOTE: T&B Cove Molding Raceway is available in white only.

T&B Surface Raceway Systems


Nonmetallic Surface Raceway




One-Piece Latching Raceway




Two-Piece Raceway




SR50-LD



SR50-TP



SR100-LD



SR100-TP

One-Piece Latching Raceway and Two-Piece Raceway Systems

T&B offers a quality, low cost, one-piece latching raceway to speed the installation of low voltage cable runs. Engineered with a flexible "living" hinge, the latching system can be opened and closed repeatedly without cracking in order to accommodate frequent wiring changes. The system also features an innovative reinforcing arm, which assures a positive lock and prevents accidental opening at impact.

T&B also offers a unique two-piece raceway system with a separate cover that completely covers the base for clean aesthetics and tamper resistance.

Both the latching raceway and the two-piece raceway systems feature a high performance adhesive backing that eliminates the costly drilling of holes for mechanical fasteners in low voltage applications. The raceways are also UL listed for power applications up to 600V when mechanically fastened every 8" with a #8 screw. Made of UL listed 94V-0 PVC, T&B nonmetallic surface raceway systems are self-extinguishing and engineered to resist heat, impact, moisture, and most organic solvents. Additionally, the systems meet the requirements of Article 388 of the National Electric Code.

The off white color of the raceway systems will coordinate with any décor. For a custom look, it can be painted with a latex based paint (see Paint Specification, page 101).

SR50 Series Latching Raceway and Two-Piece Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR50-LD	One-piece latching duct, off white, 6 ft. lengths	—	120
SR50-TP	Two-piece raceway, off white, 6 ft. lengths	—	120

SR100 Series Latching Raceway and Two-Piece Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR100-LD	One-piece latching duct, off white, 6 ft. lengths	—	144
SR100-TP	Two-piece raceway, off white, 6 ft. lengths	—	144

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

Accessory Fittings For One-Piece Latching Raceway and Two-Piece Nonmetallic Surface Raceway Systems

T&B Accessory Fittings are designed for the finished look in your raceway installations. Fitting covers overlap raceway edges for a smooth appearance. They slide into the unique center channel of the base to provide the proper alignment around splices, corners, and tees. These connectors are one more indication of the quality engineering reflected in the T&B system.



Fittings for SR50 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR50-CF	Drop Ceiling Fitting	10	200
SR50-EC	End Cap: Finishes Raceway section at end of run.	10	250
SR50-EL	External Corner and Connector: Dresses outside corners.	10	200
SR50-FL	Flat Elbow Cover and Connector: Dresses 90° corners.	10	200
SR50-IL	Internal Corner and Connector: Dresses inside corners.	10	200
SR50-SC	Splice Cover and Connector: Joins two linear raceway sections for a uniform appearance.	10	250
SR50-T	Tee Cover and Connector: For perpendicular wire runs.	10	200
SR50-WR	Wire Retainer: Holds wire in base before the cover is attached. (For Two-Piece System only.)	10	1000




Fittings for SR100 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR100-BA	Outlet Box Adapter	10	50
SR100-CF	Drop Ceiling Fitting	10	250
SR100-CT	Center Track (Partition)	—	144 ft.
SR100-EC	End Cap: Finishes Raceway section at end of run.	10	200
SR100-EL	External Corner and Connector: Dresses outside corners.	10	250
SR100-FL	Flat Elbow Cover and Connector: Dresses 90° corners.	10	300
SR100-GC	Conduit Connector	10	150
SR100-IL	Internal Corner and Connector: Dresses inside corners.	10	150
SR100-RC	Reducer Cap: Joins the 1" and ½" systems together for linear wire runs.	10	200
SR100-SC	Splice Cover and Connector: Joins two linear raceway sections for a uniform appearance.	10	300
SR100-T	Tee Cover and Connector: For perpendicular wire runs.	10	150
SR100-TR	Tee Cover with Reducer and Connector: Joins the 1" and ½" Raceway Systems together for perpendicular wire runs.	10	120
SR100-WR	Wire Retainer: Holds wire in base before the cover is attached. (For Two-Piece System only.)	10	1000




SR100-BA




SR100-CF & SR50-CF




SR100-EC & SR50-EC




SR100-EL & SR50-EL





SR100-FL & SR50-FL




SR100-IL




SR100-SC & SR50-SC




SR100-T & SR50-T



SR100-RC



SR100-WR



SR100-WR & SR50-WR

NOTE: T&B SR50 Series and SR100 Series Surface Raceway are only available in off white.

Thomas & Betts

T&B Surface Raceway Systems


Nonmetallic Surface Raceway

Radius Raceway Fittings

Engineered to maintain the recommended minimum bend radius for Category 5e and fiber optic cables.

These Category 5e compliant fittings exceed the industry requirement of a minimum 1 inch bend radius. The complete line of fittings provide a 1.5 inch bend radius.

The radius fittings use an internal base section ensuring continuous cable protection, providing for both fast and easy installation. Designed for use with SR100-TP and SR100-LD systems only.

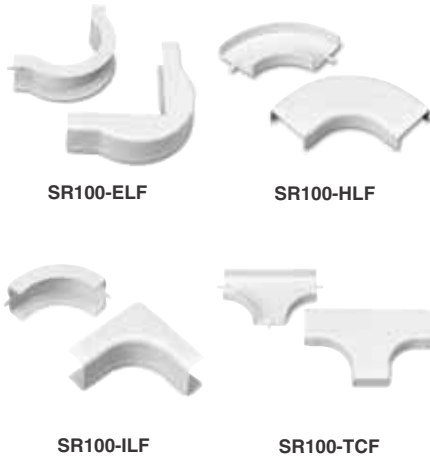

Radius Fittings for SR100 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR100-ELF	External Elbow Base and Cover – Category 5e Compliant	10	100
SR100-HLF	Flat Elbow Cover and Base – Category 5e Compliant	10	100
SR100-ILF	Internal Elbow Base and Cover – Category 5e Compliant	10	100
SR100-TCF	Tee Cover and Base – Category 5e Compliant	10	100



Junction Boxes for SR50 and SR100 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
SRJB-1	Single Gang 3" W x 5" L x 1" D	1	80
SRJB-1 1/2	Single Gang 3" W x 5" L x 1.6" D	1	75
SRJB-2	Single Gang 3" W x 5" L x 2" D	1	50
SRJB-1R	Single Gang Round 5.78 Dia. x 1.13" D	1	50
SRJB-2G-2	Two Gang 5" W x 5" L x 2" D	1	30

All Accessory Fittings are made of UL Listed 94V-0 Material.

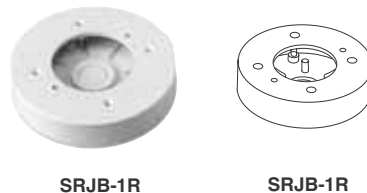

- Concentric twist-outs for attaching to both the SR50 and SR100 raceways.
- Mount a variety of NEMA devices and Omni-Plus™ matching off white datacom faceplates and data jacks connectors.
- Ideal for security and fire alarm hardware.

NOTE: T&B SR50 Series and SR100 Series Surface Raceway are only available in off white.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway




NM600 Series



The NM600 Series large, Nonmetallic Surface Raceway System is designed to meet a range of power and data distribution needs. The labor saving two-compartment system ensures easy installations, moves and upgrades.

The large nonmetallic raceway, featuring rounded corners that prevent dust accumulation, is easy to cut and mounts quickly to any surface. A one-cover option offers a seamless appearance, while a two-cover version enables convenient access to both compartments for multiple installers. Each component is the width of a single-gang face plate, which makes the system interchangeable with Omni-Plus™ datacom plates and all other standard face plates.


Made of rugged, flame-resistant PVC, the system includes fittings designed for radius bends to accommodate Category 6 and fiber optic cable.

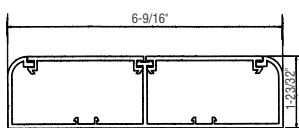


NM600




NM600-BSE

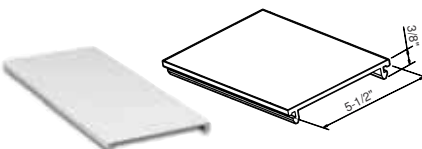


NM600-C8FT

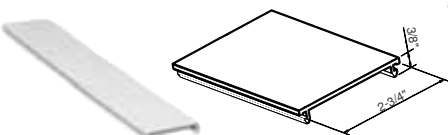

NM600-TC8FT

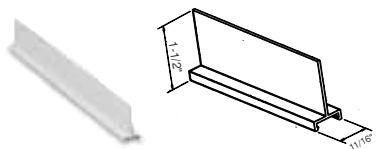

NM600-D

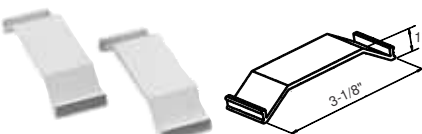

NM600-TWR

Raceway Base for NM600 Series Surface Raceway

Cat. No.	Description	Length	Std. Ctn.	Std. Pkg.
NM600-BSE	Extruded in-place divider provides two equal channels, for separate power and low voltage services. Snap-in ridges in each compartment permit the field installation of the NM600D divider.	8'	—	48 ft.

Raceway Cover for NM600 Series Surface Raceway

Cat. No.	Description	Length	Std. Ctn.	Std. Pkg.
NM600-C8FT	Covers both channels of raceway base providing a seamless appearance.	8'	—	48 ft.
NM600-TC8FT	Single channel cover enables access to each compartment without disturbing the other.	8'	—	96 ft.

Divider for NM600 Series Surface Raceway

Cat. No.	Description	Length	Std. Ctn.	Std. Pkg.
NM600-D	May be field installed to separate each channel in half.	8'	—	96 ft.

Wire Retainer for NM600 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-TWR	Holds power conductors or data cables in place. Fits single channel.	—	20

NOTE: T&B NM600 Series Surface Raceway is only available in off white.

Thomas & Betts

T&B Surface Raceway Systems


Nonmetallic Surface Raceway

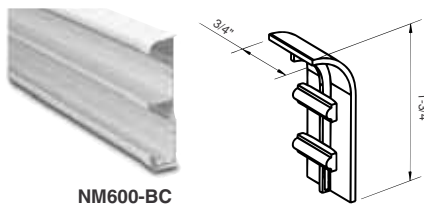

NM600-BC

Base Seam Clip for NM600 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-BC	Covers uneven seams in sidewalls of raceway base section.	—	10

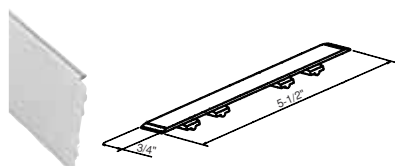

NM600-SC

Splice Cover for NM600 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-SC	Fits full one-piece NM600C8FT cover.	—	10

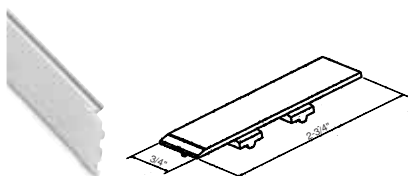

NM600-TSC

Twin Splice Cover for NM600 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-TSC	Covers gap in single channel NM600-TC8FT cover.	—	10

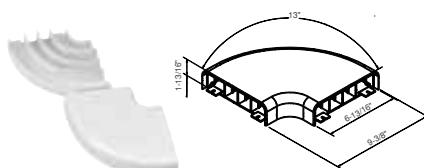

NM600-FL

Flat Elbow for NM600 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-FL	For right angle turns on same surface. Has 3 dividers that maintain 1½" bend radius for Cat. 5e/fiber optic cables.	—	1

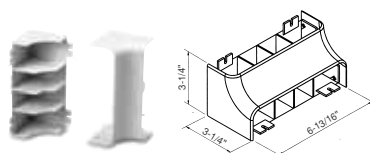

NM600-IL

Internal Elbow for NM600 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-IL	For 90° inside corners. 1½" bend radius.	—	1

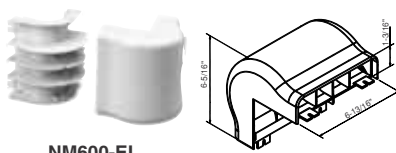

NM600-EL

External Elbow for NM600 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-EL	For 90° outside corners. Has 3 dividers molded in place should optional NM600D divider be used. 1½" bend radius.	—	1

NOTE: T&B NM600 Series Surface Raceway is only available in off white.

Thomas & Betts

T&B Surface Raceway Systems


Nonmetallic Surface Raceway

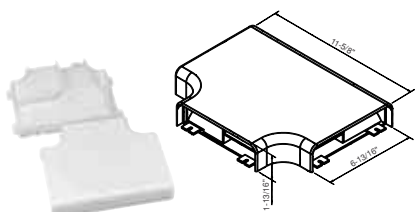

NM600-T

Tee/Divided Tee for NM600 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-T	Comes with optional snap-in cross-over to maintain separation of services	—	1

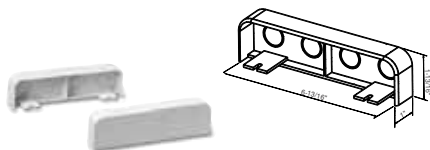

NM600-EC

End Cap for NM600 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-EC	Closes end of raceway section. Has 4 concentric 1/2" and 3/4" K.O.s.	—	10

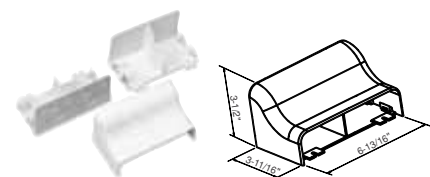

NM600-EF

Entrance End Feed for NM600 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-EF	For feeding raceway with conduit. Has (4) 1/2" trade size K.O.s and (2) concentric 3/4", 1" and 1 1/4" K.O.s.	—	1

NOTE: T&B NM600 Series Surface Raceway is only available in off white.


Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway



NM600-DB




Device Bracket for NM600 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600-DB	For mounting standard single-gang devices and faceplates.	—	5



NM600P-B




Blank Device Plate for NM600 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600P-B	Blank Cover	—	10



NM600P-D




Duplex Device Plate for NM600 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600P-D	Duplex Receptacle Cover	—	10



NM600P-G




Rectangular Device Plate for NM600 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600P-G	For mounting GFCI or decorative style devices.	—	10



NM600P-HC




Single Receptacle Cover for NM600 Series Surface Raceway


Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600P-HC	For mounting twist-lock devices with 1.60" diameter.	—	10
NM600P-SC	For mounting 1.42" diameter twist-lock devices.	—	10



NM600P-SC



NM600P-SW



Switch Cover for NM600 Series Surface Raceway

Cat. No.	Description	Std. Ctn.	Std. Pkg.
NM600P-SW	Single-gang switch plate	—	10

NOTE: T&B NM600 Series Surface Raceway is only available in off white.


Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

Cord Protection



Need to hide extension cords or communications wiring? T&B offers both on-floor and wall-mount cord protection to improve the aesthetics and safety of your office.

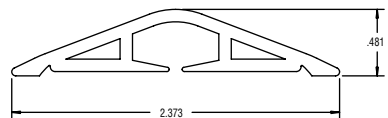

On-Floor Cord Protection

- Hides cords and prevents tripping.
- Made of flexible PVC for durability.
- Cross sectional area of center compartment = 0.175 sq. in.

Cat. No.	Description	Std. Ctn.	Std. Pkg.
CPB15M	Cord Protector, beige, 15 ft. roll	—	1

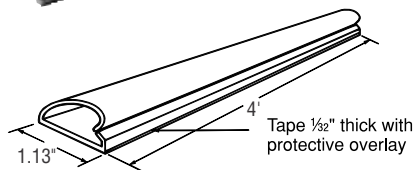

Wall-Mount Cord Protection

- Adhesive backing facilitates quick, easy mounting.
- Can be painted any color with a latex paint to match existing décor (see paint specification, page 101).
- Maximum wire bundle diameter = 1/2".

Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR50-OP	One-piece duct with adhesive back, gray, 4 ft. lengths	—	40

T&B Surface Raceway Systems

Multi-Outlet Systems – Two-Piece




Multi-Outlet Strips

- Attractive ivory and gray baked enamel finish for a long lasting appearance.
- Standard lengths of 3', 5' and 6' with outlet spacings on 6", 9", 12" and 18" centerline distances.
- 15A, 120V wired receptacle harness with #12 awg solid conductors.
- NEMA5-15R grounded outlets.
- Available in single and dual circuits, with outlets alternatively wired, and isolated ground versions (orange molded receptacles for strict municipal codes.)
- Two (2) blank end fittings and one (1) coupler included with each outlet strip.

Single Circuit Multi-Outlet Assemblies*

Cat. No.	Length	Outlet Spacing	# of Outlets	# of Circuits	Std. Ctn.	Std. Pkg.
SC306G	3'	6"	6	Single	—	10
SC306V	3'	6"	6	Single	—	10
SC506G	5'	6"	10	Single	—	10
SC506V	5'	6"	10	Single	—	10
SC512G	5'	12"	5	Single	—	10
SC512V	5'	12"	5	Single	—	10
SC606G	6'	6"	12	Single	—	10
SC606V	6'	6"	12	Single	—	10
SC609G	6'	9"	8	Single	—	10
SC609V	6'	9"	8	Single	—	10
SC612G	6'	12"	6	Single	—	10
SC612V	6'	12"	6	Single	—	10
SC618G	6'	18"	4	Single	—	10
SC618V	6'	18"	4	Single	—	10



SC/DC Series

Dual Circuit Multi-Outlet Assemblies*

Cat. No.	Length	Outlet Spacing	# of Outlets	# of Circuits	Std. Ctn.	Std. Pkg.
DC512G	5'	12"	5	Two	—	2
DC512V	5'	12"	5	Two	—	2
DC609G	6'	9"	8	Two	—	2
DC609V	6'	9"	8	Two	—	2
DC612G	6'	12"	6	Two	—	2
DC612V	6'	12"	6	Two	—	2
DC618G	6'	18"	4	Two	—	2
DC618V	6'	18"	4	Two	—	2

Isolated Ground Multi-Outlet Assemblies*

Cat. No.	Length	Outlet Spacing	# of Outlets	# of Circuits	Std. Ctn.	Std. Pkg.
SCIG306G	3'	6"	6	Single	—	2
SCIG306V	3'	6"	6	Single	—	2
SCIG512G	5'	12"	5	Single	—	2
SCIG512V	5'	12"	5	Single	—	2
SCIG606G	6'	6"	12	Single	—	2
SCIG606V	6'	6"	12	Single	—	2
SCIG612G	6'	12"	6	Single	—	2
SCIG612V	6'	12"	6	Single	—	2
SCIG618G	6'	18"	4	Single	—	2
SCIG618V	6'	18"	4	Single	—	2

* "G" suffix = gray, "V" = ivory

Thomas & Betts

T&B Surface Raceway Systems


Multi-Outlet Systems – Two-Piece



Cord-ended Outlet Strips – Ivory

Cat. No.	Length	Outlet Spacing	# of Outlets	Comb. On/Off switch & circuit breaker	Std. Ctn.	Std. Pkg.
SR250V-3	3'	6"	6	Yes	–	4
SR250V-4	4'	6"	8	Yes	–	4
SR250V-5	5'	6"	10	Yes	–	4
SR250V-6	6'	6"	12	Yes	–	4

- 3', 4' and 6' strips place power outlets where they're needed most.
- The four-foot (4') unit is ideal for bringing power to retail displays.
- Integrated power switch/circuit breaker combination.
- Rugged 6-foot SJTW molded cord-set.
- Two (2) color matched wall-mount brackets included.
- Meets all UL/CSA safety requirements.

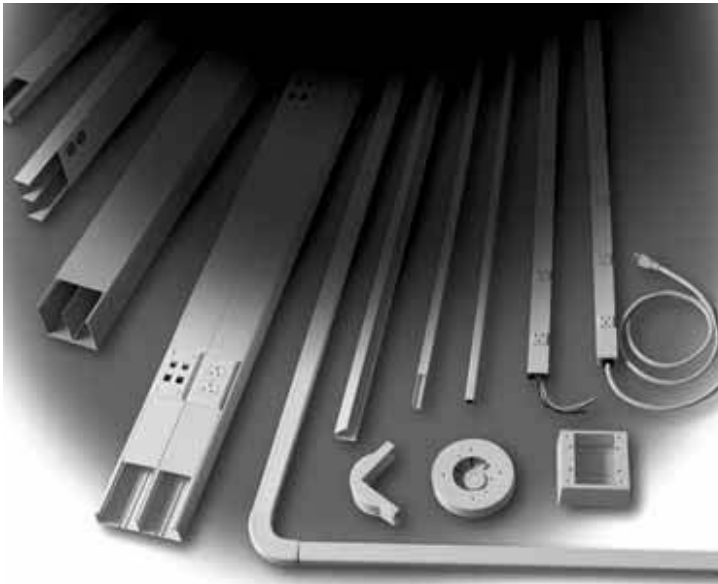

Single-source convenience for every connectivity application!

Reconfiguring electrical wiring and communications networks for building retrofits or additions? Specify Thomas & Betts Surface Raceway Systems to get the flexibility, functionality and compatibility you need for every connectivity application.

Our comprehensive line of wire management solutions includes metallic, non-metallic, and aluminum surface raceways, power poles, in-floor and undercarpet systems, and complete structured cabling systems. Custom-engineered systems available.

For integrated connectivity, ease of installation, and the convenience of single-source purchasing and support, see your Thomas & Betts distributor. Or for Technical Services, call 888-862-3289.



Decorative Cove Molding Raceway, ideal for executive offices and conference rooms.



3-channel metal raceway. A Thomas & Betts exclusive!

Thomas & Betts

T&B Surface Raceway Systems

Multi-Outlet Systems – Two-Piece

SR250 Raceway Accessories

T&B Two-Piece Multi-Outlet Systems are based on the SR250 Series Surface Raceway. SR250 Series Raceway and Fittings can be used along with the Two-Piece Multi-Outlet Strips.

SR250 Series – Two-Piece Raceway – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250-BSE	Base – 10' lengths, .040" nominal thickness, prepainted galvanized steel.	–	100 ft.
SR250-C5FT	Cover – 5' lengths, .040" nominal thickness, galvanized steel, baked enamel finish.	–	100 ft.

SR250 Series – Two-Piece Raceway – Ivory










Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250V-BSE	Base – 10' lengths, .040" nominal thickness, prepainted galvanized steel.	–	100 ft.
SR250V-C5FT	Cover – 5' lengths, .040" nominal thickness, galvanized steel, baked enamel finish.	–	100 ft.

SR250 Series – Fittings – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250-AP	Adapter Plate – For feeding SR250 raceway from existing in wall box. Removable section of cover for feeding conductors in middle of raceway run. Plastic cover.	–	5
SR250-C	Coupler – For connecting sections of raceway base.	–	40
SR250-CV	Cover Clip – Hides uneven seams or rough cut edges. Plastic cover.	–	40
SR250-EC	End Cap – Plastic cover finishes end of raceway run.	–	5
SR250-EF	Entrance End Feed – Feed raceway with conduit, ½" trade size K.O. in base. Plastic cover.	–	5
SR250-EL	External Elbow – To run raceway around outside wall. Plastic cover.	–	5
SR250-ELR	Radiused External Elbow – Maintains 1½" bend radius for Category 5e and fiber optic cable around outside corner. Plastic cover.	–	5

SR250 Series – Fittings – Ivory

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250V-AP	Adapter Plate – For feeding SR250 raceway from existing in wall box. Removable section of cover for feeding conductors in middle of raceway run. Plastic cover.	–	5
SR250V-C	Coupler – For connecting sections of raceway base.	–	40
SR250V-CV	Cover Clip – Hides uneven seams or rough cut edges. Plastic cover.	–	40
SR250V-EC	End Cap – Plastic cover finishes end of raceway run.	–	5
SR250V-EF	Entrance End Feed – Feed raceway with conduit, ½" trade size K.O. in base. Plastic cover.	–	5
SR250V-EL	External Elbow – To run raceway around outside wall. Plastic cover.	–	5
SR250V-ELR	Radiused External Elbow – Maintains 1½" bend radius for Category 5e and fiber optic cable around outside corner. Plastic cover.	–	5




Thomas & Betts

T&B Surface Raceway Systems


Multi-Outlet Systems – Two-Piece




SR250V-FL




SR250V-IL




SR250V-STF



SR250V-WR



SR2548-2V




SR250 Series – Fittings – Gray

Gray Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250V-FL	Flat Elbow – For 90° turns on same surface. Plastic Cover	–	5
SR250V-GC	Ground Clamp – To connect grounding conductor for supplemental raceway ground.	–	5
SR250V-IL	Internal Elbow – Raceway runs on inside corner. Plastic cover.	–	5
SR250V-SC	Support Clip – Mounts raceway, wired sections or cord-ended units to wall.	–	40
SR250V-STF	Side Transition Fittings – To top off run of SR250 raceway to feed B300 or B400 raceway.	–	5
SR250V-T	Tee	–	5
SR250V-WR	Wire Retainer – Holds cables/wires in place in raceway base.	–	40
SR2548V	Device Box – Twistouts on all sides of cover. Base has ½" and ¾" trade size K.O.s and rectangular K.O. for mounting to existing in-wall box. (4⅝" L. x 2⅞" W. x 1¾" D.)	–	5
SR2548-2V	Two-Gang Device Box – Twistouts on all sides of cover. Base has ½" and ¾" trade size K.O.s and rectangular K.O. for mounting to existing in-wall box. (4⅝" L. x 4¾" W. x 1¾" D.)	–	5

SR250 Series – Fittings – Ivory



Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SR250V-FL	Flat Elbow – For 90° turns on same surface. Plastic Cover	–	5
SR250V-GC	Ground Clamp – To connect grounding conductor for supplemental raceway ground.	–	5
SR250V-IL	Internal Elbow – Raceway runs on inside corner. Plastic cover.	–	5
SR250V-SC	Support Clip – Mounts raceway, wired sections or cord-ended units to wall.	–	40
SR250V-STF	Side Transition Fittings – To top off run of SR250 raceway to feed B300 or B400 raceway.	–	5
SR250V-T	Tee	–	5
SR250V-WR	Wire Retainer – Holds cables/wires in place in raceway base.	–	40
SR2548V	Device Box – Twistouts on all sides of cover. Base has ½" and ¾" trade size K.O.s and rectangular K.O. for mounting to existing in-wall box. (4⅝" L. x 2⅞" W. x 1¾" D.)	–	5
SR2548-2V	Two-Gang Device Box – Twistouts on all sides of cover. Base has ½" and ¾" trade size K.O.s and rectangular K.O. for mounting to existing in-wall box. (4⅝" L. x 4¾" W. x 1¾" D.)	–	5

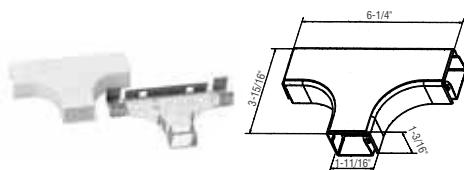


SR250V-T



SR2548V



SR2548-2V

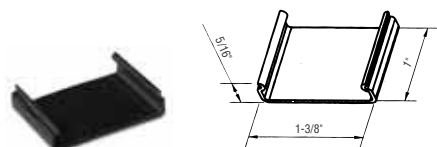

SR250V-WR


Thomas & Betts

T&B Surface Raceway Systems

Multi-Outlet Systems – Three-Piece




Other plug strips have no room for extra wiring.



T&B Multi-Outlet lets you add up to four additional wires.



Special connectors are needed with other outlet strips.

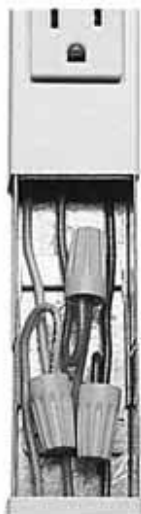

T&B Multi-Outlet uses economical standard connectors.



Existing "pry-open" covers can be damaged during installation.



T&B Multi-Outlet "screw-on" covers eliminate prying, kinking and bending.



Existing units require a large end box.



T&B Multi-Outlet uses flush ends for a better-looking installation.


The outlet strip you've been asking for.

After looking at all the outlet strips on the market, and consulting with contractors nationwide, we made a commitment to design one from scratch that would eliminate the aggravations and give a more professional installation, while saving contractors time and money.

The result is T&B Multi-Outlet System. The plug strip that contractors have been asking for. The first one with no-hassle features like a screw-on cover instead of one that must be pried off. Plenty of extra room for installing up to four additional wires. Plus a separate receptacle plate to make painting a snap without gunking the plugs.

T&B Multi-Outlet System also gets rid of large entrance-end fittings, as well as the need to cut bases and stagger covers when installing multiple lengths. With the T&B System, you get a better looking installation with fewer and less-expensive parts.

The ivory finish is a durable, baked enamel supercoat that can be easily painted for custom installations. The Multi-Outlet System is offered in single circuit and double circuit models in three popular sizes (3', 5' and 6').

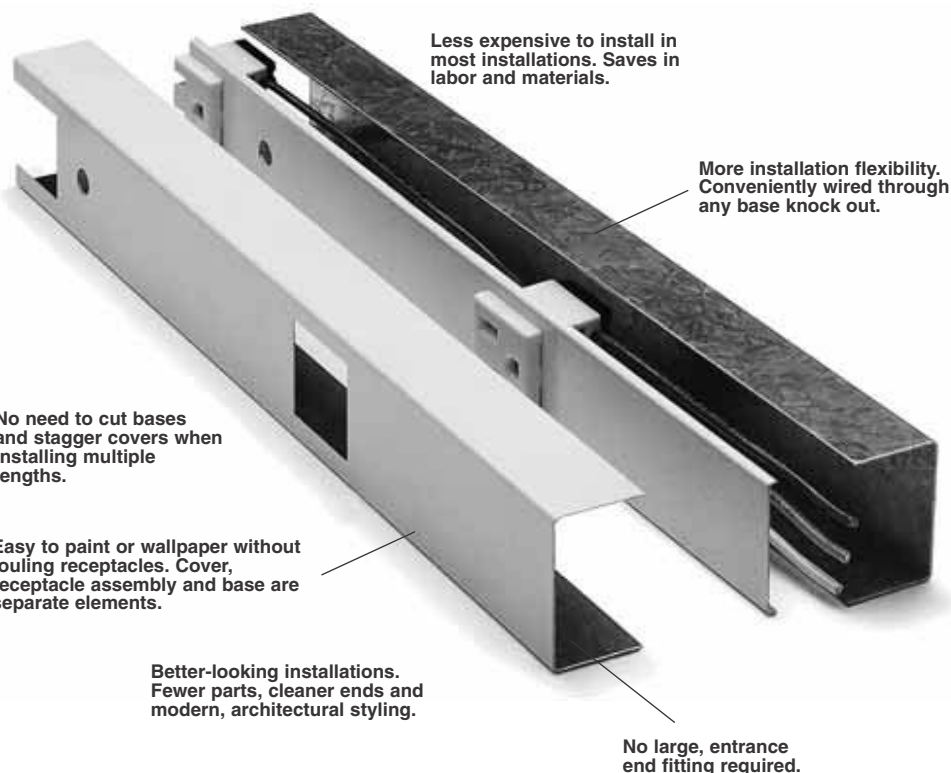

Thomas & Betts

T&B Surface Raceway Systems

Multi-Outlet Systems – Three-Piece



*KEY

CATALOG NUMBER CODE

SS Single Circuit
 DS Double Circuit
 First Numeric Digit Length (ft.)
 Last Two Digits Outlet Spacing (in.)

Multi-Outlet Assembly – Ivory Finish

Ivory Cat. No.	Length (ft.)	Outlet Spacing (in.)	# of Outlets	# of Circuits	Std. Ctn.	Std. Pkg.
SS306V	3'	6"	6	Single	–	10
SS506V	5'	6"	10	Single	–	10
SS512V	5'	12"	5	Single	–	10
SS606V	6'	6"	12	Single	–	10
SS612V	6'	12"	6	Single	–	10
SS618V	6'	18"	4	Single	–	10
DS612V	6'	12"	6	Double	–	2


All units contain 15 AMP, 125V, grounded outlets and include (2) blank end fittings (SD4) and (1) coupling (SD1).



Accessories

Ivory Cat. No.	Description	Std. Ctn.	Std. Pkg.
SD1	Coupling	–	10
SD1X	Ground Plate	–	10
SD2V	End Fitting with ½" Hub	–	10
SD3V	End Fitting Transition*	–	10
SD4V	Blank End Fitting	–	10
SD5V	Flush Mounting Plate	–	4
SD6V	Joint Cover Clip	–	10
SD7V	Flat Elbow	–	4
SD8V	External Elbow	–	4
SD9V	Internal Elbow	–	10
TPS-V	Tamper Proof Screws**	–	50


**Screws, with lockwashers. The screws are of the socket pin button head type. (Use tool ¼" socket-pin hex key for #8-32)

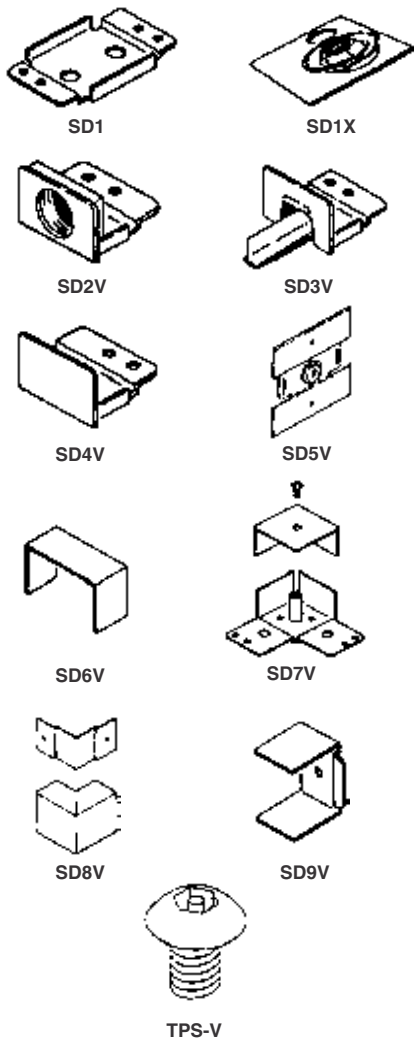

Thomas & Betts


T&B Surface Raceway Systems

Multi-Outlet Systems – Three-Piece

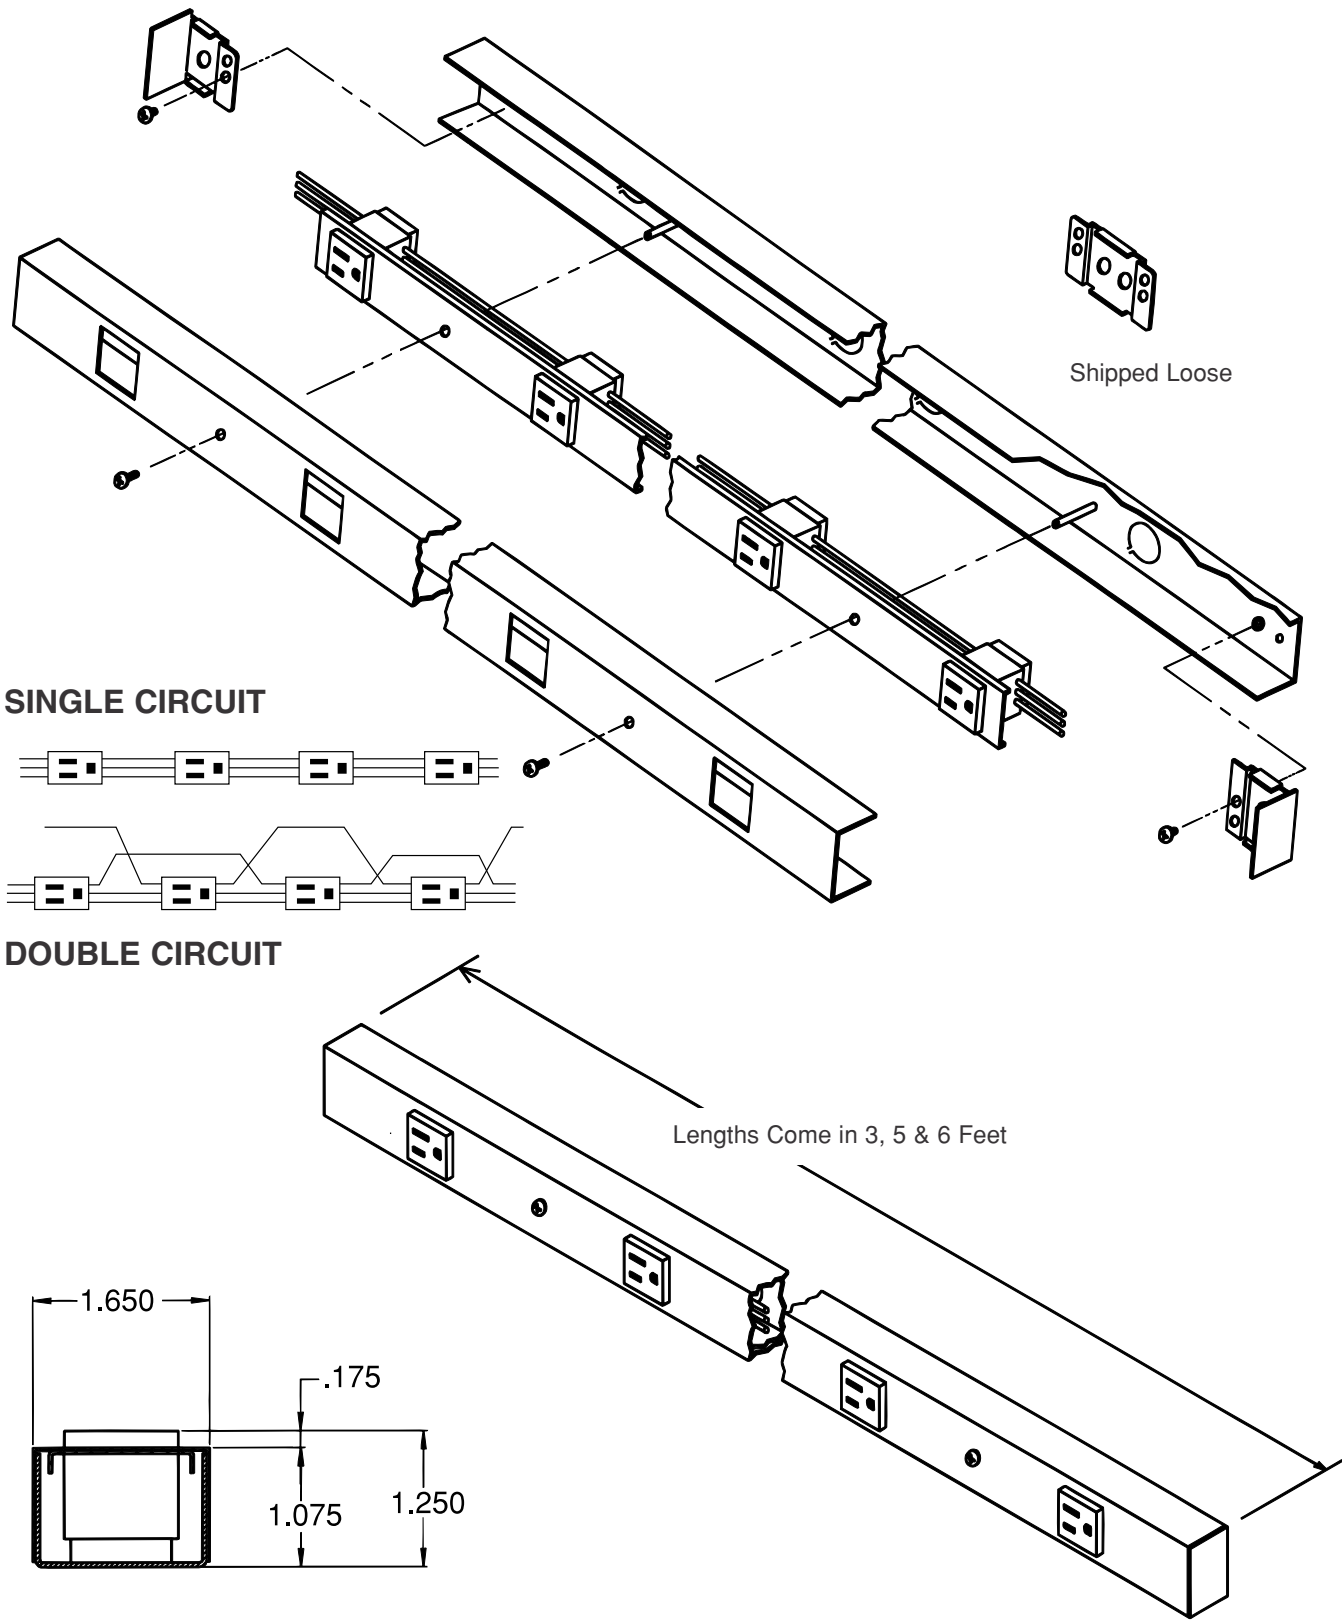

T&B Surface Raceway Systems

T&B Power Poles




Two Compartment Power Pole – Painted Ivory Finish

Cat. No.	Length	# of Outlets (20A, 125V)	Std. Ctn.	Std. Pkg.
PP102100-I	10'	4	—	1
PP102120-I	12'	4	—	1
PP102150-I	15'	4	—	1

PP102100-I

- Factory wired with two 20A, 125V duplex receptacles.
- Mounting hardware, conduit feed plate and ceiling trim plates included.
- 1/2" trade size K.O. on communication side.




Two Compartment Power Pole – Anodized Aluminum Finish

Cat. No.	Length	# of Outlets (20A, 125V)	Std. Ctn.	Std. Pkg.
PP102100-A	10'	4	—	1
PP102120-A	12'	4	—	1
PP102150-A	15'	4	—	1

PP102100-A

- Factory wired with two 20A, 125V duplex receptacles.
- Mounting hardware, conduit feed plate and ceiling trim plates included.
- 1/2" trade size K.O. on communication side.



Isolated Ground Power Poles – Two Compartment


Cat. No.	Finish	Length	# of Outlets (20A, 125V)	Std. Ctn.	Std. Pkg.
PP102100A-IG	Anodized Aluminum	10'	4	—	1
PP102100I-IG	Painted ivory	10'	4	—	1

PP102100A-IG PP102100I-IG

- Factory wired with two 20A, 125V orange duplex receptacles.
- Mounting hardware, conduit feed plate and ceiling trim plates included.
- 1/2" trade size K.O. on communication side.

T&B Surface Raceway Systems


T&B Power Poles



- To feed desk top locations with power wiring and/or communication data cabling.
- Mounting hardware, conduit feed plate and ceiling trim plates included.
- 1/2" trade size K.O. on communication side.

Blank Vertical Drop Poles – Two Compartment, Painted Ivory Finish

Cat. No.	Length	# of Outlets (20A, 125V)	Std. Ctn.	Std. Pkg.
BP102100-I	10'	—	—	1
BP102120-I	12'	—	—	1
BP102150-I	15'	—	—	1



- To feed desk top locations with power wiring and/or communication data cabling.
- Mounting hardware, conduit feed plate and ceiling trim plates included.
- 1/2" trade size K.O. on communication side.

Blank Vertical Drop Poles – Two Compartment, Anodized Finish

Cat. No.	Length	# of Outlets (20A, 125V)	Std. Ctn.	Std. Pkg.
BP102100-A	10'	—	—	1
BP102120-A	12'	—	—	1
BP102150-A	15'	—	—	1

Accessories


Cat. No.	Description	Std. Ctn.	Std. Pkg.
PP-AF	Adjustable Foot Adjust height of power pole up to 4"	—	5
PP-J	Junction Box 2 1/8" x 2 1/8" x 4"	—	1

Custom Options:

Consult factory for adding devices, modifying receptacle locations, matching color options and more.



PP-J

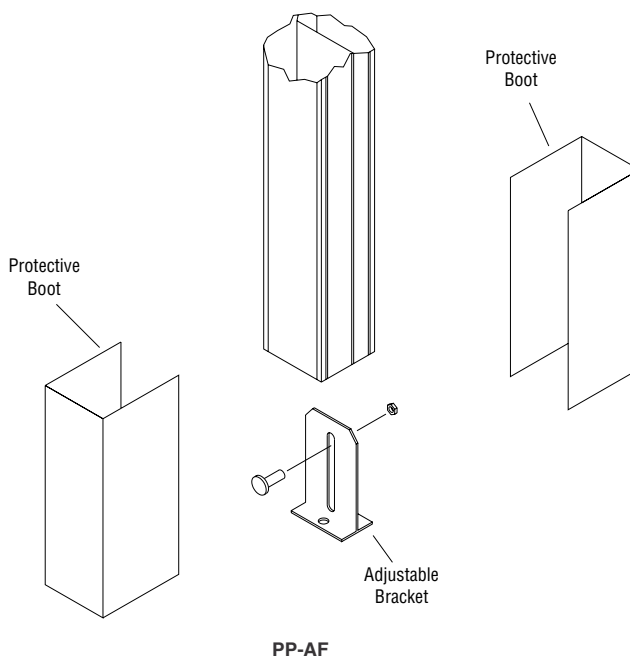

Thomas & Betts

Worksheet

T&B Surface Raceway Systems

Technical Information

Raceway Cross Sectional Areas

Raceway Series	Cross Sectional Area sq. inches	Raceway Series	Cross Sectional Area sq. inches
B300	0.220	SR100-LD	0.879
B400	0.290	SR100-TP	0.703
SR250	1.420	NM600 Each channel	4.598
SR500	3.500	Series 10	0.239
SR600	7.500	Series 30	0.711
SR600 Each channel	3.600	Series 80	0.363
SR700	15.800	Premier	6.287
SR700 Each channel	7.700	Prestige channel with flat cover	5.39
SR800 Each channel	3.700	Prestige channel with square cover	2.36
SR50-LD	0.260	Prestige channel with chamfered cover	1.40
SR50-TP	0.210		

Low Voltage Cable Dimensions

Cable/Wire Size	Diameter (in.) Approx.	Area (Sq. In.) Approx.
2 Pair, Cat. 3	0.150	0.0177
3 Pair, Cat. 3	0.160	0.0201
4 Pair, Cat. 3	0.190	0.0284
Unshielded Twisted Pair (UTP) 24 AWG	0.210	0.0346
4 Pair, Cat. 5e	0.210	0.0346
25 Pair, Cat. 3	0.360	0.1018
25 Pair, Cat. 5	0.337	0.0892
50 Pair	0.500	0.1963
75 Pair	0.600	0.2827
100 Pair	0.680	0.3632
Type 1	0.390	0.1195
Shielded Twisted Pair	0.465	0.1698
Type 2	0.275	0.0573
Type 9	0.195	0.0299
RG58A/U, 18 Gage	0.242	0.0460
Coaxial Cable	0.242	0.0460
RG59/U, 22 Gage	0.270	0.0573
RG62A/U, 20 Gage	0.240	0.0452
RG6/U, 22 Gage	0.044	0.0015
Twinaxial Cable	0.050	0.0020
24 AWG	0.057	0.0026
Signal Wire	0.066	0.0034
22 AWG		
20 AWG		
18 AWG		

Communication Cable

Capacity Formula:

For those wire and cable types not listed or for cables with different dimensions:

The number of conductors = 20 - 40% of the cross sectional area of raceway cross sectional area of cable

T&B Surface Raceway Systems

Technical Information

Power Wiring Capacity

Surface Raceways			Wire Capacity Without Devices					Wire Capacity With Devices				
			#6	#8	#10	#12	#14	#6	#8	#10	#12	#14
B300 Series	¾ w. x 1½ d.		-	-	4	7	9	-	-	-	-	-
B400 Series	¾ w. x 2½ d.		-	-	5	8	11	-	-	-	-	-
SR50LD Series	¾ w. x ½ d.		-	-	2	3	3	-	-	-	-	-
SR50TP Series	¾ w. x ½ d.		-	-	2	3	3	-	-	-	-	-
SR100LD Series	1½ w. x ¾ d.		-	-	5	10	13	-	-	-	-	-
SR100TP Series	1½ w. x ¾ d.		-	-	5	8	11	-	-	-	-	-
SR250 Series	1½ w. x 1 d.		-	-	31	48	65	-	-	-	-	-
SR500 Series	2¾ w. x 1¾ d.		27	44	76	119	160	6	8	10	18	26
SR600 Series												
Each Channel (With Barrier)	4¾ w. x 1¾ d.		28	47	181	128	171	7	8	15	24	32
SR600 Series												
Total Raceway (Without Barrier)	4¾ w. x 1¾ d.		57	94	163	256	344	10	15	18	34	34
NM600 Series*	3½ w. x 1¾ d.											
Each Channel (With Barrier)			22	32	49	45	41	22	32	49	45	41
SR700 Series												
Each Channel (With Barrier)	4¾ w. x 3¾ d.		61	84	171	270	363	10	15	18	34	34
SR700 Series												
Total Raceway (Without Barrier)	4¾ w. x 3¾ d.		122	169	343	540	726	66	92	187	295	396
SR800 Series												
Each Channel (With Barrier)	7¼ w. x 1¾ d.		28	47	81	128	171	7	8	15	24	32

*Capacity is reduced to allow for maximum permissible heat rise.

T&B Surface Raceway Systems

Technical Information

Communication Cable Capacity*

Surface Metal Raceways

CABLE / WIRE SIZE		B300	B400	SR250	SR500	SR600	SR600B Each Comp.	SR700	SR700B Each Comp.	SR800 Each Comp.
Unshielded Twisted Pair (UTP) 24 AWG	2 Pair, Cat. 3	2	3	16	40	85	42	179	85	42
	3 Pair, Cat. 3	2	3	14	35	75	37	157	75	37
	4 Pair, Cat. 3	1	2	10	25	53	26	111	53	26
	4 Pair, Cat. 5	1	2	8	20	43	21	91	43	21
	25 Pair, Cat. 3	0	1	3	7	15	7	31	15	7
	25 Pair, Cat. 5	0	1	3	8	17	8	35	17	8
	50 Pair	0	0	1	4	8	4	16	8	4
	75 Pair	0	0	1	2	5	3	11	5	3
	100 Pair	0	0	1	2	4	2	9	4	2
	Type 1	0	0	2	6	13	6	26	13	6
Shielded Twisted Pair	Type 2	0	0	2	4	9	4	19	9	4
	Type 9	1	1	5	12	26	13	55	26	13
Coaxial Cable	RG58A/U, 18 Gage	1	2	9	23	50	25	106	50	25
	RG59/U, 22 Gage	1	1	6	15	33	16	69	33	16
	RG62A/U, 20 Gage	1	1	6	15	33	16	69	33	16
	RG6/U, 22 Gage	1	1	5	12	26	13	55	26	13
Twinaxial Cable	100 Ohm	1	1	6	15	33	16	70	33	16
Signal Wire	24 AWG	27	36	189	467	1000	493	2107	1000	493
	22 AWG	21	27	142	350	750	370	1580	750	370
	20 AWG	16	21	109	269	577	285	1215	577	285
	18 AWG	12	16	84	206	441	218	929	441	218

Surface Nonmetallic Raceways


CABLE / WIRE SIZE		SR50-LD	SR50-TP	SR100-LD	SR100-TP	NM600 Each Comp.
Unshielded Twisted Pair (UTP) 24 AWG	2 Pair, Cat. 3	3	2	10	8	52
	3 Pair, Cat. 3	3	2	9	7	46
	4 Pair, Cat. 3	2	1	6	5	32
	4 Pair, Cat. 5	2	1	5	4	27
	25 Pair, Cat. 3	1	0	2	1	9
	25 Pair, Cat. 5	1	0	2	2	10
	50 Pair	0	0	1	1	5
	75 Pair	0	0	1	0	3
	100 Pair	0	0	0	0	3
	Type 1	0	0	1	1	8
Shielded Twisted Pair	Type 2	0	0	1	1	5
	Type 9	1	1	3	2	16
Coaxial Cable	RG58A/U, 18 Gage	2	1	6	5	31
	RG59/U, 22 Gage	1	1	4	3	20
	RG62A/U, 20 Gage	1	1	4	3	20
	RG6/U, 22 Gage	1	1	3	2	16
Twinaxial Cable	100 Ohm	1	1	4	3	20
Signal Wire	24 AWG	35	28	117	94	613
	22 AWG	26	21	88	70	460
	20 AWG	20	16	68	54	354
	18 AWG	15	12	52	41	270

* Fill capacity calculations were made at the 20% fill rate.


T&B Surface Raceway Systems

Nonmetallic Surface Raceway


T&B Single Channel Nonmetallic Surface Raceway



SERIES 10

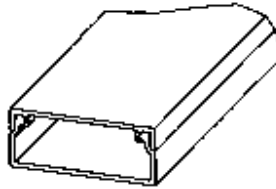

SERIES 30



SERIES 80

Single Channel Wirefill Capacities				RWMAI-XXX RWMI-XXX RVMI-XXX	RWMA3-XXX RWM3-XXX RVM3-XXX	RWM8 RVM8
				SERIES 10	SERIES 30	SERIES 80
				CSA = .239 sq. in.	CSA = .711 sq. in.	CSA = .363 sq. in.
Coax Cables	RG6/U	Dia. = .270 in.	40% Fill	1	4	2
			60% Fill	—	7	—
	RG11/U	Dia. = .405 in.	40% Fill	0	2	1
			60% Fill	—	3	—
	RG58/U	Dia. = .193 in.	40% Fill	3	9	4
			60% Fill	—	14	—
	RG59/U	Dia. = .242 in.	40% Fill	2	6	3
			60% Fill	—	9	—
	RG62A/U	Dia. = .242 in.	40% Fill	2	6	3
			60% Fill	—	9	—
Lan Cables	CAT5, 4 pr. Unshielded		40% Fill	1	5	2
			60% Fill	—	8	—
Fiber Optic Cables 62.51 in. (125 mm)	2 Strand	Dia. = .175 in.	40% Fill	3	11	6
			60% Fill	—	17	—
	4 Strand	Dia. = .175 in.	40% Fill	3	11	6
			60% Fill	—	17	—
	6 Strand	Dia. = .210 in.	40% Fill	2	8	4
			60% Fill	—	12	—
Signal Cables	18 AWG	Dia. = .066 in.	40% Fill	27	83	42
			60% Fill	—	124	—
	20 AWG	Dia. = .057 in.	40% Fill	37	111	56
			60% Fill	—	167	—
	22 AWG	Dia. = .050 in.	40% Fill	48	144	73
			60% Fill	—	217	—
	24 AWG	Dia. = .044 in.	40% Fill	62	187	95
			60% Fill	—	280	—
Power (THHN)	10 AWG	Dia. = .164 in.	Determined by UL Testing	4	13	6
	12 AWG	Dia. = .13 in.		5	15	11
	14 AWG	Dia. = .111 in.		6	15	12

The above quantities represent the average diameters specified.

To calculate the number of conductors for a cable diameter not specified, use the following equation:

$$\text{Conductor Quantity} = \frac{(\text{Raceway Cross Sectional Area}) + (\text{Percentage of Fill})}{(0.7854) + (\text{Cable Diameter})^2}$$

Example:
Series 80: Raceway Cross Sectional Area = 0.363
Percentage of Fill = 0.4
Cable Diameter = 0.250

Thomas & Betts


T&B Surface Raceway Systems

Nonmetallic Surface Raceway


T&B Premier™ Nonmetallic Surface Raceway



Channel A

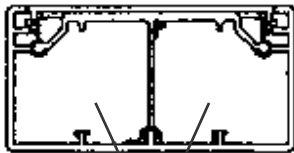

Channel C

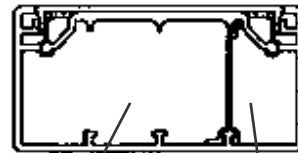

Channel B

Channel D

Wirefill Chart Without Device Yoke and Box Base

Channel Cross Sectional Area (In. ²) =				Channel A	Channel B	Channel C	Channel D
				6.287	4.326	2.76	1.147
Coax Cables	RG6/U	Dia. = 0.270"	40% Fill	43	30	19	8
	RG11/U	Dia. = 0.405"	40% Fill	19	13	8	3
	RG58/U	Dia. = 0.193"	40% Fill	85	59	37	15
	RG59/U	Dia. = 0.242"	40% Fill	54	37	24	9
	RG62A/U	Dia. = 0.242"	40% Fill	54	37	24	9
Lan Cables	Cat5, 4 pr. Unshielded	Dia. = 0.250"	40% Fill	51	35	22	9
Fiber Optic Cables (62.5/125 mm)	2 Strand	Dia. = 0.175"	40% Fill	104	71	45	19
	4 Strand	Dia. = 0.175"	40% Fill	104	71	45	19
	6 Strand	Dia. = 0.210"	40% Fill	72	49	31	13
Signal Cables	18 AWG	Dia. = 0.066"	40% Fill	735	505	322	134
	20 AWG	Dia. = 0.057"	40% Fill	985	678	432	179
	22 AWG	Dia. = 0.050"	40% Fill	1280	881	562	233
	24 AWG	Dia. = 0.044"	40% Fill	1653	1138	726	301
Power (THHN)	10 AWG	Dia. = 0.164"	Determined by UL Testing	50	34	20	12
	12 AWG	Dia. = 0.13"		55	37	24	14
	14 AWG	Dia. = 0.111"		56	38	24	16

The above quantities represent the average diameters specified.

To calculate the number of conductors for a cable diameter not specified, use the following equation:

$$\text{Conductor Quantity} = \frac{(\text{Raceway Cross Sectional Area}) + (\text{Percentage of Fill})}{(0.7854) + (\text{Cable Diameter})^2}$$

Example:
Raceway Cross Sectional Area = 6.287
Percentage of Fill = 0.2
Cable Diameter = 0.270

$$\text{Conductor Quantity} = \frac{(6.287) + (0.2)}{(0.7854) + (0.270)^2}$$


$$\text{Conductor Quantity} = 21.96$$

$$\text{Conductor Quantity} = 21$$


T&B Surface Raceway Systems

Nonmetallic Surface Raceway

T&B Premier™ Nonmetallic Surface Raceway

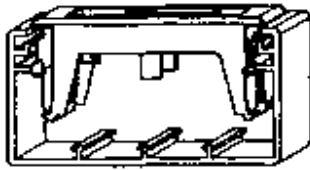

Channel A

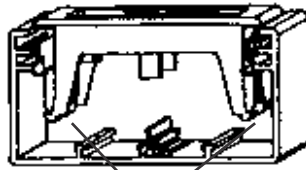


Channel C



Channel D

Channel B

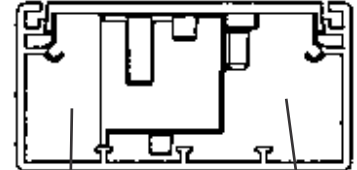

Channel F

Channel E

Wirefill Chart With Device Yoke and Box Base

Channel Cross Sectional Area (In. ²) =				With Device Yoke and Box Base				With Dual Device Yoke	
				Channel A	Channel B	Channel C	Channel D	Channel E	Channel F
				1.98	1.364	0.99	0.616	2.224	1.132
Coax Cables	RG6/U	Dia. = 0.270"	40% Fill	13	9	6	4	15	N/A
	RG11/U	Dia. = 0.405"	40% Fill	6	4	3	1	6	N/A
	RG58/U	Dia. = 0.193"	40% Fill	27	18	13	8	30	N/A
	RG59/U	Dia. = 0.242"	40% Fill	17	11	8	5	19	N/A
	RG62A/U	Dia. = 0.242"	40% Fill	17	11	8	5	19	N/A
Lan Cables	Cat5, 4 pr. Unshielded	Dia. = 0.250"	40% Fill	16	11	8	5	18	N/A
Fiber Optic Cables (62.5/125 mm)	2 Strand	Dia. = 0.175"	40% Fill	32	22	16	10	36	N/A
	4 Strand	Dia. = 0.175"	40% Fill	32	22	16	10	36	N/A
	6 Strand	Dia. = 0.210"	40% Fill	22	15	11	7	25	N/A
Signal Cables	18 AWG	Dia. = 0.066"	40% Fill	231	159	115	72	260	N/A
	20 AWG	Dia. = 0.057"	40% Fill	310	213	155	96	348	N/A
	22 AWG	Dia. = 0.050"	40% Fill	403	277	201	125	453	N/A
	24 AWG	Dia. = 0.044"	40% Fill	520	358	260	162	585	N/A
Power (THHN)	10 AWG	Dia. = 0.164"	Determined by UL Testing	15	10	6	5	N/A	8
	12 AWG	Dia. = 0.13"		17	11	7	6	N/A	9
	14 AWG	Dia. = 0.111"		17	11	7	6	N/A	9

The above quantities represent the average diameters specified.

To calculate the number of conductors for a cable diameter not specified, use the following equation:

$$\text{Conductor Quantity} = \frac{(\text{Raceway Cross Sectional Area}) + (\text{Percentage of Fill})}{(0.7854) + (\text{Cable Diameter})^2}$$

Example:

Raceway Cross Sectional Area = 1.98

Percentage of Fill = 0.2

Cable Diameter = 0.270

$$\text{Conductor Quantity} = \frac{(1.98) + (0.2)}{(0.7854) + (0.270)^2}$$

Conductor Quantity = 6.91

Conductor Quantity = 6

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

T&B Premier™ Surface Raceway




5RWEED



5RWEID



5RWEFD



5RWTD

Wirefill Chart For Premier Cat5 Inserts

				5RWEED	5RWEID	5RWEFD	5RWTD
Channel Cross Sectional Area (In. ²) =				4.154	2.598	5.572	3.743
Coax Cables	RG6/U	Dia. = 0.270"	40% Fill	29	18	38	26
			60% Fill	43	27	58	39
	RG11/U	Dia. = 0.405"	40% Fill	12	8	17	11
			60% Fill	19	12	25	17
	RG58/U	Dia. = 0.193"	40% Fill	56	35	76	51
			60% Fill	85	53	114	76
	RG59/U	Dia. = 0.242"	40% Fill	36	22	48	32
			60% Fill	54	33	72	48
Lan Cables	RG62A/U	Dia. = 0.242"	40% Fill	36	22	48	32
			60% Fill	54	33	72	48
	Cat5, 4 pr. Unshielded	Dia. = 0.250"	40% Fill	33	21	45	45
			60% Fill	50	31	68	45
Fiber Optic Cables (62.5/125 mm)	2 Strand	Dia. = 0.175"	40% Fill	69	43	92	62
			60% Fill	103	64	138	93
	4 Strand	Dia. = 0.175"	40% Fill	69	43	92	62
			60% Fill	103	64	138	93
	6 Strand	Dia. = 0.210"	40% Fill	47	30	64	43
			60% Fill	71	45	96	64
Signal Cables	18 AWG	Dia. = 0.066"	40% Fill	485	303	651	437
			60% Fill	728	455	977	656
	20 AWG	Dia. = 0.057"	40% Fill	651	407	873	586
			60% Fill	976	610	1310	880
	22 AWG	Dia. = 0.050"	40% Fill	846	529	1135	762
			60% Fill	1269	793	1702	1143
	24 AWG	Dia. = 0.044"	40% Fill	1092	683	732	984
Power (THHN)			60% Fill	1639	1025	2198	1476
	10 AWG	Dia. = 0.164"	Determined by UL Testing	33	20	44	29
	12 AWG	Dia. = 0.13"		36	22	48	32
	14 AWG	Dia. = 0.111"		37	23	49	33

The above quantities represent the average diameters specified.

To calculate the number of conductors for a cable diameter not specified, use the following equation:

$$\text{Conductor Quantity} = \frac{(\text{Raceway Cross Sectional Area}) + (\text{Percentage of Fill})}{(0.7854) + (\text{Cable Diameter})^2}$$

Example:
Raceway Cross Sectional Area = 4.154
Percentage of Fill = 0.4
Cable Diameter = 0.270

$$\text{Conductor Quantity} = \frac{(4.154) + (0.4)}{(0.7854) + (0.270)^2}$$


Conductor Quantity = 29.02
Conductor Quantity = 29

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

T&B Prestige™ Multi-Channel

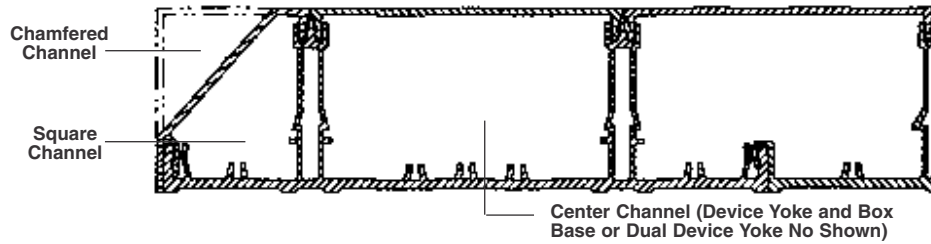

Wirefill Chart For T&B Prestige™ Multi-Channel

				Center w/o Devices	Center w/Device Yoke	Center w/ Device Yolk & Box Base	Center w/ Cross-over Bridge	Center w/Dual Device Yoke	Chamfered	Square	Extension w/o Devices	Extension w/Device Yoke	Extension w/Device Yoke & Box Base
Channel Cross Sectional Area (In. ²) =				5.39	3.33	1.10	2.69	1.98	1.40	2.36	5.27	3.25	1.08
Coax Cables	RG6/U	Dia. = 0.270"	40% Fill	37	23	7	18	13	9	16	36	22	7
	RG11/U	Dia. = 0.405"	40% Fill	16	10	3	8	6	4	7	16	10	3
	RG58/U	Dia. = 0.193"	40% Fill	73	45	15	36	27	19	32	72	44	14
	RG59/U	Dia. = 0.242"	40% Fill	46	28	9	23	17	12	20	45	28	9
	RG62A/U	Dia. = 0.242"	40% Fill	46	28	9	23	17	12	20	45	28	9
Lan Cables	Cat5, 4 pr. Unshielded	Dia. = 0.250"	40% Fill	43	27	8	21	16	11	19	42	26	8
Fiber Optic Cables (62.5/125 mm)	2 Strand	Dia. = 0.175"	40% Fill	89	55	32	44	32	23	44	87	54	17
	4 Strand	Dia. = 0.175"	40% Fill	89	55	32	44	32	23	44	87	54	17
	6 Strand	Dia. = 0.210"	40% Fill	62	38	22	31	22	16	31	60	37	12
Signal Cables	18 AWG	Dia. = 0.066"	40% Fill	630	389	128	314	231	164	276	616	380	125
	20 AWG	Dia. = 0.057"	40% Fill	845	521	172	421	310	219	370	826	509	168
	22 AWG	Dia. = 0.050"	40% Fill	1098	678	224	548	402	285	481	1073	662	219
	24 AWG	Dia. = 0.044"	40% Fill	1418	875	289	707	520	369	621	1386	855	283
Power in 3 Channels Using Extension Channel (THHN)	10 AWG	Dia. = 0.164"	Determined by UL Testing	17	10	3	8	N/A	N/A	N/A	14	8	2
	12 AWG	Dia. = 0.13"		17	10	3	8	N/A	N/A	N/A	15	9	3
	14 AWG	Dia. = 0.111"		18	11	3	8	N/A	N/A	N/A	16	9	3
Power in 3 Channels Without Using Extension Channel (THHN)	10 AWG	Dia. = 0.164"	Determined by UL Testing	23	14	4	11	N/A	6	10	N/A	N/A	N/A
	12 AWG	Dia. = 0.13"		22	13	4	10	N/A	6	10	N/A	N/A	N/A
	14 AWG	Dia. = 0.111"		24	14	4	11	N/A	8	12	N/A	N/A	N/A
Power in Center Channel Only (THHN)	10 AWG	Dia. = 0.164"	Determined by UL Testing	44	27	8	21	N/A	N/A	N/A	N/A	N/A	N/A
	12 AWG	Dia. = 0.13"		45	27	9	22	N/A	N/A	N/A	N/A	N/A	N/A
	14 AWG	Dia. = 0.111"		44	28	9	22	N/A	N/A	N/A	N/A	N/A	N/A

The above quantities represent the average diameters specified.

To calculate the number of conductors for a cable diameter not specified, use the following equation:

$$\text{Conductor Quantity} = \frac{(\text{Raceway Cross Sectional Area}) + (\text{Percentage of Fill})}{(0.7854) + (\text{Cable Diameter})^2}$$

Example:

Center w/o Devices: Raceway Cross Sectional Area = 5.39

Percentage of Fill - 0.4

Cable Diameter = 0.250

$$\text{Conductor Quantity} = \frac{(5.394) + (0.4)}{(0.7854) + (0.250)^2}$$

Conductor Quantity = 43.92


Conductor Quantity = 43

Thomas & Betts


T&B Surface Raceway Systems

Nonmetallic Surface Raceway

T&B Cove Molding Raceway



Single Channel



Multi-Channel

Wirefill Chart For T&B Cove Molding Raceway

				Single Channel Series 90 Cove Raceway	Multi-Channel Cove Raceway Series 900		
					Cove Channel A	Cove Channel B	Cove Channel C
Channel Cross Sectional Area (In. ²) =				1.169	0.769	2.031	0.769
Coax Cables	RG6/U	Dia. = 0.270"	40% Fill	8	5	14	5
	RG11/U	Dia. = 0.405"	40% Fill	3	2	6	2
	RG58/U	Dia. = 0.193"	40% Fill	15	10	27	10
	RG59/U	Dia. = 0.242"	40% Fill	10	6	17	6
	RG62A/U	Dia. = 0.242"	40% Fill	10	6	17	6
Lan Cables	Cat5, 4 pr. Unshielded	Dia. = 0.250"	40% Fill	9	6	16	6
Fiber Optic Cables (62.5/125 mm)	2 Strand	Dia. = 0.175"	40% Fill	19	12	33	12
	4 Strand	Dia. = 0.175"	40% Fill	19	12	33	12
	6 Strand	Dia. = 0.210"	40% Fill	13	8	23	8
Signal Cables	18 AWG	Dia. = 0.066"	40% Fill	136	89	237	89
	20 AWG	Dia. = 0.057"	40% Fill	183	120	318	120
	22 AWG	Dia. = 0.050"	40% Fill	238	156	413	156
	24 AWG	Dia. = 0.044"	40% Fill	307	202	534	202
Power 3 Channels (THHN)	10 AWG	Dia. = 0.164"	Determined by UL Testing	N/A	4	10	4
	12 AWG	Dia. = 0.13"		N/A	4	12	4
	14 AWG	Dia. = 0.111"		N/A	5	15	5
Power in 2 Channels A+B or B+C (THHN)	10 AWG	Dia. = 0.164"	Determined by UL Testing	N/A	(4)	11	(4)
	12 AWG	Dia. = 0.13"		N/A	(5)	14	(5)
	14 AWG	Dia. = 0.111"		N/A	(6)	16	(6)
Power in Center (B) Channel (THHN)	10 AWG	Dia. = 0.164"	Determined by UL Testing	11	N/A	14	N/A
	12 AWG	Dia. = 0.13"		12	N/A	16	N/A
	14 AWG	Dia. = 0.111"		14	N/A	20	N/A

The above quantities represent the average diameters specified.

To calculate the number of conductors for a cable diameter not specified, use the following equation:

$$\text{Conductor Quantity} = \frac{(\text{Cove Cross Sectional Area}) + (\text{Percentage of Fill})}{(0.7854) + (\text{Cable Diameter})^2}$$

Example:
Cove Cross Sectional Area = 2.031
Percentage of Fill = 0.4
Cable Diameter = 0.270

$$\text{Conductor Quantity} = \frac{(2.031) + (0.4)}{(0.7854) + (0.270)^2}$$

Conductor Quantity = 14.19
Conductor Quantity = 14

T&B Surface Raceway Systems

Small One-Piece Surface Metal Raceway Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Mono Systems Cat. No.
V200	Use B300-10	Raceway 10' lengths	Use SMS500
V200F	Use B3400F	Flexible Section	
201	Use B3401	Coupling	Use SMS5701
202	Use B302	Bushing	Use SMS502
V203	Use B3403	Supporting Clip	Use SMS5703
V205	Use B304	Strap	Use SMS504
V206	Use B306	Connection Cover	Use SMS506
V211	Use B311	90 deg Flat Elbow	Use SMS511
V211LH	Use B3411LH	Internal Twisted Elbow	Use SMS5711LH
V211RH	Use B3411RH	Internal Twisted Elbow	Use SMS5711RH
V217	Use B317	Internal Elbow	Use SMS517
V218	Use B318	External Elbow	Use SMS518
V251	Use B3451	Extension Adapter	Use SMS5751
V500-5	B300-5	Raceway 5' lengths	no equivalent
no equivalent	B300-8	Raceway 8' lengths	no equivalent
V500	B300-10	Raceway 10' lengths	SMS500
502	B302	Bushing (Plated)	SMS502
V504	B304	Strap	SMS504
V506	B306	Connection Cover	SMS506
V511	B311	90 deg Flat Elbow	SMS511
V517	B317	Internal Elbow	SMS517
V518	B318	External Elbow	SMS518
V700-5	B400-5	Raceway 5' lengths	no equivalent
no equivalent	B400-8	Raceway 8' lengths	no equivalent
V700	B400-10	Raceway 10' lengths	SMS700
702	B402	Bushing (Plated)	SMS702
V704	B404	Strap	SMS704
V706	B406	Connection Cover	SMS706
V711	B411	90 deg Flat Elbow	SMS711
V717	B417	Internal Elbow	SMS717
V718	B418	External Elbow	SMS718
V5700F	B3400F	Flexible Section	SMS5700F
5701	B3401	Coupling (Galvanized)	SMS5701
V5703	B3403	Supporting Clip	SMS5703
V5711LH	B3411LH	Internal Twisted Elbow - Left hand	SMS5711LH
V5711RH	B3411RH	Internal Twisted Elbow - Right hand	SMS5711RH
V5715	B3415	Tee	SMS5715
V5717A	Use B317 or B417	Internal Pull Elbow (ea. leg 5½" l.)	Use SMS517 or SMS518
V5719	B3419	Corner Box	SMS5719
V57240	B34240	S/P Switch & Box	SMS57240
V57242	B34242	Utility Box	SMS57242
V57243G	B34243G	Gr. Receptacle & Box	SMS57243G
V5734	Use B3437 & B3436	Round Blank Extension Box (4¾" dia.)	no equivalent
V5734A	Use B3438 & B3436	Round Utility Box (4¾" dia.)	no equivalent
V5736	B3436	Round Blank Cover 4¾" dia.	SMS5736
V5737	B3437	Round Extension Box 4¾" dia.	SMS5737
V5737A	B3437A	Round Extension Box 5½" dia.	SMS5737A
V5738	B3438	Round Fixture Box 4¾" dia.	SMS5738
V5738A	B3438A	Round Fixture Box 5½" dia.	SMS5738A
V5739	B3439	Round Fixture Box 6¾" dia.	SMS5739
V5739A	B3439A	Round Extension Box 6¾" dia.	SMS5739A

T&B Surface Raceway Systems

Small One-Piece Surface Metal Raceway Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Mono Systems Cat. No.
V5744	B3444	Extra Deep Switch & Receptacle Box 2¾" h.	SMS5744
V5744-2	B3444-2	Extra Deep Switch & Receptacle Box 2¾" h. - 2 Gang	SMS5744-2
V5744-3	B3444-3	Extra Deep Switch & Receptacle Box 2¾" h. - 3 Gang	SMS5744-3
V5744S	B3444S	Deep Switch & Receptacle Box 2¼" h.	SMS5744S
V5744S-2	Use B3444-2	Deep Switch & Receptacle Box 2¼" h. - 2 gang	use SMS5744-2
V5744S-3	Use B3444-3	Deep Switch & Receptacle Box 2¼" h. - 3 gang	use SMS5744-3
V5747	B3447	Shallow Switch & Receptacle Box 1¾" h.	SMS5747
V5747-2	B3447-2	Shallow Switch & Receptacle Box 1¾" h. - 2 Gang	SMS5747-2
V5747-3	Use B3448-3	Shallow Switch & Receptacle Box 1¾" h. - 3 Gang	use SMS5748-2
V5748	B3448	Switch & Receptacle Box 1¾" h.	SMS5748
V5748-2	B3448-2	Switch & Receptacle Box 1¾" h. - 2 Gang	SMS5748-2
V5748-3	B3448-3	Switch & Receptacle Box 1¾" h. - 3 Gang	SMS5748-3
V5748-4	B3448-4	Switch & Receptacle Box 1¾" h. - 4 Gang	SMS5748-4
V5748-5	B3448-5	Switch & Receptacle Box 1¾" h. - 5 Gang	SMS5748-5
V5748-6	B3448-6	Switch & Receptacle Box 1¾" h. - 6 Gang	SMS5748-6
V5748S	B3448S	Shallow Switch & Receptacle Box 1½" h.	SMS5748S
V5751	B3451	Extension Box 1½" h	SMS5751
V5751-2	B3451-2	Extension Box 1½" h - 2 Gang	SMS5751-2
V5751-3	B3451-3	Extension Box 1½" h - 3 Gang	SMS5751-3
R5752	B3452-2R	Fire Alarm Box	SMS5752
R5753	B3453-2R	Fire Alarm Box	SMS5753
5781	B3481	Box Connector ½ male	SMS5781
5781A	B3481A	Box Connector ¾ male	SMS5781A
5782	B3482	Conduit Connector ½ female	SMS5782
5782A	B3482A	Conduit Connector ¾ female	SMS5782A
V5785	B3485	Combination Connector	SMS5785

T&B Surface Raceway Systems

Two-Piece Surface Metal Raceway Cross Reference – Single Channel

Sorted by Wiremold Catalog Number

Wiremold Cat. No. 2000 Series 0.80 sq in.	Wiremold Cat. No. 2100 Series 0.81 sq. in	Wiremold Cat. No. 2400 Series 1.67 sq. in.	T&B Cat. No. SR250 Series 1.42 sq. in.	Description
Raceway - Gray				
G2000-5	G2100B	-	SR250-BSE	Raceway Base 10'
Use G2000C	G2100C	-	Use SR250-C5FT	Raceway Cover 5' (scored)
G2000C	G2100CA	-	SR250-C5FT	Raceway Cover 5' (unscored)
Raceway Fittings - Galvanized (for both Ivory & Gray versions)				
2000WC	2100WC	2400WC	SR250-WR	Wire Retainer
2001	2101	2401	SR250-C	Coupling
2009	2109	2409	SR250-GC	Ground Clamp
Raceway Fittings - Gray				
2003	2003 (not typo)	-	SR250-SC	Supporting Clip
G2006	G2106	-	SR250-CV	Joint Cover Clip
G2010A2	G2110A	-	SR250-EF	End Feed Fitting
no equivalent	G2110C	-	SR250-EF	End Feed Fitting
G2010B	G2110B	-	SR250-EC	Blank End Cap
G2011	G2111	-	SR250-FL	Flat Elbow
G2015	G2115	-	SR250-T	Tee
2017TC	G2117TC	-	SR250-IL	Internal Corner Coupling / Elbow
G2018C	G2118A	-	SR250-EL	External Elbow
no equivalent	no equivalent	-	SR250-ELR	Radiused External Elbow
G2048	G2141	-	SR2548	Single Gang Device Box - 1¾" d.
G2048-2	G2141-2	-	SR2548-2	Two Gang Device Box - 1¾" d.
G2051H	G2051H (not typo)	-	SR250-AP	Flush Adapter Plate
Use G2048	G2151	-	no equivalent	Extension Box - 1¾" d.
(Rect. K.O. in base)				
Use G2048-2	G2151-2	-	Use SR2548-2	Two Gang Extension Box - 1¾" d.
(Rect. K.O. in base)			(Rect. K.O. in base)	
no equivalent	no equivalent	-	SR250-STF	Side Transition Fitting (to 300 & 400)
Raceway - Ivory				
V2000B-5	V2100B	V2400B	SR250V-BSE	Raceway Base 10'
Use V2000C	V2100C	Use V2400C	Use SR250V-C5FT	Raceway Cover 5' (scored)
V2000C	V2100CA	V2400C	SR250V-C5FT	Raceway Cover 5' (unscored)
Raceway Fittings - Ivory				
V2003	V2003 (not typo)	no equivalent	SR250V-SC	Supporting Clip
V2006	V2106	V2406	SR250V-CV	Joint Cover Clip
V2010A2	V2110A	V2410A	SR250V-EF	End Feed Fitting
no equivalent	V2110C	no equivalent	SR250V-EF	End Feed Fitting
V2010B	V2110B	V2410B	SR250V-EC	Blank End Cap
V2011	V2111	V2411	SR250V-FL	Flat Elbow
V2015	V2115	no equivalent	SR250V-T	Tee
2017TC	V2117TC	V2417	SR250V-IL	Internal Corner Coupling / Elbow
V2018C	V2118A	V2418	SR250V-EL	External Elbow
no equivalent	no equivalent	no equivalent	SR250V-ELR	Radiused External Elbow
V2048	V2141	V2448	SR2548V	Single Gang Device Box - 1¾" d.
V2048-2	V2141-2	V2448-2	SR2548-2V	Two Gang Device Box - 1¾" d.
V2051H	V2051H (not typo)	no equivalent	SR250V-AP	Flush Adapter Plate
Use V2048	V2151	Use V2448	no equivalent	Extension Box - 1¾" d.
(Rect. K.O. in base)		(Rect. K.O. in base)		
Use V2048-2	V2151-2	Use V2448-2	Use SR2548-2V	Two Gang Extension Box - 1¾" d.
(Rect. K.O. in base)	(Rect. K.O. in base)		(Rect. K.O. in base)	
V2089	no equivalent	V2489	SR250V-STF	Side Transition Fitting (to 300 & 400)

T&B Surface Raceway Systems

Multi-outlet Strip Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Length/Circuit	Description Outlet Spacing	# of Outlets	Mono Systems Cat. No.
Ivory Finish					
Pluggers Multi-outlet Strips - 15A Single Circuit					
V20GB306	SC306V	3' Single Ckt	6" O.C.	6 outlets	19GB306
V20GB506	SC506V	5' Single Ckt	6" O.C.	10 outlets	19GB506
V20GB512	SC512V	5' Single Ckt	12" O.C.	5 outlets	19GB512
V20GB606	SC606V	6' Single Ckt	6" O.C.	12 outlets	19GB606
V20GB609	SC609V	6' Single Ckt	9" O.C.	8 outlets	19GB609
V20GB612	SC612V	6' Single Ckt	12" O.C.	6 outlets	19GB612
V20GB618	SC618V	6' Single Ckt	18" O.C.	4 outlets	19GB618
Gray Finish					
G20GB306	SC306G	3' Single Ckt	6" O.C.	6 outlets	no equivalent
G20GB506	SC506G	5' Single Ckt	6" O.C.	10 outlets	no equivalent
G20GB512	SC512G	5' Single Ckt	12" O.C.	5 outlets	no equivalent
G20GB606	SC606G	6' Single Ckt	6" O.C.	12 outlets	no equivalent
G20GB609	SC609G	6' Single Ckt	9" O.C.	8 outlets	no equivalent
G20GB612	SC612G	6' Single Ckt	12" O.C.	6 outlets	no equivalent
G20GB618	SC618G	6' Single Ckt	18" O.C.	4 outlets	no equivalent
Ivory Finish					
Pluggers Multi-outlet Strips - 15A Two Circuit					
V20GBA512	DC512V	5' 2 Ckt	12" O.C.	5 outlets	19GBA512
V20GBA609	DC609V	6' 2 Ckt	9" O.C.	8 outlets	19GBA609
V20GBA612	DC612V	6' 2 Ckt	12" O.C.	6 outlets	19GBA612
V20GBA618	DC618V	6' 2 Ckt	18" O.C.	4 outlets	19GBA618
Gray Finish					
G20GBA512	DC512G	5' 2 Ckt	12" O.C.	5 outlets	no equivalent
G20GBA609	DC609G	6' 2 Ckt	9" O.C.	8 outlets	no equivalent
G20GBA612	DC612G	6' 2 Ckt	12" O.C.	6 outlets	no equivalent
G20GBA618	DC618G	6' 2 Ckt	18" O.C.	4 outlets	no equivalent
Ivory Finish					
Pluggers Multi-outlet Strips - 15A Single Circuit Isolated Ground					
V20IG306	SCIG306V	3' IG Ckt	6" O.C.	6 outlets	19IG306
V20IG512	SCIG512V	5' IG Ckt	12" O.C.	5 outlets	19IG512
V20IG606	SCIG606V	6' IG Ckt	6" O.C.	12 outlets	19IG606
no equivalent	SCIG612V	6' IG Ckt	12" O.C.	6 outlets	no equivalent
V20IG618	SCIG618V	6' IG Ckt	18" O.C.	4 outlets	19IG618
Gray Finish					
G20IG306	SCIG306G	3' IG Ckt	6" O.C.	6 outlets	no equivalent
G20IG512	SCIG512G	5' IG Ckt	12" O.C.	5 outlets	no equivalent
G20IG606	SCIG606G	6' IG Ckt	6" O.C.	12 outlets	no equivalent
no equivalent	SCIG612G	6' IG Ckt	12" O.C.	6 outlets	no equivalent
G20IG618	SCIG618G	6' IG Ckt	18" O.C.	4 outlets	no equivalent
Ivory Finish					
Cord-Ended Outlet Strips					
V20-C2**	SR250-3	3 ft.	6" O.C.	6 outlets	no equivalent
no equivalent	SR250-4	4 ft.	6" O.C.	8 outlets	no equivalent
V20-C3**	SR250-5	5 ft.	6" O.C.	10 outlets	no equivalent
V20-C4**	SR250-6	6 ft.	6" O.C.	12 outlets	no equivalent

** Wiremold units have 6 outlets without switches.

T&B Surface Raceway Systems

Two-Piece Surface Raceway Cross Reference – Single Channel

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Mono Systems Cat. No.
Raceway Base & Cover		Gray Finish	
G3000B	SR500-BSE	Single Compartment Raceway - Base	SMS3200
G3000CE	SR500-C5FT	Single Compartment Raceway - Cover	SMS3203
no equivalent	SR500-C12	7.5" Blank Cover	no equivalent
no equivalent	SR500-C18	13.5" Blank Cover	no equivalent
no equivalent	SR500-C24	19.5" Blank Cover	no equivalent
no equivalent	SR500-C36	31.5" Blank Cover	no equivalent
Raceway Fittings		Gray Finish	
G3000WC	SR500-WR	Wire Retainer	SMS3206
G3001	SR500-C	Raceway Coupling	SMS3202
G3010AE	SR500-EF	End Feed Fitting (½" & ¾" conc. KO)	SMS3205
G3010B	SR500-EC	End Blank Fitting	SMS3204
G3011E	SR500-FL	90 Deg Flat Elbow	SMS3209
no equivalent	SR500-FL45	45 Deg Flat Elbow	no equivalent
G3014C	SR500-BF	Raceway Back Feed	SMS3230
G3015E	SR500-T	Tee	SMS3210
G3017TCE	SR500-IL	90 Deg Internal Elbow	SMS3214
no equivalent	SR500-IL45	45 Deg Internal Elbow	no equivalent
G3018AE	SR500-EL	90 Deg External Elbow	SMS3218
no equivalent	SR500-EL45	45 Deg External Elbow	no equivalent
G3027AE	SR500P-S	Single Receptacle Device Plate (1.40" dia.)	no equivalent
G3033JE	SR500P-H	Single Receptacle Device Plate (1.58" dia.)	SMS3245
G3036HE	SR500P-C	Blank Device Plate with ⅞" K.O.	no equivalent
G3036HE	SR500P-B	Blank Device Plate	SMS3253
G3040CE	SR500P-W	Switch Cover	SMS3248
G3043BE	SR500P-D	Duplex Device Plate	SMS3246
G3046BE	SR500P-D	Duplex Device Plate	SMS3246
G3048R	SR500P-G	Decora Device Plate	SMS3223
G3051LE	SR500P-L	Extension Cover (accepts single gang plates)	no equivalent
G3086A	SR500-PF	Raceway Panel Flange	SMS3286
no equivalent	SR500P-T	Telephone Device Plate	no equivalent
Raceway Base & Cover		Ivory Finish	
V3000B	SR500V-BSE	Single Compartment Raceway - Base	SMS3200-I
V3000CE	SR500V-C5FT	Single Compartment Raceway - Cover	SMS3203-I
no equivalent	SR500V-C12	7.5" Blank Cover	no equivalent
no equivalent	SR500V-C18	13.5" Blank Cover	no equivalent
no equivalent	SR500V-C24	19.5" Blank Cover	no equivalent
no equivalent	SR500V-C36	31.5" Blank Cover	no equivalent
Raceway Fittings		Ivory Finish	
G3001 (not typo)	SR500V-C	Raceway Coupling	SMS3202-I
V3010AE	SR500V-EF	End Feed Fitting (½" & ¾" conc. KO) - Ivory	SMS3205-I
V3010B	SR500V-EC	End Blank Fitting - Ivory	SMS3204-I
V3011E	SR500V-FL	90 Deg Flat Elbow - Ivory	SMS3209-I
no equivalent	SR500V-FL45	45 Deg Flat Elbow - Ivory	no equivalent
V3014C	SR500V-BF	Raceway Back Feed - Ivory	SMS3230-I
V3015E	SR500V-T	Tee - Ivory	SMS3210-I
V3017TCE	SR500V-IL	90 Deg Internal Elbow - Ivory	SMS3214-I
no equivalent	SR500V-IL45	45 Deg Internal Elbow - Ivory	no equivalent
V3018AE	SR500V-EL	90 Deg External Elbow - Ivory	SMS3218-I
no equivalent	SR500V-EL45	45 Deg External Elbow - Ivory	no equivalent
V3027AE	SR500VP-S	Single Receptacle Device Plate (1.40" dia.) - Ivory	no equivalent
V3033JE	SR500VP-H	Single Receptacle Device Plate (1.58" dia.) - Ivory	no equivalent
V3036HE	SR500VP-B	Blank Device Plate - Ivory	SMS3245-I
V3036HE	SR500VP-C	Device Plate with ⅞" K.O. - Ivory	no equivalent
V3040CE	SR500VP-W	Switch Cover - Ivory	SMS3253-I
V3043BE	SR500VP-D	Duplex Device Plate - Ivory	SMS3248-I
V3046BE	SR500VP-D	Duplex Device Plate - Ivory	SMS3246-I
V3048R	SR500VP-G	Decora Device Plate - Ivory	SMS3246-I
V3051LE	SR500VP-L	Extension Cover (accepts single gang plates) - Ivory	SMS3223-I
V3086A	SR500VP-PF	Raceway Panel Flange - Ivory	no equivalent
no equivalent	SR500VP-T	Telephone Device Plate - Ivory	SMS3286-I

T&B Surface Raceway Systems

Two-Piece Surface Metal Raceway Cross Reference – Multiple Channel

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Mono Systems Cat. No.
Raceway Base & Cover*		Gray Finish	
G4000B-10	SR600-BSE	Single Compartment Raceway - Base	SMS4200
G4000C	SR600-C5FT	Single Compartment Raceway - Cover	SMS4203
-	SR600B-BSE	Two Compartment Raceway - Base w/ barrier	-
G4000D	Included in SR600B-BSE	Raceway Divider	SMS4207
G4000C075	SR600-C12	7.5" Blank Cover	SMS4261
G4000C135	SR600-C18	13.5" Blank Cover	SMS4263
G4000C195	SR600-C24	19.5" Blank Cover	SMS4265
G4000C315	SR600-C36	31.5" Blank Cover	SMS4267
* For divided raceway applications:			
Wiremold	T&B		
G4000B	SR600B-BSE	Base - Gray	SMS4200
G4000D	Not needed (in base)	Divider	SMS4207
G40001D	Not needed	Divider Coupling	SMS4201
	(one per 2.5 ft. of base)		
Raceway Fittings		Gray Finish	
G4000WC	SR600-WR	Wire Retainer	SMS4206
G4001	SR600-C	Raceway Coupling	SMS4202
G4001D	Not needed	Divider Clip	SMS4201
G4007C-1	SR600P-L	One-Gang Device Plate (for single gang face plate)	1 Gang Universal
G4007C-2	SR600P-LL	Two-Gang Device Plate (for two-gang face plate)	2 Gang Universal
G4010B	SR600-EC	End Blank Fitting	SMS4204
G4010D	SR600-EF	End Feed Fitting	SMS4205
G4011	SR600-FL	90 Deg Flat Elbow	SMS4209
G4011	SR600B-FL	90 Deg Flat Elbow w/barrier	SMS4209
no equivalent	SR600-FL45	45 Deg Flat Elbow	no equivalent
no equivalent	SR600B-FL45	45 Deg Flat Elbow w/barrier	no equivalent
G4012TX	SR600-EL45	45 Deg External Elbow	SMS4215
G4012TX	SR600-IL45	45 Deg Internal Elbow	SMS4215
G4012TX	SR600B-EL45	45 Deg External Elbow w/barrier	SMS4215
G4012TX	SR600B-IL45	45 Deg Internal Elbow w/barrier	SMS4215
G4014A	SR600-BF	Back Feed Fitting	SMS4230
G4015	SR600-T	Tee	SMS4210
G4015D	SR600B-T	Divided Tee	SMS4211
G4017	SR600-IL	90 Deg Internal Elbow	SMS4214
G4017	SR600B-IL	90 Deg Internal Elbow w/barrier	SMS4214
G4018	SR600-EL	90 Deg External Elbow	SMS4218
G4018	SR600B-EL	90 Deg External Elbow w/barrier	SMS4218
G4046A	SR600P-SC	Single Recep (1.40" Dia) / Grommated Tele	SMS4245
G4046B	SR600P-DC	Duplex Rcpt. / Grommated Tele Device Plate	SMS4246
G4046B-2	SR600P-DD	Double Duplex Device Plate	SMS4049
G4046J	SR600P-HC	Single Recep (1.59" Dia) / Grommated Tele	no equivalent
G4046T	SR600P-C	Blank / Grommated Telephone	SMS4243
G4048B	SR600P-D	Duplex Device Plate	SMS4260
G4048R	SR600P-G	Decora Device Plate	SMS4281
G4086A	SR600-PF	Panel Flange Fitting	SMS4286
no equivalent	SR600P-B	Blank Plate	no equivalent
no equivalent	SR600P-DT	Duplex Rcpt. / Modular Jack Opening	no equivalent
no equivalent	SR600P-DTT	Duplex Rcpt. / (2) Modular Jack Openings	no equivalent
no equivalent	SR600P-GG	Double Decora Device Plate	no equivalent
no equivalent	SR600P-T	Single Modular Jack Plate	no equivalent

T&B Surface Raceway Systems

Two-Piece Surface Metal Raceway Cross Reference – Multiple Channel

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Mono Systems Cat. No.
Raceway Base & Cover*		Ivory Finish	
V4000B-10	SR600V-BSE	Single Compartment Raceway - Base	SMS4200-I
V4000C	SR600V-C5FT	Single Compartment Raceway - Cover	SMS4203-I
-	SR600VB-BSE	Two Channel Raceway - Base w/ barrier	-
G4000D	Included in SR600VB-BSE	Raceway Divider	SMS4207-I
V4000C075	SR600V-C12	7.5" Blank Cover	SMS4261-I
V4000C135	SR600V-C18	13.5" Blank Cover	SMS4263-I
V4000C195	SR600V-C24	19.5" Blank Cover	SMS4265-I
V4000C315	SR600V-C36	31.5" Blank Cover	SMS4267-I
* For divided raceway applications:			
Wiremold	T&B		
V4000B	SR600VB-BSE	Base - Ivory	SMS4200-I
G4000D	Not needed (in base)	Divider	SMS4207-I
G40001D	Not needed	Divider Coupling (one per 2.5 ft. of base)	SMS4201-I
Raceway Fittings		Ivory Finish	
G4000WC	SR600-WR	Wire Retainer - Galvanized	SMS4206-I
G4001	SR600V-C	Raceway Coupling	SMS4202-I
V4007C-1	SR600VP-L	One-Gang Device Plate (for single gang face plate)	1 Gang Universal
V4007C-2	SR600VP-LL	Two-Gang Device Plate (for two-gang face plate)	2 Gang Universal
V4010B	SR600V-EC	End Blank Fitting	SMS4204-I
V4010D	SR600V-EF	End Feed Fitting (½" & ¾" conc. KO)	SMS4205-I
V4011	SR600V-FL	90 Deg Flat Elbow	SMS4209-I
V4011	SR600VB-FL	90 Deg Flat Elbow w/barrier	SMS4209-I
no equivalent	SR600V-FL45	45 Deg Flat Elbow	no equivalent
no equivalent	SR600VB-FL45	45 Deg Flat Elbow w/barrier	no equivalent
V4012TX	SR600V-EL45	45 Deg External Elbow	SMS4215-I
V4012TX	SR600V-IL45	45 Deg Internal Elbow	SMS4215-I
V4012TX	SR600VB-EL45	45 Deg External Elbow w/barrier	SMS4215-I
V4012TX	SR600VB-IL45	45 Deg Internal Elbow w/barrier	SMS4215-I
V4014A	SR600V-BF	Back Feed Fitting	SMS4230-I
V4015	SR600V-T	Tee	SMS4210-I
V4015D	SR600VB-T	Divided Tee	SMS4211-I
V4017	SR600V-IL	90 Deg Internal Elbow	SMS4214-I
V4017	SR600VB-IL	90 Deg Internal Elbow w/barrier	SMS4214-I
V4018	SR600V-EL	90 Deg External Elbow	SMS4218-I
V4018	SR600VB-EL	90 Deg External Elbow w/barrier	SMS4218-I
V4046A	SR600VP-SC	Single Recep (1.40" Dia) / Grommeted Tele	SMS4245-I
V4046B	SR600VP-DC	Duplex Rcpt. / Grommeted Tele Device Plate	SMS4246-I
V4046B-2	SR600VP-DD	Double Duplex Device Plate	SMS4049-I
V4046J	SR600VP-HC	Single Recep (1.59" Dia) / Grommeted Tele	no equivalent
V4046T	SR600VP-C	Blank / Grommeted Telephone	SMS4243-I
V4048B	SR600VP-D	Duplex Device Plate	SMS4260-I
V4048R	SR600VP-G	Decora Device Plate	SMS4281-I
V4086A	SR600V-PF	Panel Flange Fitting	SMS4286-I
no equivalent	SR600VP-B	Blank Plate	no equivalent
no equivalent	SR600VP-DT	Duplex Rcpt. / Modular Jack Opening	no equivalent
no equivalent	SR600VP-DDT	Duplex Rcpt. / (2) Modular Jack Opening	no equivalent
no equivalent	SR600VP-GG	Double Decora Device Plate	no equivalent
no equivalent	SR600VP-T	Single Modular Jack Plate	no equivalent

T&B Surface Raceway Systems

Two-Piece Surface Metal Raceway Cross Reference – Multiple Channel

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Mono Systems Cat. No.
Raceway Base & Cover*		Gray Finish	
G6000B-10	SR700-BSE	Single Compartment Raceway - Base	SMS4400
G6000C	SR600-C5FT	Single Compartment Raceway - Cover	SMS4203
-	SR700B-BSE	Two Compartment Raceway - Base w/barrier	-
G4000C075	SR600-C12	7.5" Blank Cover	SMS4261
G4000C135	SR600-C18	13.5" Blank Cover	SMS4263
G4000C195	SR600-C24	19.5" Blank Cover	SMS4265
G4000C315	SR600-C36	31.5" Blank Cover	SMS4267
G6000D	Included in SR700B-BSE	Raceway Divider (Field installed)	SMS4407
* For divided raceway applications:			
Wiremold	T&B		
G6000B-10	SR700B-BSE	Base - Gray	SMS4400
G6000D	Not needed (in base)	Divider	SMS4407
G60001D	Not needed	Divider Clip (one per 2.5 ft of base)	SMS4401
Raceway Fittings		Gray Finish	
no equivalent	SR700-EF	Raceway End Feed	SMS4405
G6000WC	SR700-WR	Wire Retainer	SMS4406
G6001	SR700-C	Raceway Coupling	SMS4402
G6001D	Not needed	Divider Clip (½)	SMS4401
G6010B	SR700-EC	Raceway End Blank	SMS4404
G6011TX	SR700-FL	90 Deg Flat Elbow	SMS4409
G6011TX	SR700B-FL	90 Deg Flat Elbow w/ barrier	SMS4409
no equivalent	SR700-FL45	45 Deg Flat Elbow	no equivalent
G6012TX	SR700-EL45	45 Deg External Elbow	SMS4415
G6012TX	SR700-IL45	45 Deg Internal Elbow	SMS4415
G6014A	SR700-BF	Raceway Back Feed	SMS4430
G6017TX	SR700-EL	90 Deg External Elbow	SMS4418
G6017TX	SR700B-EL	90 Deg External Elbow w/ barrier	SMS4418
G6017TX	SR700-IL	90 Deg Internal Elbow	SMS4414
G6017TX	SR700B-IL	90 Deg Internal Elbow w/barrier	SMS4414
no equivalent	SR700-T	Tee	SMS4410
no equivalent	SR700B-T	Tee w/ barrier	SMS4411
G6086	SR700-PF	Raceway Panel Flange	SMS4486
Device Plates**		Gray Finish	
G4007C-1	SR600P-L	One-Gang Device Plate (for single gang face plate)	1 Gang Universal
G4007C-2	SR600P-LL	Two-Gang Device Plate (for two-gang face plate)	2 Gang Universal
G4046A	SR600P-SC	Single Recep (1.40" Dia) / Grommeted Tele	SMS4245
G4046B	SR600P-DC	Duplex Rcpt. / Grommeted Tele Device Plate	SMS4246
G4046B-2	SR600P-DD	Double Duplex Device Plate	SMS4249
G4046J	SR600P-HC	Single Recep (1.59" Dia) / Grommeted Tele	no equivalent
G4046T	SR600P-C	Blank / Grommeted Telephone	SMS4243
G4048B	SR600P-D	Duplex Device Plate	SMS4260
G4048R	SR600P-G	Decora Device Plate	SMS4281
no equivalent	SR600P-B	Blank Plate	no equivalent
no equivalent	SR600P-DT	Duplex Rcpt. / Modular Jack Opening	no equivalent
no equivalent	SR600P-DTT	Duplex Rcpt. / (2) Modular Jack Openings	no equivalent
no equivalent	SR600P-GG	Double Decora Device Plate	no equivalent
no equivalent	SR600P-T	Single Modular Jack Plate	no equivalent

** Uses same device plates as SR600 Series.

T&B Surface Raceway Systems

Two-Piece Surface Metal Raceway Comparison – Multiple Channel

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Mono Systems Cat. No.
Raceway Base & Cover*		Ivory Finish	
V6000B-10	SR700V-BSE	Single Compartment Raceway - Base	SMS4400-I
V6000C	SR600V-C5FT	Single Compartment Raceway - Cover	SMS4203-I
-	SR700VB-BSE	Two Compartment Raceway - Base	-
V4000C075	SR600V-C12	7.5" Blank Cover	SMS4261-I
V4000C135	SR600V-C18	13.5" Blank Cover	SMS4263-I
V4000C195	SR600V-C24	19.5" Blank Cover	SMS4265-I
V4000C315	SR600V-C36	31.5" Blank Cover	SMS4267-I
* For divided raceway applications:			
Wiremold	T&B		
V6000B-10	SR700VB-BSE	Base - Ivory	SMS4400-I
G6000D	Not needed (in base)	Divider	SMS4407
G60001D	Not needed (one per 2.5 ft.of base)	Divider Coupling	SMS4401
Raceway Fittings		Ivory Finish	
G6001 (not typo)	SR700V-C	Raceway Coupling	SMS4402-I
no equivalent	SR700V-EF	Raceway End Feed	SMS4405-I
V6010B	SR700V-EC	Raceway End Blank	SMS4404-I
V6011TX	SR700V-FL	90 Deg Flat Elbow	SMS4409-I
V6011TX	SR700VB-FL	90 Deg Flat Elbow w/ barrier	SMS4409-I
no equivalent	SR700V-FL45	45 Deg Flat Elbow	no equivalent
V6012TX	SR700V-EL45	45 Deg External Elbow	SMS4415-I
V6012TX	SR700V-IL45	45 Deg Internal Elbow	SMS4415-I
V6014A	SR700V-BF	Raceway Back Feed	SMS4430-I
V6017TX	SR700V-EL	90 Deg External Elbow	SMS4418-I
V6017TX	SR700VB-EL	90 Deg External Elbow w/ barrier	SMS4418-I
V6017TX	SR700V-IL	90 Deg Internal Elbow	SMS4414-I
V6017TX	SR700VB-IL	90 Deg Internal Elbow w/ barrier	SMS4414-I
no equivalent	SR700V-T	Tee	SMS4410-I
no equivalent	SR700VB-T	Tee w/ barrier	SMS4411-I
V6086	SR700V-PF	Raceway Panel Flange	SMS4486-I
Device Plates**		Ivory Finish	
V4007C-1	SR600VP-L	One-Gang Device Plate (for single gang face plate)	1 Gang Universal
V4007C-2	SR600VP-LL	Two-Gang Device Plate (for two-gang face plate)	2 Gang Universal
V4046A	SR600VP-SC	Single Recep (1.40" Dia) / Grommeted Tele	SMS4245-I
V4046B	SR600VP-DC	Duplex Rcpt. / Grommeted Tele Device Plate	SMS4246-I
V4046B-2	SR600VP-DD	Double Duplex Device Plate	SMS4249-I
V4046J	SR600VP-HC	Single Recep (1.59" Dia) / Grommeted Tele	no equivalent
V4046T	SR600VP-C	Blank / Grommeted Telephone	SMS4243-I
V4048B	SR600VP-D	Duplex Device Plate	SMS4260-I
V4048R	SR600VP-G	Decora Device Plate	SMS4281-I
no equivalent	SR600VP-B	Blank Plate	no equivalent
no equivalent	SR600VP-DT	Duplex Rcpt. / Modular Jack Opening	no equivalent
no equivalent	SR600VP-DTT	Duplex Rcpt. / (2) Modular Jack Openings	no equivalent
no equivalent	SR600VP-GG	Double Decora Device Plate	no equivalent
no equivalent	SR600VP-T	Single Modular Jack Plate	no equivalent

**Uses same device plates as SR600 Series.

T&B Surface Raceway Systems

Two-Piece Surface Metal Raceway Cross Reference – Multiple Channel

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Mono Systems Cat. No.
Raceway Base & Cover - Gray			
-	SR800-BSE	Three Compartment Raceway - Base w/ Dividers	-
-	SR800-C5FT	Three Compartment Raceway - Cover	-
Raceway Fittings - Gray			
-	SR800-BF	Back Feed Fitting	-
-	SR800-C	Raceway Coupling	-
-	SR800-EC	End Blank Fitting	-
-	SR800-EF	End Feed Fitting	-
-	SR800-EL	90 Deg External Elbow	-
-	SR800-EL45	45 Deg External Elbow	-
-	SR800-FL	90 Deg Flat Elbow	-
-	SR800-FL45	45 Deg Flat Elbow	-
-	SR800-IL	90 Deg Internal Elbow	-
-	SR800-IL45	45 Deg Internal Elbow	-
-	SR800-PF	Panel Flange	-
-	SR800-T	Tee	-
-	SR800-WR	Wire Retainer	-
-	SR800P-DDD	Triple Duplex Plate	-
-	SR800P-DTD	Double Duplex w/ Single RJ45 Jack Opening	-
-	SR800P-GGG	Triple Decora Plate	-
-	SR800P-GTG	Double Decora w/ Single RJ45 Jack Opening	-
Raceway Base & Cover - Ivory			
-	SR800V-BSE	Three Compartment Raceway - Base w/ Dividers	-
-	SR800V-C5FT	Three Compartment Raceway - Cover	-
Raceway Fittings - Ivory			
-	SR800V-BF	Back Feed Fitting	-
-	SR800V-C	Raceway Coupling	-
-	SR800V-EC	End Blank Fitting	-
-	SR800V-EF	End Feed Fitting	-
-	SR800V-EL	90 Deg External Elbow	-
-	SR800V-EL45	45 Deg External Elbow	-
-	SR800V-FL	90 Deg Flat Elbow	-
-	SR800V-FL45	45 Deg Flat Elbow	-
-	SR800V-IL	90 Deg Internal Elbow	-
-	SR800V-IL45	45 Deg Internal Elbow	-
-	SR800V-PF	Panel Flange	-
-	SR800V-T	Tee	-
-	SR800VP-DDD	Triple Duplex Plate	-
-	SR800VP-DTD	Double Duplex w/ Single RJ45 Jack Opening	-
-	SR800VP-GGG	Triple Decora Plate	-
-	SR800VP-GTG	Double Decora w/ Single RJ45 Jack Opening	-

T&B Surface Raceway Systems

Latching-style Surface Nonmetallic Raceway Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Panduit Cat. No.	Panduit Cat. No.
Low Volt. Only	Power & Low Voltage		Low Volt. Only	Power & Low Voltage
(0.1629 sq. in.) 2700 no equivalent	(0.1591 sq. in.) SR50-LD SR50-LDCB	SR50 Series Duct Latching Duct w/ adhesive Latching Duct - adhesive for Cinder Block	(0.1883 sq. in.) LD3IW6-A no equivalent	LDP3IW6-A no equivalent
2706 no equivalent 2711 2717 2718 2715 2710B 2786	SR50 Series Fittings SR50-SC SR50-WR SR50-FL SR50-IL SR50-EL SR50-T SR50-EC SR50-CF	Splice Cover Wire Retainer 90 Deg Horizontal Elbow Internal 90 Deg Elbow External 90 Deg Elbow Tee Cover End Cap Drop Ceiling Fitting	CF3IW-E no equivalent RAF3IW-E ICF3IW-E OCF3IW-E TF3IW-E ECF3IW-E DCF3IW-X	CFX3IW-X no equivalent RAFX3IW-X ICFX3IW-X OCFX3IW-X TFX3IW-X ECFX3IW-X DCEFXIW-X
(0.3364 sq. in.) 2800 no equivalent no equivalent	(0.84 sq. in.) SR100-LD SR100-LDCB SR100-CT	SR100 Series Duct Latching Duct w/ adhesive Latching Duct - adhesive for Cinder Block Center Track	(0.3399 sq. in.) LD5IW6-A no equivalent no equivalent	LDP5IW-6A no equivalent no equivalent
no equivalent 2810B 2806 2811 2811FO 2817 2817FO 2818 2818FO 2815 2815FO no equivalent no equivalent 2886 no equivalent 2889	SR100-WR SR100-EC SR100-SC SR100-FL SR100-HLF SR100-IL SR100-ILF SR100-EL SR100-ELF SR100-T SR100-TCF SR100-TR SR100-BA SR100-CF SR100-GC SR100-RC	SR100 Series Fittings Wire Retainer End Cap Splice Cover 90 Deg Horizontal Elbow 90 Deg Horizontal Elbow - Cat 5 / Fiber Internal 90 Deg Elbow Internal 90 Deg Elbow - Cat 5 / Fiber External 90 Deg Elbow External 90 Deg Elbow - Cat 5 / Fiber Tee Cover Tee Cover - Cat 5 / Fiber Tee Cover with Reducer Outlet Box Adapter Drop Ceiling Fitting Greenfield Connector / Entrance End Fitting Reducer Cap	no equivalent ECF5IW-E CF5IW-E RAF5IW-E RAFC5IW-E ICF5IW-E ICFC5IW-E OCF5IW-E OCFC5IW-E TF5IW-E TFC5IW-X no equivalent no equivalent DCF5IW-X no equivalent RF5X3IW-E	no equivalent ECFX5IW-X CFX5IW-X RAFX5IW-X RAFX5IW-X ICFX5IW-X ICFX5IW-X OCFX5IW-X OCFX5IW-X TFX5IW-X TFX5IW-X no equivalent no equivalent DCEFXIW-X no equivalent RFX53IW-X
(0.8685 sq. in.) 2900 no equivalent	(0.84 sq. in.) SR100-LD SR100-LDCB	Large Series Duct Latching Duct w/ adhesive Latching Duct - adhesive for Cinder Block	(0.9961 sq. in.) LD10IW6-A no equivalent	(0.9760 sq. in.) LDP10IW6-A no equivalent
2910B 2906 2911 2911FO 2917 2917FO 2918 2918FO 2915 2915FO 2986 2989 2989A no equivalent	SR100-EC SR100-SC SR100-FL SR100-HLF SR100-IL SR100-ILF SR100-EL SR100-ELF SR100-T SR100-TCF SR100-CF SR100-RC not needed no equivalent	Large Series Fittings End Cap Splice Cover 90 Deg Horizontal Elbow Cat 5 Right Elbow Internal 90 Deg Elbow Cat 5 Inside Elbow External 90 Deg Elbow Cat 5 Outside Elbow Tee Cover Cat 5 Tee Drop Ceiling Fitting Reducer Cap Reducer Cap Right Angle Entrance End Fitting	ECF10IW-X CF10IW-X RAF10IW-X RAFC10IW-X ICF10IW-X ICFC10IW-X OCF10IW-X OCFC10IW-X TF10IW-X TFC10IW-X DCF10IW-X RF10X5IW-E RF10X3IW-X RAEFXIW-X	ECFX10IW-X CFX10IW-X RAFX10IW-X RAFX10IW-X ICFX10IW-X ICFX10IW-X OCFX10IW-X OCFX10IW-X TFX10IW-X TFX10IW-X DCEFXIW-X RFX105IW-X RFX103IW-X RAEFXIW-X

T&B Surface Raceway Systems

Latching-style Surface Nonmetallic Raceway Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Panduit Cat. No.
Device Boxes (for Both Systems)			
no equivalent	SRJB-1	Junction Box - 1" D.	no equivalent
no equivalent	SRJB-600V-1	Junction Box for 600V Applications - 1" D.	no equivalent
no equivalent	SRJB-11/2	Junction Box - 1.5 D.	JB1IW-A
no equivalent	no equivalent	Two Gang Junction Box - 1.5" D.	JBX3510IW-2G
2948	SRJB-2	Deep Junction Box - 2" D.	no equivalent
2948-2	SRJB-2G-2	Deep Two Gang Junction Box - 2" D.	no equivalent
2944	no equivalent	Extra Deep Junction Box - 2¾" D.	JB1DIW-A
no equivalent	SRJB-1R	Round Junction Box - 1 D., 5½" dia.	RJBX3510IW

T&B Surface Raceway Systems

Small Two-Piece Surface Nonmetallic Raceway Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Panduit Cat. No.
(0.13 sq. in.) 400BC 400BAC no equivalent	(0.1591 sq. in.) no equivalent SR50-TP SR50-TPCB	SR50 Series Duct Two Piece System Two Piece System w/ adhesive Two Piece System - adhesive for Cinder Block	(0.1401 sq. in.) PD3IW6 PD3IW6-A no equivalent
406 400WC 411 417 418 415 410B no equivalent	SR50-SC SR50-WR SR50-FL SR50-IL SR50-EL SR50-T SR50-EC SR50-CF	SR50 Series Fittings Splice Cover Wire Retainer 90 Deg Horizontal Elbow Internal 90 Deg Elbow External 90 Deg Elbow Tee Cover End Cap Drop Ceiling Fitting	PCF3IW-X no equivalent PRAF3IW-X PICF3IW-X POCF3IW-X PTF3IW-X PECF3IW-X DCEF3IW-X
(0.272 sq. in.) 800BC 800BAC no equivalent no equivalent	(0.84 sq. in.) no equivalent SR100-TP SR100-TPCB SR100-CT	SR100 Series Duct Two Piece System Two Piece System w/ adhesive Two Piece System - adhesive for Cinder Block Center Track	(0.3303 sq. in.) PD6IW6 PD6IW6-A no equivalent no equivalent
800WC 810B 806 811 no equivalent 817 no equivalent 818 no equivalent 815 no equivalent no equivalent no equivalent no equivalent 810A1 889A	SR100-WR SR100-EC SR100-SC SR100-FL SR100-HLF SR100-IL SR100-ILF SR100-EL SR100-ELF SR100-T SR100-TCF SR100-TR SR100-BA SR100-CF SR100-GC SR100-RC	SR100 Series Fittings Wire Retainer End Cap Splice Cover 90 Deg Horizontal Elbow 90 Deg Horizontal Elbow - Cat 5 / Fiber Internal 90 Deg Elbow Internal 90 Deg Elbow - Cat 5 / Fiber External 90 Deg Elbow External 90 Deg Elbow - Cat 5 / Fiber Tee Cover Tee Cover - Cat 5 / Fiber Tee Cover with Reducer Outlet Box Adapter Drop Ceiling Fitting Greenfield Connector / Entrance End Fitting Reducer Cap	PWR6-X PECF6IW-X PCF6IW-X PRAF6IW-X no equivalent PICF6IW-X no equivalent POCF6IW-X no equivalent PTF6IW-X no equivalent no equivalent no equivalent DCEF3IW-X PEEF36IW-X no equivalent
(0.852 sq. in.) 2300BC 2300BAC	(0.84 sq. in.) no equivalent SR100-TP	Large Series Duct Two Piece System Two Piece System - for Cinder Block Use	no equivalent no equivalent
2300WC 2306 2310A 2310B 2311 no equivalent 2315 no equivalent 2317 no equivalent 2318 no equivalent 2389 2389A	SR100-WR SR100-SC SR100-GC SR100-EC SR100-FL SR100-HLF SR100-T SR100-TF SR100-IL SR100-ILF SR100-EL SR100-ELF SR100-RC not needed	Large Series Fittings Wire Retainer Splice Cover Greenfield Connector / Entrance End Fitting End Cap 90 Deg Horizontal Elbow 90 Deg Horizontal Elbow - Cat. 5/Fiber Tee Cover Tee Cover - Cat. 5/Fiber Internal 90 Deg Elbow Internal 90 Deg Elbow - Cat. 5/Fiber External 90 Deg Elbow External 90 Deg Elbow - Cat. 5/Fiber Reducer Cap Reducer Cap	no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent no equivalent

T&B Surface Raceway Systems

Small Two-Piece Surface Nonmetallic Raceway Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Panduit Cat. No.
Device Boxes (for Both Systems)			
2348S / 51	SRJB-1	Junction Box - 1" D.	no equivalent
2348S / 51	SRJB-600V-1	Junction Box for 600V Applications - 1" D.	no equivalent
2347	SRJB-11/2	Junction Box - 1.5" D.	PJBX36IW
2347-2	no equivalent	Two Gang Junction Box - 1.5" D.	PJBX36IW-2G
2348	SRJB-2	Deep Junction Box - 2" D.	no equivalent
2348-2	SRJB-2G-2	Deep Two Gang Junction Box - 2" D.	no equivalent
2338A	SRJB-1R	Round Junction Box - 1 D., 5½" dia.	PRJBX36IW

T&B Surface Raceway Systems

Large Two-Piece Surface Nonmetallic Raceway Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description	Panduit Cat. No.
Raceway			
5400TB	NM600BSE	Raceway Base	T702BIW8
5400C	NM600-C8FT	Raceway Cover - 8 ft.	no equivalent
5400TC	NM600-TC8FT	Raceway Twin Cover - 8 ft.	T70CIW8
no equivalent	NM600D	Raceway Divider	T70DW8
Raceway Fittings			
5400TWC	NM600TWR	Twin Wire Retainer	T70WR-X
5406A	NM600SC	Splice Cover	no equivalent
5406T	NM600TSC	Twin Splice Cover	T70CCIW-X
5406TB	NM600-BC	Base Splice Cover	T702BCIW-X
5410	NM600-EC	Blank End Cap	T702ECIW
5410D	NM600EF	Entrance End Fitting	T702EEIW
5411FO	NM600FL	Flat Elbow	T702RAIW
5417FO	NM600IL	Internal Elbow	T702ICIW
5418FO	NM600EL	External Elbow	T702OCIW
5415	NM600T	Tee	T702TIW
Raceway Device Brackets & Covers*			
5407T	NM600DB	Single Channel Device Bracket	T70DB-X
5507D	NM600P-D	Duplex Device Cover - Screw-on	CP106IW
5507R	NM600P-G	Rectangular Device Cover - Screw-on	CPGIW
5507T2	NM600P-SC	Single Receptacle (1.4" dia.) Cover	no equivalent
5507T2	NM600P-HC	Single Receptacle (1.6" dia.) Cover	no equivalent
5507SW	NM600P-SW	Switch Cover	no equivalent
5507B	NM600P-B	Blank Cover	no equivalent
5507RJ	Accepts all Omni faceplates	Communication Cover	Accepts standard faceplates
5507AD	no equivalent	Modular Furniture Faceplate	T70PCIW

* T&B and Panduit device brackets accept standard single-gang faceplates.

T&B Surface Raceway Systems

Power Pole Cross Reference

Sorted by Wiremold Catalog Number

Wiremold Cat. No.	T&B Cat. No.	Description
Ivory Power Poles		
25DTP-4	(2" x 2¼") PP102100I	Two Channel Pole, 2-20A duplex rcpts, 10 ft.
25DTP-412	PP102120I	Two Channel Pole, 2-20A duplex rcpts, 12 ft.
25DTP-415	PP102150I	Two Channel Pole, 2-20A duplex rcpts, 15 ft.
25DTP-4D	PP102100I-R1-IG1	Two Channel Pole, 1-20A IG duplex & 1-20A standard duplex, 10 ft.
no equivalent	PP102100I-IG	Two Channel Pole, 2-20A IG duplex, 10 ft.
Anodized Aluminum Power Poles		
AMDTP-4	(2" x 2¼") PP102100A	Two Channel Pole, 2-20A duplex rcpts, 10 ft.
AMDTP-412	PP102120A	Two Channel Pole, 2-20A duplex rcpts, 12 ft.
AMDTP-415	PP102150A	Two Channel Pole, 2-20A duplex rcpts, 15 ft.
AMDTP-4D	PP102100A-R1-IG1	Two Channel Pole, 1-20A IG duplex & 1-20A standard duplex, 10 ft.
no equivalent	PP102100A-IG	Two Channel Pole, 2-20A IG duplex, 10 ft.
Ivory Blank Poles		
25DTC-4	(2" x 2¼") BP102100I	Two Channel Pole, w/out rcpts, 10 ft.
25DTC-412	BP102120I	Two Channel Pole, w/out rcpts, 12 ft.
25DTC-415	BP102150I	Two Channel Pole, w/out rcpts, 15 ft.
Anodized Aluminum Blank Poles		
AMTC-4	(2" x 2¼") BP102100A	Two Channel Pole, w/out rcpts, 10 ft.
AMTC-412	BP102120A	Two Channel Pole, w/out rcpts, 12 ft.
AMTC-415	BP102150A	Two Channel Pole, w/out rcpts, 15 ft.

T&B Surface Raceway Systems

Specifications

Paint Specification for T&B Nonmetallic Surface Raceway

1. Surface Raceway Preparation

Remove any contaminants such as dust, oil, grease, silicones, or other lubricants. It is recommended that all surfaces be cleaned with soap and water or degreasers before paint application.

2. Primer

Although PVC can be painted without priming, a primer often produces better results.

3. Paint

Use water-based latex paint. It is advisable to test paint on a small concealed area to verify appearance and adhesion before painting the entire raceway. For optimum results, use a brush to apply the first coat. Then, spray or roll on the second coat for complete coverage.

WARNING: Do not use solvent-based coatings. These contain aromatic hydrocarbons, which may diminish the physical properties of the PVC surface raceway.

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: B300 / B400 Metallic Surface Raceway

SECTION 1: GENERAL

1.1. SCOPE

This specification covers metallic surface raceway that consists of one-piece raceway, fittings, and device boxes.

1.2 CLASSIFICATIONS

Use metallic surface only as specified in Article 386 of the National Electric Code.

The raceway meets the requirements of UL 5 and CSA C22.2 No. 62

UL File Numbers:

Raceway – E96649

Fittings – E96788

CSA File Number:

Raceway & Fittings – LR95280

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The metallic surface raceway system shall be manufactured by Thomas & Betts.

2.2 MATERIALS

Base & Covers: The cover shall be constructed of 0.036" minimum thickness steel and painted ivory. The base shall be 0.036" minimum thickness galvanized steel.

Fittings: All fitting bases shall be 0.036" minimum thickness galvanized steel, and all covers shall be 0.036" minimum thickness steel painted ivory or gray.

Device Boxes: All device box bases shall be 0.040 minimum thickness galvanized steel, and all covers shall be 0.040" minimum thickness steel painted ivory or gray (fire alarm boxes shall be red).

2.3 COMPONENTS

Raceway: The raceway shall be a one-piece design with a pre-assembled base and cover. The height of the B300 raceway shall be $\frac{1}{2}$ " and the height of the B400 raceway shall be $\frac{2}{3}$ ". The width of both raceways shall be $\frac{3}{4}$ ". The raceway shall be available in 5 ft., 8 ft., and 10 ft. lengths.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover. The fitting covers must overlap the raceway when installed.

Device Boxes: The raceway system shall include device boxes that accept industry standard single and double gang faceplates for power or data activations. Knockouts shall be provided to accept both the B300 and B400 raceways. Device boxes must range from 1 to 6 gangs and from 1" to $2\frac{3}{4}$ " depth. Round fixture support boxes and switch boxes shall be provided. Boxes designed to accept fire alarms must be painted red.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

Thomas & Betts

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: SR250 Metallic Surface Raceway & Multi-Outlet Strips

SECTION 1: GENERAL

1.1. SCOPE

This specification covers a metallic surface raceway and multi-outlet system that consists of raceway base and cover, raceway sections with pre-wired receptacles, raceway sections with pre-wired receptacles and cord, fittings, and boxes.

1.2 CLASSIFICATIONS

Use metallic surface only as specified in Article 386 of the National Electric Code. Use multi-outlet strips as specified in Article 353 of the National Electric Code.

The raceway must meet the requirements of UL 5. The corded multi-outlet strips must meet the requirements of UL 1363.

UL File Numbers:

Raceway – E96649

Fittings – E96788

Corded Multi-Outlet Strips – E206077

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The metallic surface raceway and multi-outlet system shall be manufactured by Thomas & Betts.

2.2 MATERIALS

Base & Covers: The base and cover shall be constructed of 0.040" minimum thickness steel and painted ivory or gray.

Fittings: All fitting bases shall be 0.040" minimum thickness galvanized steel. Fitting covers shall be made from UL94V-0 rated rigid PVC color-matched to the ivory or gray raceway.

Device Boxes: All device box bases shall be 0.040" minimum thickness galvanized steel. Device Box covers shall be 0.040" minimum thickness steel painted ivory or gray.

2.3 COMPONENTS

Base & Covers: The raceway system shall consist of a two-piece base and cover design that snap together without any fasteners. When assembled, the edges of the base and cover must be concealed within the interior of the raceway, leaving a smooth radius along the outside length of the raceway. The height shall be 1½" and the width shall be 1½". The base shall be available in 10 ft. lengths and the cover shall be available in 5 ft. lengths.

Multi-Outlet Strips: The raceway shall be offered with pre-assembled and pre-wired receptacles. The multi-outlet strips shall be available with "pig-tails" ends or with a pre-assembled cord. The receptacles shall be NEMA 5-15R 15 Amp receptacles, color-matched to the raceway cover. Receptacles shall be provided on 6", 9", 12", or 18" centers. "Pig-tail" ended units shall be wired with #12 AWG wires. Cord-ended units shall be wired with #14 AWG wires. The corded unit must include a circuit breaker per UL requirements.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover, and the fitting cover shall overlap the base and cover edges. Splice covers shall be available to hide the base and cover edges when two raceway sections are spliced together. A conduit connector must be available to provide service to the raceway. All fittings shall provide the appropriate bend radius for Cat 5e and fiber optic wiring. A reducing tee fitting shall be available for connection with the B300/B400 raceway system.

Device Boxes: The raceway system shall include device boxes that accept industry standard single and double gang faceplates for power or data activations. Boxes shall be 1¾" deep.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: SR500 Metallic Surface Raceway

SECTION 1: GENERAL

1.1. SCOPE

This specification covers a metallic surface raceway that consists of raceway base and cover, fittings, and device covers.

1.2 CLASSIFICATIONS

Use metallic surface only as specified in Article 386 of the National Electric Code.

The raceway must meet the requirements of UL 5A.

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The metallic surface raceway system shall be provided by Thomas & Betts.

2.2 MATERIALS

Base & Covers: The base shall be constructed of 0.50" minimum thickness steel and the cover shall be constructed of 0.040" minimum thickness steel. Both shall be painted ivory or gray.

Fittings: The fitting bases shall be constructed of 0.50" minimum thickness steel and the covers shall be constructed of 0.040" minimum thickness steel. Both shall be painted ivory or gray.

Device Plates: All device box bases shall be 0.040" minimum thickness steel painted ivory or gray.

2.3 COMPONENTS

Base & Covers: The raceway system shall consist of a two-piece base and cover design that snap together without any fasteners. When assembled, the edges of the base and cover must be concealed within the interior of the raceway, leaving a smooth radius along the outside length of the raceway. The height shall be 1¾" and the width shall be 2¾". The base shall be available in 10 ft. lengths and the cover shall be available in 5 ft. lengths. Precut covers shall be available to install devices on-center without field cutting.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover. A reducing tee fitting shall be available for connection with the SR-250 raceway system.

Device Plates: A complete offering of device plates of electrical and data communications wiring shall be provided.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: SR600 Metallic Surface Raceway

SECTION 1: GENERAL

1.1. SCOPE

This specification covers a metallic surface raceway that consists of raceway base and cover, fittings, and device covers. The raceway can be divided into two equal channels.

1.2 CLASSIFICATIONS

Use metallic surface only as specified in Article 386 of the National Electric Code.

The raceway must meet the requirements of UL 5.

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The metallic surface raceway system shall be provided by Thomas & Betts.

2.2 MATERIALS

Base & Covers: The base shall be constructed of 0.50" minimum thickness steel and the cover shall be constructed of 0.040" minimum thickness steel. Both shall be painted ivory or gray.

Fittings: The fitting bases shall be constructed of 0.50" minimum thickness steel and the covers shall be constructed of 0.040" minimum thickness steel. Both shall be painted ivory or gray.

Device Plates: All device box bases shall be 0.040" minimum thickness steel painted ivory or gray.

2.3 COMPONENTS

Base & Covers: The raceway system shall consist of a two-piece base and cover design that snap together without any fasteners. When assembled, the edges of the base and cover must be concealed within the interior of the raceway, leaving a smooth radius along the outside length of the raceway. The height shall be 1¾" and the width shall be 4¾". The base shall be available in 10 ft. lengths and the cover shall be available in 5 ft. lengths. An optional pre-installed barrier divider shall be offered to divide the raceway into two

equal channels to accommodate high and low voltage wiring in the same raceway. Precut covers shall be available to install devices on-center without field cutting.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover. Radius fittings shall be available for providing the appropriate bend radius for Cat 5e and fiber optic wiring. All fittings shall have an optional barrier to maintain voltage separation through the fitting.

Device Plates: A complete offering of device plates of electrical and data communications wiring shall be provided.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: SR700 Metallic Surface Raceway

SECTION 1: GENERAL

1.1. SCOPE

This specification covers a metallic surface raceway that consists of raceway base and cover, fittings, and device covers. The raceway can be divided into two equal channels.

1.2 CLASSIFICATIONS

Use metallic surface only as specified in Article 386 of the National Electric Code.

The raceway must meet the requirements of UL 5.

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The metallic surface raceway system shall be provided by Thomas & Betts.

2.2 MATERIALS

Base & Covers: The base shall be constructed of 0.50" minimum thickness steel and the cover shall be constructed of 0.040" minimum thickness steel. Both shall be painted ivory or gray.

Fittings: The fitting bases shall be constructed of 0.50" minimum thickness steel and the covers shall be constructed of 0.040" minimum thickness steel. Both shall be painted ivory or gray.

Device Plates: All device box bases shall be 0.040" minimum thickness steel painted ivory or gray.

2.3 COMPONENTS

Base & Covers: The raceway system shall consist of a two-piece base and cover design that snap together without any fasteners. When assembled, the edges of the base and cover must be concealed within the interior of the raceway, leaving a smooth radius along the outside length of the raceway. The height shall be 3 $\frac{5}{8}$ " and the width shall be 4 $\frac{3}{4}$ ". The base shall be available in 10 ft. lengths and the cover shall be available in 5 ft. lengths. An optional pre-installed barrier divider shall be offered to divide the raceway into two

equal channels to accommodate high and low voltage wiring in the same raceway. Precut covers shall be available to install devices on-center without field cutting.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover. Radius fittings shall be available for providing the appropriate bend radius for Cat 5e and fiber optic wiring. All fittings shall have an optional barrier to maintain voltage separation through the fitting.

Device Plates: A complete offering of device plates of electrical and data communications wiring shall be provided.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

Thomas & Betts

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: SR800 Metallic Surface Raceway

SECTION 1: GENERAL

1.1. SCOPE

This specification covers a metallic surface raceway that consists of raceway base and cover, fittings, and device covers. The raceway can be divided into three equal channels.

1.2 CLASSIFICATIONS

Use metallic surface only as specified in Article 386 of the National Electric Code.

The raceway must meet the requirements of UL 5.

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The metallic surface raceway system shall be provided by Thomas & Betts.

2.2 MATERIALS

Base & Covers: The base shall be constructed of 0.50" minimum thickness steel and the cover shall be constructed of 0.040" minimum thickness steel. Both shall be painted ivory or gray.

Fittings: The fitting bases shall be constructed of 0.50" minimum thickness steel and the covers shall be constructed of 0.040" minimum thickness steel. Both shall be painted ivory or gray.

Device Plates: All device box bases shall be 0.040" minimum thickness steel painted ivory or gray.

2.3 COMPONENTS

Base & Covers: The raceway system shall consist of a two-piece base and cover design that snap together without any fasteners. When assembled, the edges of the base and cover must be concealed within the interior of the raceway, leaving a smooth radius along the outside length of the raceway. The height shall be 1¾" and the width shall be 7¼". The base shall be available in 10 ft. lengths and the cover shall be available in 5 ft. lengths. An optional pre-installed barrier divider shall be offered to divide the raceway into three equal channels to accommodate general power,

isolated ground power, and low voltage wiring in the same raceway. Precut covers shall be available to install devices on-center without field cutting.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover. Fittings with a barrier shall be provided to maintain voltage separation through the fitting.

Device Plates: A complete offering of device plates of electrical and data communications wiring shall be provided.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

Specifications For T&B Single Channel Series 10, Series 30 and Series 80 Surface Raceway Systems

T&B's surface raceway systems shall be manufactured from a polyvinyl chloride (PVC) white or ivory which complies with UL 94 V-O requirements.

Raceway

- The T&B surface raceway systems shall be manufactured as a two-piece system consisting of a base and a snap-on cover.
- The T&B surface raceway systems shall provide protection for power, low voltage, data or communication wiring.
- The T&B surface raceway systems shall be UL Listed for electrical wiring up to 600 volts and comply with Underwriters Laboratories Inc. (UL5A).
- The T&B surface raceway systems shall be recognized by the National Electrical Code, Article 388, for nonmetallic Surface Raceway Systems.
- The raceway cover shall be removable from the base.
- Series 10 cross sectional area of 0.239 sq. in. Series 30 cross sectional area of 0.711 sq. in. Series 80 cross sectional area of 0.363 sq. in.
- Base and cover shall be paintable.

Boxes

- Boxes shall consist of a base and lid.
- Box bases shall be capable of being utilized as a starter box or outlet box.
- Box bases shall have a minimum capacity of 10 cubic inches and holes for mounting.
- Box adapters and box blanks shall have the capability of snapping into box bases.

Fittings

- Elbows, tees, and couplings shall have tabs molded in for secure fit to system.
- The manufacturer shall offer all the fittings required to form a complete integrated surface raceway system.
- Box lids shall snap into base for ease of installation.
- Box lids shall be capable of being interchanged for future cubic inch requirements.
- Ceiling boxes shall be manufactured of a high heat engineered composite material.
- Ceiling boxes shall have ½" K/O in base and capability of utilizing a no-bolt fixture stud.

Specifications For T&B Premier™ Multi-Channel Surface Raceway Systems.

Raceway

- The surface raceway systems shall be T&B Premier™ multi-channel.
- The T&B Premier surface raceway systems shall provide protection for power, low voltage, data and communication wiring in a 1-channel configuration with available dividers to adapt the raceway into 4 channels.
- The T&B Premier surface raceway shall be fully compatible with the T&B Single Channel surface raceway system.
- The T&B Premier surface raceway shall be recognized by the National Electrical Code, Article 388, for Surface Nonmetallic Raceway.
- The T&B Premier surface raceway shall be listed for electrical wiring up to 600 volts and comply with UL-5A.
- All components shall be paintable.
- The T&B Premier surface raceway systems shall be manufactured from a white polyvinyl chloride (PVC) meeting UL 94 V-O requirements.
- Cover finish surfaces shall be protected with a blue plastic film.

Boxes

- Device yoke shall snap into raceway and allow installation of standard devices.
- Device back box shall snap into device yoke to allow separation of wiring system.
- Dual device yoke shall snap into raceway and allow installation of electric devices side-by-side with communication devices.
- Transition lid adapter shall have location posts to allow proper alignment on device yoke, so additional depth can be achieved by attaching box lid with screws.

Fittings

- Cable retainers shall snap into main base.
- Adapters shall allow transition to T&B Single Channel raceway systems.
- Joint covers shall be installed between adjoining sections of covers to complete the aesthetic appearance of the installation.
- The manufacturer shall offer all the fittings required to form a completely integrated surface raceway system.

Thomas & Betts

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

Specifications For T&B Prestige™ Multi-Channel Surface Raceway Systems.

Raceway

- The surface raceway systems shall be T&B Prestige™ multi-channel.
- The T&B Prestige surface raceway systems shall provide protection for power, low voltage, data and communication wiring in a 3-channel configuration with available dividers to adapt the raceway into 10 channels.
- The T&B Prestige surface raceway shall be fully compatible with the T&B Single Channel surface raceway system.
- The T&B Prestige surface raceway shall be recognized by the National Electrical Code, Article 388, for Surface Nonmetallic Raceway.
- The T&B Prestige surface raceway shall be UL Listed for electrical wiring up to 600 volts and comply with UL-5A.
- All components shall be paintable.
- The T&B Prestige surface raceway shall be manufactured from a white polyvinyl chloride (PVC) meeting UL 94 V-O requirements.
- Cover finish surfaces shall be protected with a blue plastic film.
- The T&B Prestige surface raceway shall provide single channels of the following cross sectional areas:

Center Channel:	5.39 sq. in. (3480 sq. mm)
Chamfered:	1.4 sq. in. (905 sq. mm)
Square:	2.36 sq. in. (1525 sq. mm)
Extension:	5.27 sq. in. (3400 sq. mm)
- The T&B Prestige surface raceway shall consist of a single base and three snap on covers in a variety of profiles – all removable from the base.

Boxes

- Device yoke shall snap into raceway and allow installation of standard devices.
- Device back box shall snap into device yoke to allow separation of wiring system.
- Dual device yoke shall snap into raceway and allow installation of electric devices side-by-side with communication devices.
- Transition lid adapter shall have location posts to allow proper alignment on device yoke, so additional depth can be achieved by attaching box lid with screws.

Fittings

- Internal and external elbows shall have molded-in coupling for connection into main base.
- Flat elbows and flat tees shall be attached to the main base by means of a slide-in coupling.
- Cable retainers shall snap into main base.

- Adapters shall allow transition to T&B Single Channel raceway systems.
- Crossover bridge shall allow the capability of routing cabling/wiring between outer channels.
- Cover seals shall be installed between adjoining sections of covers to complete the aesthetic appearance of the installation.
- The manufacturer shall offer all the fittings required to form a complete integrated surface raceway system.

Specifications For T&B Single Channel Cove Molding Raceway Systems.

Raceway

- The T&B Single Channel Cove Molding shall be manufactured from a polyvinyl chloride (PVC) white or ivory which complies with UL 94 V-O requirements.
- The T&B Single Channel Cove Molding shall be manufactured as a two-piece system consisting of a base and a snap on cover.
- The T&B Single Channel Cove Molding shall provide protection for power, low voltage, data or communication wiring.
- The T&B Single Channel Cove Molding shall be UL Listed for electrical wiring up to 600 volts and comply with Underwriters Laboratories Inc. (UL-5A).
- The T&B Single Channel Cove Molding shall be recognized by the National Electrical Code, Article 388, for Surface Nonmetallic Raceway Systems.
- The raceway cover shall be removable from the base.
- The T&B Single Channel Cove Molding Series 90 cross sectional area shall be 1.169 sq. in.
- Base and cover shall be paintable.

FITTINGS

- Elbows, tees, and couplings shall have tabs molded in for secure fit to system.
- The manufacturer shall offer all the fittings required to form a complete integrated surface raceway system.
- Adapters shall allow transition to T&B Single Channel Systems.
- Conduit adapter shall provide entry from conduit in ceiling into T&B Single Channel Cove Molding.

T&B Surface Raceway Systems

Nonmetallic Surface Raceway

Specifications For T&B Multi-Channel Cove Molding Raceway Systems.

Raceway

- The T&B Multi-Channel Cove Molding shall provide protection for power, low voltage, data and communication wiring in a 3-channel configuration.
- The T&B Multi-Channel Cove Molding shall be fully compatible with the T&B Single Channel Surface Raceway System.
- The T&B Multi-Channel Cove Molding shall be recognized by the National Electrical Code, Article 388, for Surface Nonmetallic Raceway.
- The T&B Multi-Channel Cove Molding shall be UL Listed for electrical wiring up to 600 volts and comply with UL-5A.
- All components shall be paintable.
- The T&B Multi-Channel Cove Molding shall be manufactured from a white polyvinyl chloride (PVC) meeting UL 94 V-O requirements.
- The T&B Multi-Channel Cove Molding shall have a single base and a single removable snap fit cover.
- Cover finish surfaces shall be protected with a blue plastic film.
- The T&B Multi-Channel Cove Molding shall provide single channels of the following cross sectional areas:
 - Center: 2.031 sq. in. (1310 sq. mm)
 - Edges: 0.769 sq. in. (496 sq. mm)

Fittings

- Internal and external elbows shall snap into main base.
- Adapters shall allow transition to T&B Single Channel Systems.
- Cover couplings shall be installed between adjoining sections of covers to complete the aesthetic appearance of the installation.
- The manufacturer shall offer all the fittings required to form a complete integrated Multi-Channel Cove Molding.

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: SR50 Nonmetallic Surface Raceway

SECTION 1: GENERAL

1.1. SCOPE

This specification covers a small nonmetallic surface raceway system consisting of a one-piece latching base and cover, a two-piece base and cover, divider, fittings, and boxes. The raceway is used for both power and communications wiring.

1.2 CLASSIFICATIONS

Use nonmetallic surface only as specified in Article 388 of the National Electric Code.

The raceway meets the requirements of UL 5A.

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The nonmetallic surface raceway system shall be provided by Thomas & Betts.

2.2 MATERIALS

All components shall be made from UL94V-0 rated rigid PVC. The color of all components visible after installation shall be off white.

2.3 COMPONENTS

Base & Covers: The raceway system shall offer two styles of base and cover. The one-piece latching style must be co-extruded with a durable elastomeric hinge that will not discolor or crack after repeated use. The two-piece design must provide a cover that completely covers the base with no seams showing after installation. For both styles, the height must be ½" and the width must be ¾". The base shall accept an optional divider for separation of power and data in the same raceway. The base shall be provided with an adhesive backing for fast installation. The base and cover shall be available in standard 6 ft. lengths.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover, and the fitting cover shall overlap the base and cover edges. Splice covers shall be available to hide the base and cover edges when two raceway sections are spliced together.

Device Boxes: The raceway system shall include junction boxes that accept industry standard single and double gang faceplates for power and data activations.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: **SR100 Nonmetallic Surface Raceway**

SECTION 1: GENERAL

1.1. SCOPE

This specification covers a small nonmetallic surface raceway system consisting of a one-piece latching base and cover, a two-piece base and cover, divider, fittings, and boxes. The raceway is used for both power and communications wiring.

1.2 CLASSIFICATIONS

Use nonmetallic surface only as specified in Article 388 of the National Electric Code.

The raceway meets the requirements of UL 5A.

Meets TIA / EIA 569-A Telecommunications Standards.

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The nonmetallic surface raceway system shall be provided by Thomas & Betts.

2.2 MATERIALS

All components shall be made from UL94V-0 rated rigid PVC. The color of all components visible after installation shall be off white.

2.3 COMPONENTS

Base & Covers: The raceway system shall offer two styles of base and cover. The one-piece latching style must be co-extruded with a durable elastomeric hinge that will not discolor or crack after repeated use. The two-piece design must provide a cover that completely covers the base with no seams showing after installation. For both styles, the height must be $\frac{3}{4}$ " and the width must be 1 $\frac{1}{2}$ ". The base shall accept an optional divider for separation of power and data in the same raceway. The base shall be provided with an adhesive backing for fast installation. The base and cover shall be available in standard 6 ft. lengths.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover, and the fitting cover shall overlap the base and cover edges. Splice covers shall be available to hide the base and cover edges when two raceway sections are spliced together. A line of radius fittings shall be provided to provide appropriate bend radius for Cat 5e and fiber optic wiring. A reducing tee fitting shall be available for connection with the SR50 raceway system.

Device Boxes: The raceway system shall include junction boxes that accept industry standard single and double gang faceplates for power and data activations.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: NM600 Nonmetallic Surface Raceway

SECTION 1: GENERAL

1.1. SCOPE

This specification covers a large nonmetallic surface raceway system consisting of a base, covers, divider, fittings, device bracket, and faceplates. The raceway is used for both power and communications wiring.

1.2 CLASSIFICATIONS

Use nonmetallic surface only as specified in Article 388 of the National Electric Code

The raceway meets the requirements of UL 5A.

UL File Numbers:

Raceway – E191069

Fittings – E191070

Meets TIA / EIA 569-A Telecommunications Standards.

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The nonmetallic surface raceway system shall be as manufactured by Thomas & Betts.

2.2 MATERIALS

All components shall be made from UL94V-0 rated rigid PVC. The color of all components visible after installation shall be off white.

2.3 COMPONENTS

Base & Covers: The raceway base shall include two main channels separated by an integral divider. Each channel shall have an attachment means for an optional snap-in divider to further divide the channel into two compartments. The base shall be free of cosmetic grooves or indentations where dust and debris could accumulate. Two cover options shall be available: (1) a large cover that encompasses both channels, and (2) a small cover for one channel. The base, covers, and divider shall be available in 8 ft. lengths. The overall raceway profile shall be 6 $\frac{9}{16}$ " wide by 1 $\frac{23}{32}$ " deep.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees must have a minimum 1.5" bend radius for compatibility with Fiber Optic and Category 5e cabling. The fittings shall maintain separation of the two channels throughout the fitting. All elbows and tees shall consist of a base and a cover, and the fitting cover shall overlap the base and cover edges. Splice covers shall be available to hide the base and cover edges when two raceway sections are spliced together.

Device Bracket & Faceplates: A device bracket shall be used to mount devices to the raceway base. NM600P series color-matched faceplates can be used to cover the devices. The device bracket and raceway channel must also accept all industry-standard single-gang faceplates. The raceway shall accommodate a device bracket in each channel at the same location along the length of the raceway.

Information Outlets & Connectors: The raceway shall accommodate the Thomas & Betts complete line of information outlets and connectors for UTP (including Category 5e), fiber optic, and coax cabling. A complete line of identification labels and color-coded plastic icons shall be available.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

T&B Surface Raceway Systems

Specifications

PRODUCT SPECIFICATION: Power Poles

SECTION 1: GENERAL

1.1. SCOPE

This specification covers aluminum power poles used for power and data wiring.

1.2 CLASSIFICATIONS

Use power poles only as specified in Article 386 of the National Electric Code.

Power Poles must meet the requirements of UL 498.

SECTION 2: PRODUCTS

2.1 MANUFACTURER

The aluminum power poles shall be manufactured by Thomas & Betts.

2.2 MATERIALS

Channels: The power pole channels shall be constructed of aluminum. The finish shall be ivory paint or anodized aluminum.

Divider: The voltage divider shall be galvanized steel.

Mounting Accessories: The ceiling trim shall be aluminum with a finish to match the channels. Mounting brackets and support clips shall be steel.

2.3 COMPONENTS

Channel & Divider: The pole shall be constructed of two channels snapped together. The overall cross-sectional dimensions of the pole assembly shall be 2" by 2¼". A voltage divider shall be used to separate the pole into two compartments. The voltage divider shall only extend from the top of the pole to the bottom of the lowest power receptacle to allow communication and power outlets on the same side of the pole. NEMA 5-20R receptacles shall be used, and the pole shall be pre-wired with a 6" pigtail extending from the top of the pole. The poles must be available in standard lengths of 10 ft., 12 ft., and 15ft.

Fittings: The raceway system shall contain a comprehensive line of elbows, tees, and end fittings necessary for complete installations. All elbows and tees shall consist of a base and a cover. The fitting covers must overlap the raceway when installed. A conduit entrance end fitting must be available to provide service to the raceway.

Device Boxes: The raceway system shall include device boxes that accept industry standard single and double gang faceplates for power or data activations. Device boxes must range from 1 to 6 gangs and from 1" to 2¾" depth. Round fixture support boxes and switch boxes shall be provided. Boxes that are red and accept fire alarms must also be available.

SECTION 3: INSTALLATION

Installation procedures shall comply with the instruction sheets provided by Thomas & Betts with all raceway system components, as well as the National Electric Code.

Total wire management solutions!



Single-source convenience for every connectivity application!

Reconfiguring electrical wiring and communications networks for building retrofits or additions? Specify Thomas & Betts Surface Raceway

Systems to get the flexibility, functionality and compatibility you need for every connectivity application.

Our comprehensive line of wire management solutions includes metallic, non-metallic, and aluminum surface raceways, power poles,

in-floor and undercarpet systems, and complete structured cabling systems. Custom-engineered systems available.

For integrated connectivity, ease of installation, and the convenience of single-source purchasing and support, see your Thomas & Betts distributor. Or for Technical Services, call 888-862-3289.



Decorative Cove Molding Raceway, ideal for executive offices and conference rooms.



3-channel metal raceway. A Thomas & Betts exclusive!

Steel City • Superstrut® • Union® • Bowers® • Kindorf

Thomas & Betts