



## Constant Current LED Driver

### Model Number AC-115CD1.2ACA


Input Voltage: 120-277V  
Input Frequency: 50/60Hz  
Side Mount/Leads

**DIMMING**

#### ELECTRICAL SPECIFICATIONS:


Output Power Max	Input Power	Input Current	Minimum PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Min. Starting Temp.	Efficiency Up To	Dimming Protocol	Dimming Range
115W	130W	1.2A @ 120V 0.52A @ 277V	>0.9	<20%	70-96V	1200mA±5%	90°C	-40°C	88%	0 to 10V	10-100%

#### WIRING:

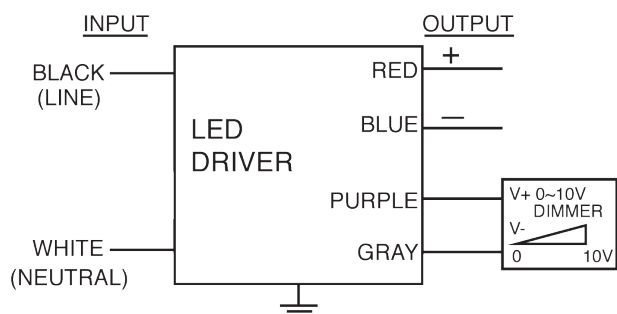

Lead Lengths					
Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

#### PHYSICAL:

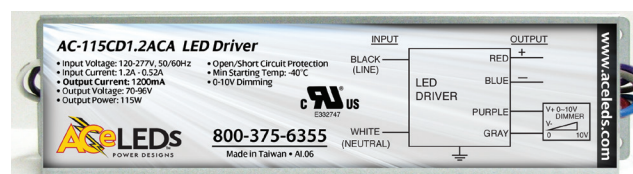

#### Dimensions

Length	9.5"
Width	2.4"
Height	1.46"
Mounting Length	8.9"
Weight	lbs.
Case Qty.	pcs.

#### SAFETY & PERFORMANCE:

- UL and cUL Recognized
- UL Outdoor Type I
- Class A sound rating
- No PCBs
- Input/Output Isolation
- FCC (EMI and RF protection away from 900-950MHz)
- Over Voltage/Short Circuit/Over Temperature Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C\*
- Surge Protection

#### INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/I05C tinned strand copper lead-wires are required for installation
- Remote installation distance is 18 ft at full load
- LED driver cases should be grounded



\*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See [aceleds.com](http://aceleds.com) for complete warranty policy.



3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • [www.aceleds.com](http://www.aceleds.com)

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

