


ELECTRICAL SPECIFICATIONS:

Output Power	Input Power	Input Current	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Min Starting Temp	IP Rating	Efficiency Up To	Dimming Protocol	Dimming Range
30W	35.5W	0.3@120V 0.13@277V	>0.90	<20	24-43V	125mA-700mA	90°C	0°C	64	82	0 to 10V	1 to 100%

WIRING:

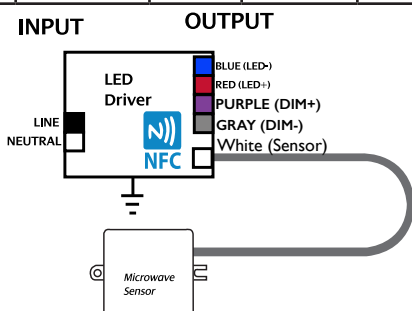

Lead Lengths

Black	5.9"	Blue	5.9"	Purple	7.1"
White	5.9"	Red	5.9"	Gray	7.1"
Microwave Sensor	18"				

PHYSICAL:



Dimensions	Length	Width	Height
AC30CD700AP4G	6.5"	2.9"	1.18"

SAFETY:

- UL and cUL certified
- Class 2
- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Programmable Output Current
- Conventional 0-10V Dimming Driver When Sensor Not Connected
- Connecting Sensor Provides:
 - o Switch to Full Brightness When Area Occupied
 - o Switch to Pre-Selected Dimming Level When Area Not Occupied
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 Kv)
- S4: 100%(Off) Enables External Dimmer
- Dim-To-Off Programming Option
 - o Inactive: Code = 78 05 00 01 (Default)
 - o Active: Code = 78 05 01 01

INSTALLATION:

- IP 64
 - Max Remote installation distance is 18 ft
 - LED driver cases should be grounded
 - LED drivers shall be installed inside electrical enclosures
 - 18 AWG 600V/105C tinned stranded copper lead-wires are required for installation
- *AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to 75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.



3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.




Microwave Occupancy Sensor Electrical Specifications


Operating Temperature	Sensitivity	Time Delay
-20~+50°C	6m Max	1 sec - 15 minutes

Dimensions			
Length	2.38"	Height	0.79"
Width	1.81"	Mounting Length	2.1"


**Enclosure - Microwave Sensor
Dimensions on diagram in mm**

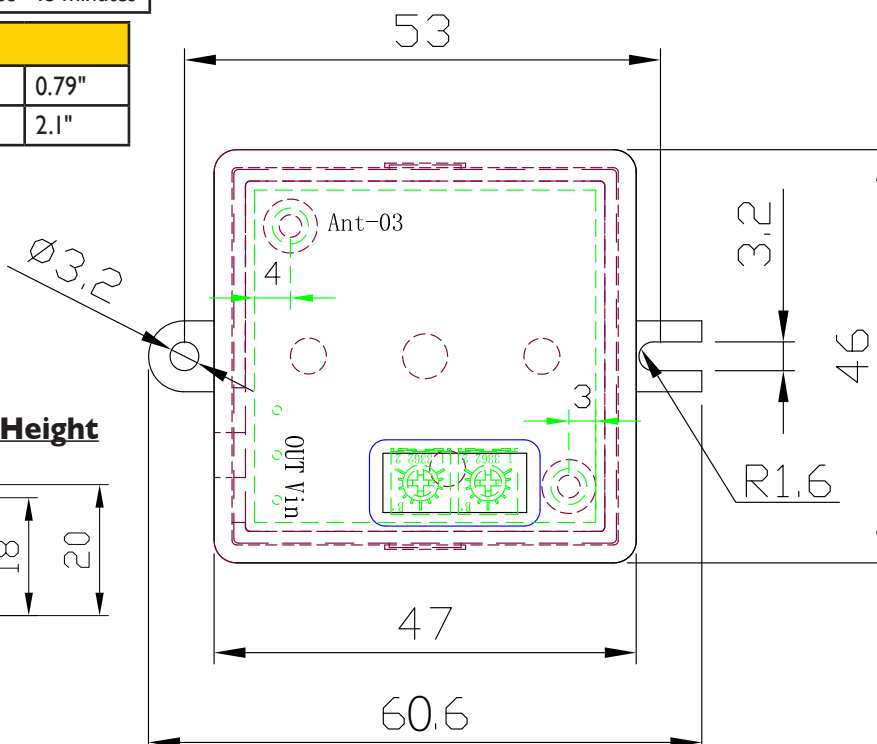

Enclosure - Microwave Sensor - Height

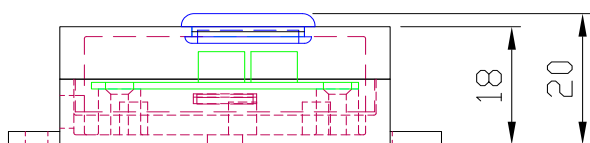

Sensor Coverage Area

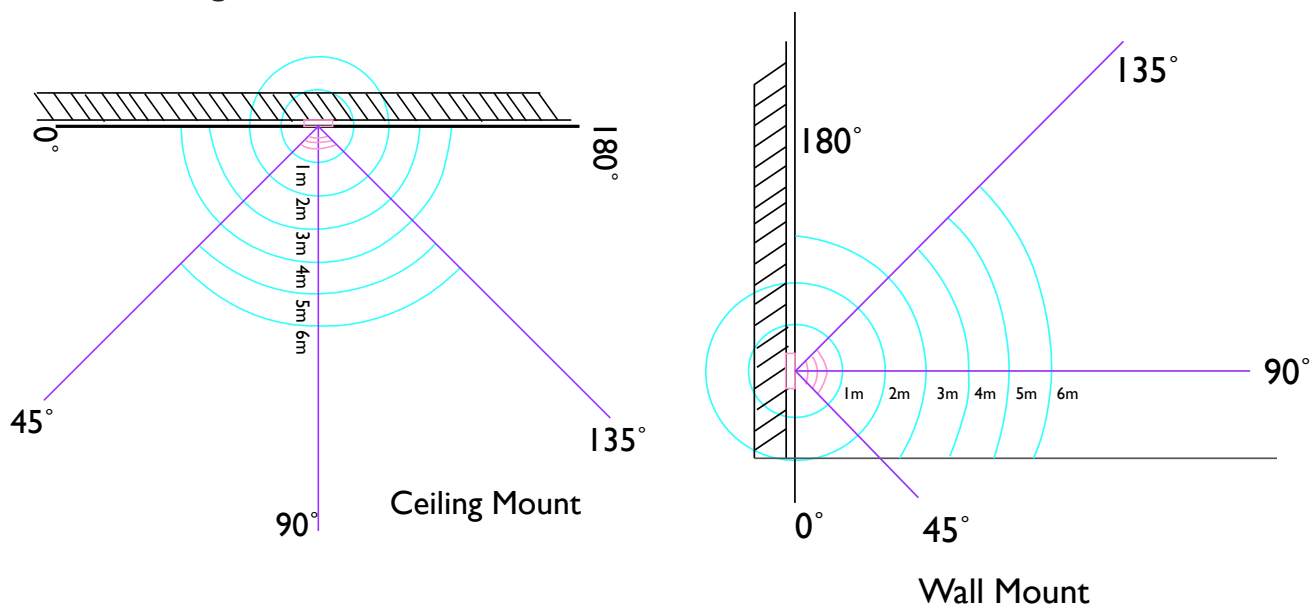

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.


Performance Charateristics

**CONTROL THE IOUT WITH THE
PROGRAMMING WAND. DOWNLOAD
SOFTWARE FROM**

<http://www.aceleds.com/programmable.php>

IOUT/VOUT CURVE

Use with NFC-V Reader App Available Free at Google App Store

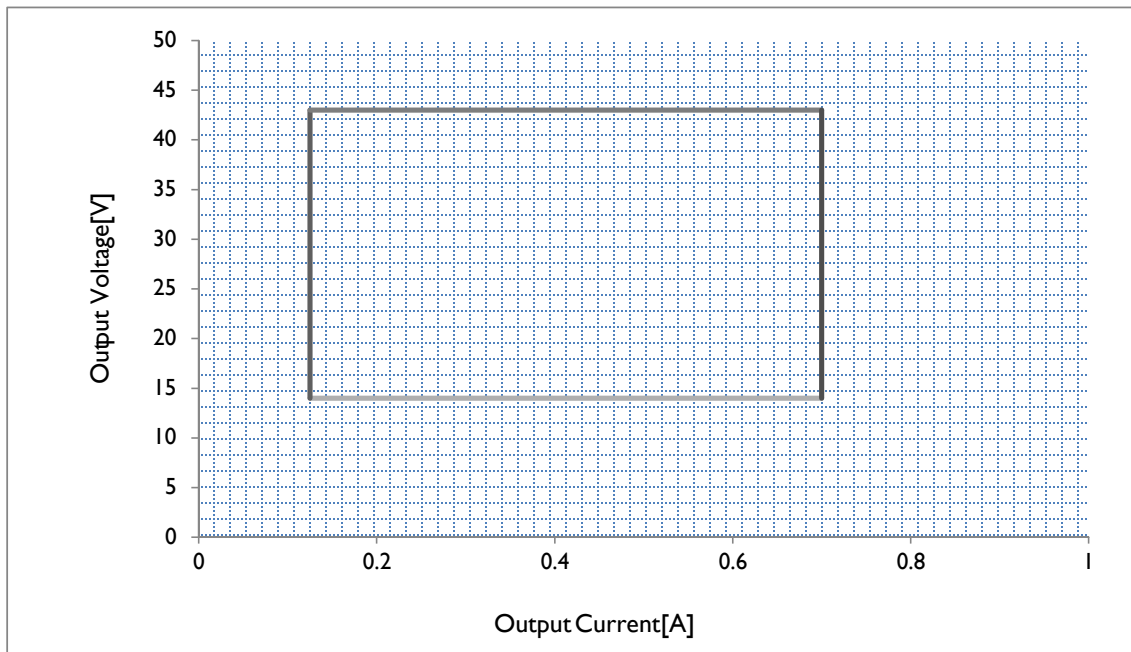

Phone Instructions

First you must have a Android device (phone/tablet) with NFC-V app downloaded.

Open App; then place the device on top of the driver matching up sensors untile it syncs up

Basic format

Write

Insert the appropriate code from chart above

Write

Successfully written will appear

To Check: Read


Read

Shows you the Block - 00 00 00 00

This is where the code you input appears


Performance Characteristics

Life Time v.s Case Temperature Curve

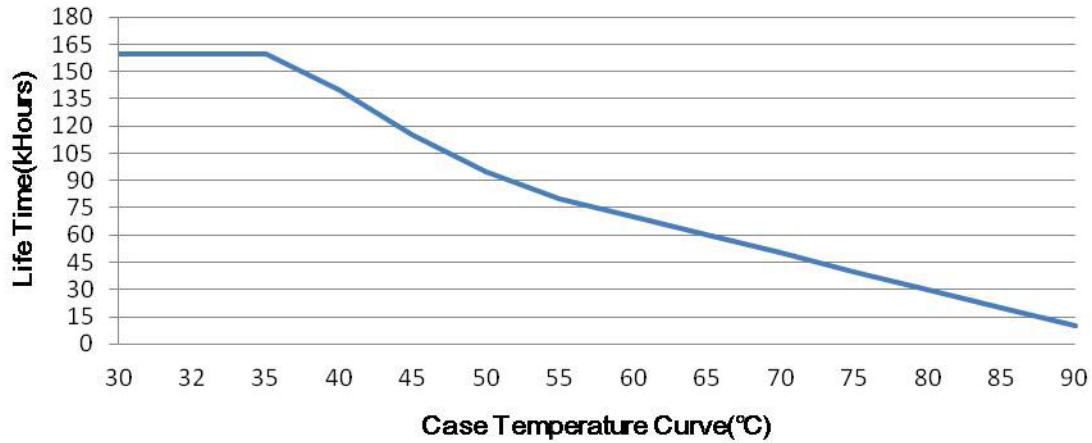

Derating Curve

120Vac & 277Vac

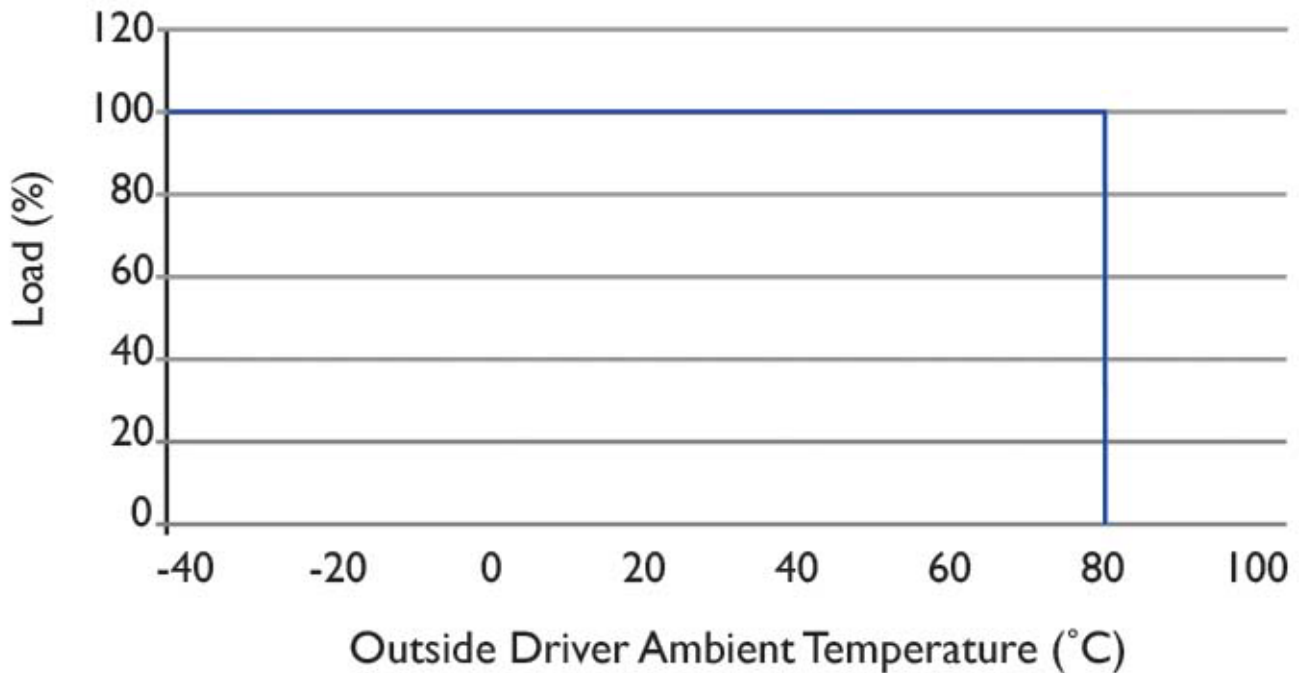


3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com


Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

Performance Characteristics

Efficiency v.s Load

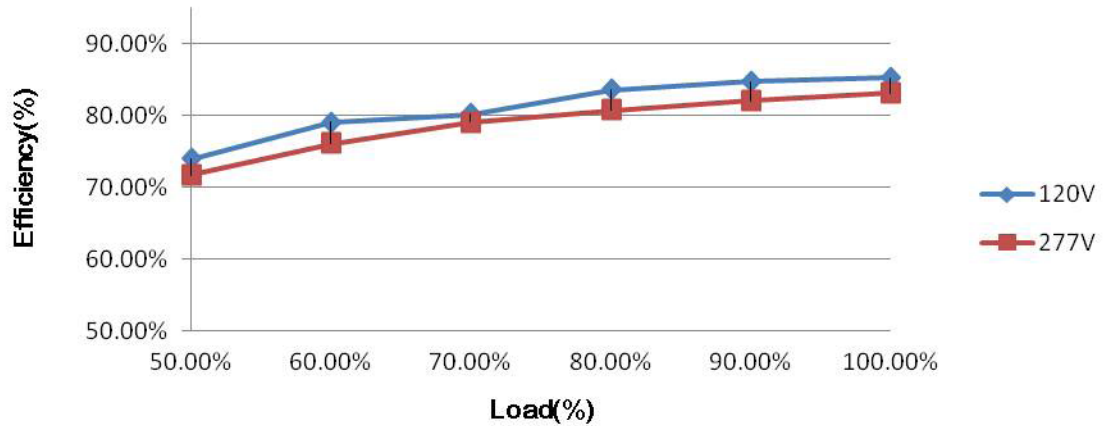


Power Factor V.S Load

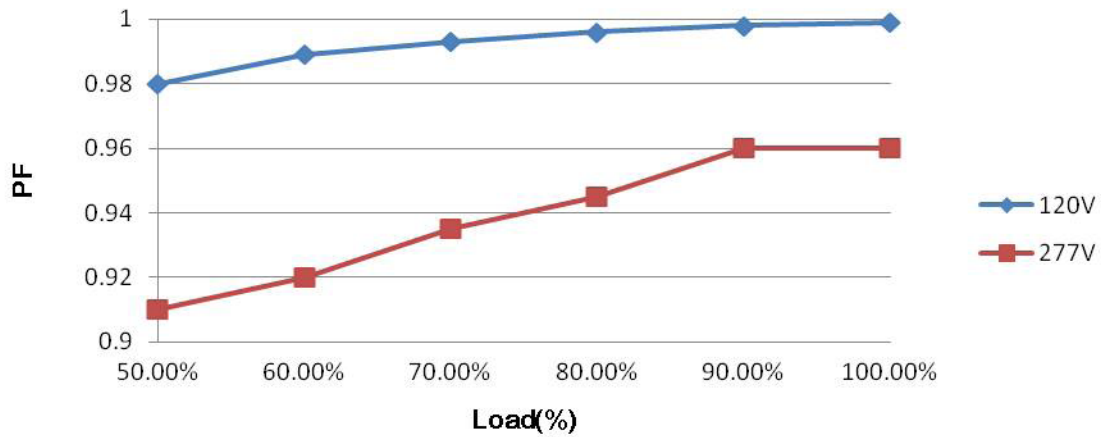


Performance Characteristics

Output Current v.s. Dimming

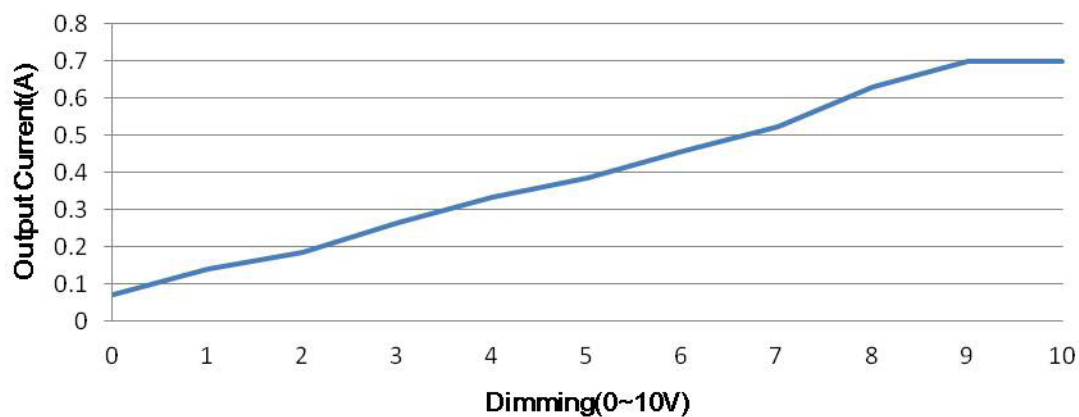

Resistance V.S Output Current

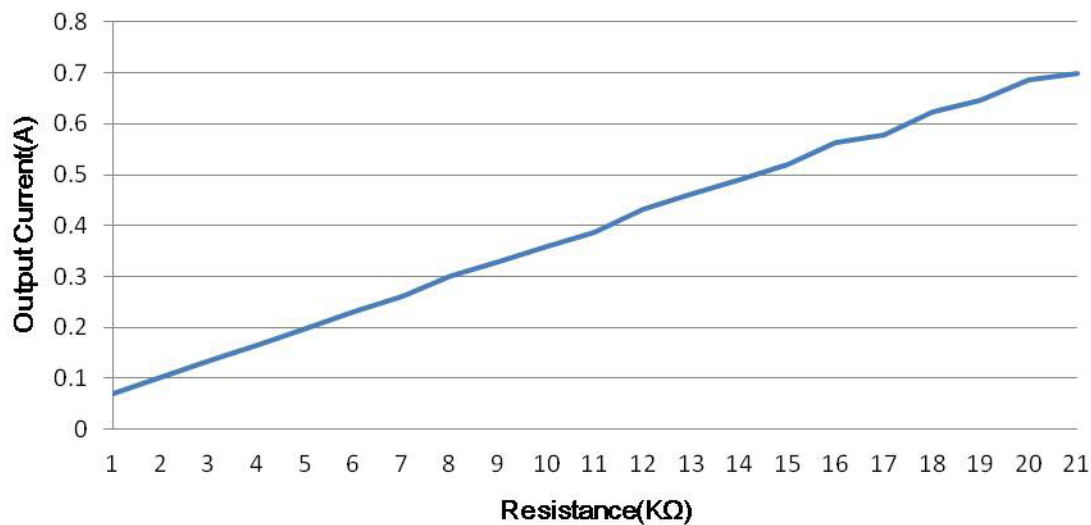

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.