




MICROWAVE CORPORATION v05.1208


**OBSOLETE PRODUCT**  
**HMC568LC5**
**GaAs MMIC I/Q DOWNCONVERTER**  
**9 - 12 GHz**
**Typical Applications**

The HMC568LC5 is ideal for:

- Point-to-Point and Point-to-Multi-Point Radio
- Military Radar, EW & ELINT
- Satellite Communications

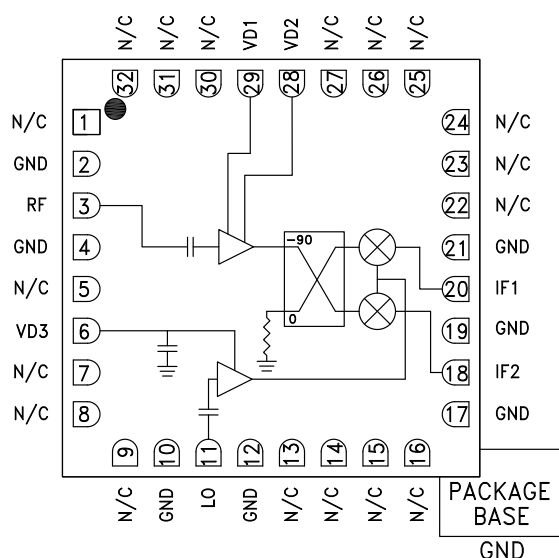**Functional Diagram**

**Features**

- Conversion Gain: 14 dB
- Image Rejection: 33 dB
- LO to RF Isolation: 55 dB
- Noise Figure: 2 dB
- Input IP3: -1 dBm
- 32 Lead 5x5mm SMT Package: 25mm<sup>2</sup>

**General Description**

The HMC568LC5 is a compact GaAs MCM I/Q downconverter in a leadless RoHS compliant SMT package. This device provides a small signal conversion gain of 14 dB with a noise figure of 2 dB and 33 dB of image rejection. The HMC568LC5 utilizes an LNA followed by an image reject mixer which is driven by an LO buffer amplifier. The image reject mixer eliminates the need for a filter following the LNA, and removes thermal noise at the image frequency. I and Q mixer outputs are provided and an external 90° hybrid is needed to select the required sideband. The HMC568LC5 is a much smaller alternative to hybrid style image reject mixer downconverter assemblies, and it eliminates the need for wire bonding by allowing the use of surface mount manufacturing techniques.

**Electrical Specifications,  $T_A = +25^\circ\text{C}$ ,  
 $IF = 100\text{ MHz}$ ,  $LO = 0\text{ dBm}$ ,  $VD3 = 5\text{V}$ ,  $VD1, VD2 = 3\text{V}^*$**

| Parameter                | Min. | Typ.       | Max. | Units |
|--------------------------|------|------------|------|-------|
| Frequency Range, RF      |      | 9 - 12     |      | GHz   |
| Frequency Range, LO      |      | 5.5 - 15.5 |      | GHz   |
| Frequency Range, IF      |      | DC - 3.5   |      | GHz   |
| Conversion Gain (As IRM) | 10   | 14         |      | dB    |
| Noise Figure             |      | 2.0        |      | dB    |
| Image Rejection          | 20   | 33         |      | dB    |
| 1 dB Compression (Input) |      | -7         |      | dBm   |
| LO to RF Isolation       | 40   | 55         |      | dB    |
| LO to IF Isolation       | 20   | 38         |      | dB    |
| IP3 (Input)              |      | -1         |      | dBm   |
| Amplitude Balance        |      | $\pm 1$    |      | dB    |
| Phase Balance            |      | $\pm 5$    |      | Deg   |
| Total Supply Current     |      | 160        | 208  | mA    |

\*Data taken as IRM with external IF Hybrid

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)



MICROWAVE CORPORATION v05.1208




**OBSOLETE PRODUCT**

**HMC568LC5**


# GaAs MMIC I/Q DOWNCONVERTER 9 - 12 GHz

**Data Taken As IRM With External IF Hybrid**


## Conversion Gain vs. Temperature

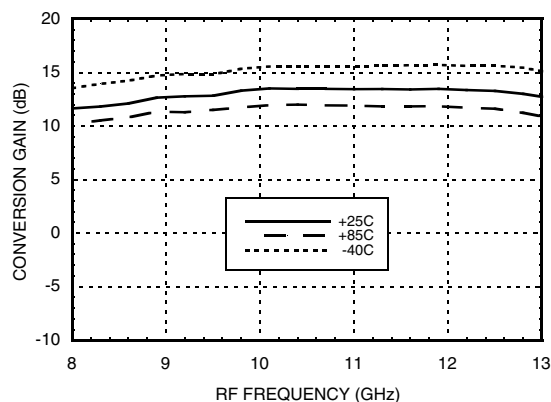


## Image Rejection vs. Temperature

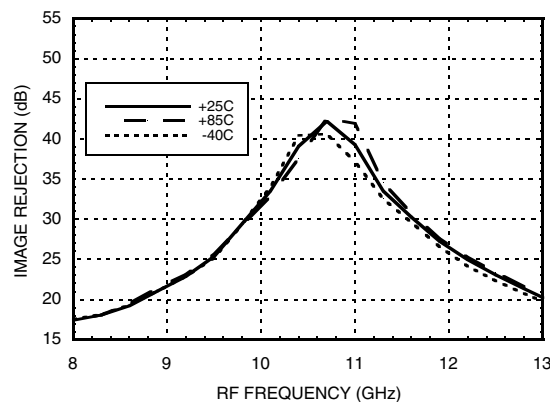


## Conversion Gain vs. LO Drive

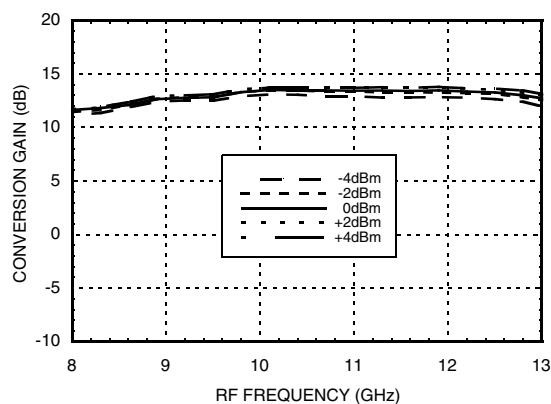


## Return Loss

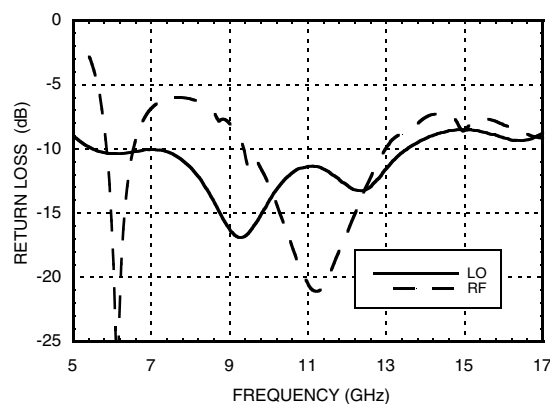

## Input P1dB vs. Temperature

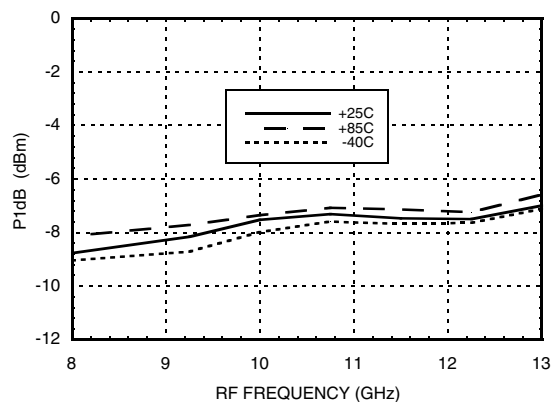


## Input IP3 vs. LO Drive

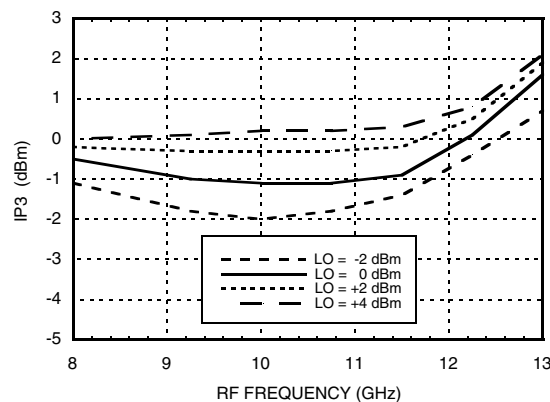


**GaAs MMIC I/Q DOWNCONVERTER  
9 - 12 GHz**

**Quadrature Channel Data Taken Without IF Hybrid**


**Isolations**

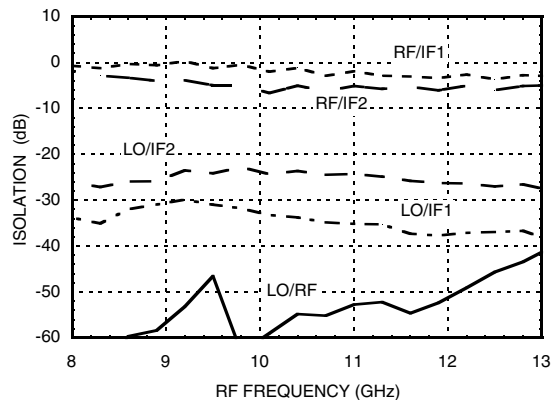


**IF Bandwidth\***

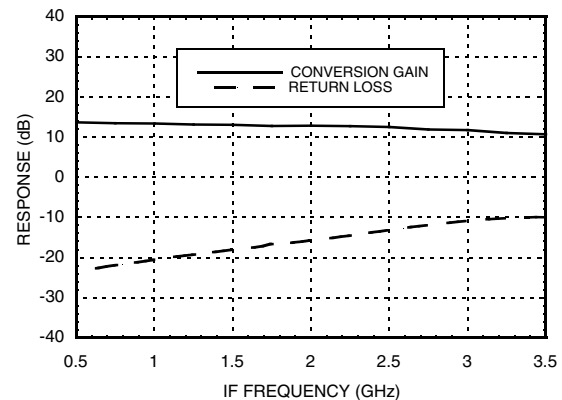


**Amplitude Balance vs. LO Drive**

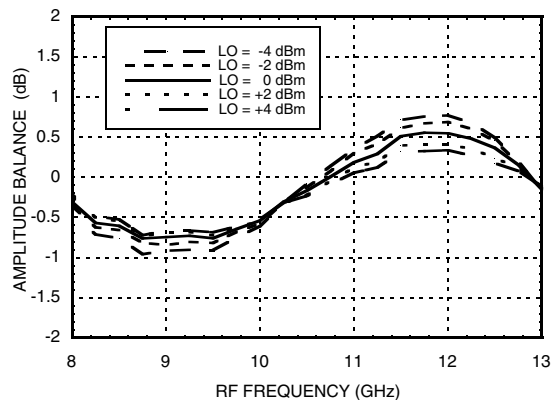


**Phase Balance vs. LO Drive**

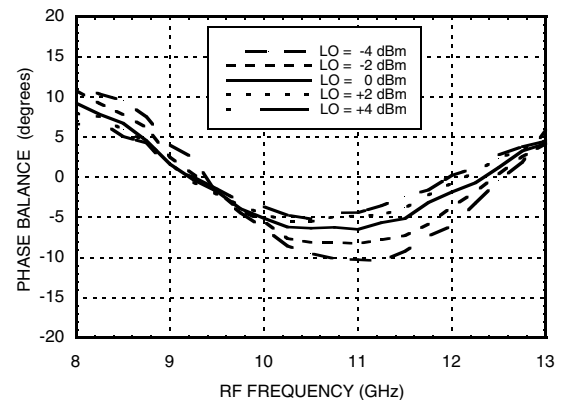

**Noise Figure vs. LO Drive,  
LO Frequency = 10 GHz**

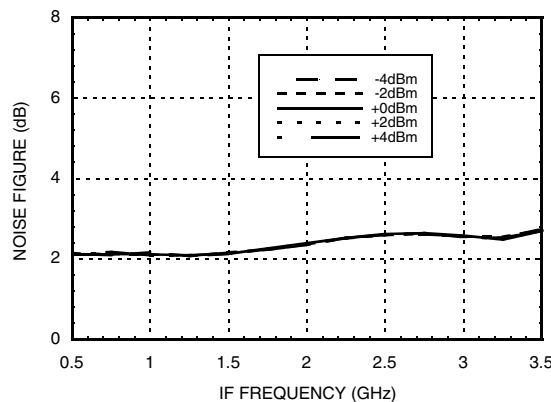







**Noise Figure vs. LO Drive,  
IF Frequency = 100 MHz**

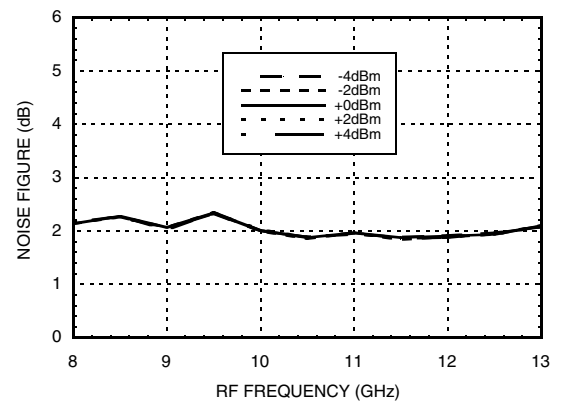


\* Conversion gain data taken with external IF hybrid, LO frequency fixed at 10 GHz and RF varied



### Pin Descriptions


| Pin Number                                   | Function | Description  | Interface Schematic   |
|--|----------|--|---|
| 1, 5, 7 - 9,<br>13 - 16, 22 - 27,<br>30 - 32 | N/C      | No connection required. These pins may be connected to RF/DC ground without affecting performance.   |   |
| 2, 4, 10, 12,<br>17, 19, 21                  | GND      | These pins and ground paddle must be connected to RF/DC ground.  |    |
| 3  | RF       | This pin is AC coupled and matched to 50 Ohms.   |    |
| 6  | VD3      | Power supply for LO amplifier.<br>100 mA typical, 120 mA maximum.  |    |
| 28, 29                                       | VD1, VD2 | Power supply for RF LNA.<br>60 mA typical, 88 mA maximum.  |    |
| 18   | IF2      | This pin is DC coupled for applications not requiring operation to DC. This port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary frequency range. For operation to DC, this pin must not sink / source more than 3 mA of current or part non-function and possible failure will result. |   |
| 20   | IF1      |  |   |
| 11   | LO       | This pin is AC coupled and matched to 50 Ohms.   |  |

### Typical Application

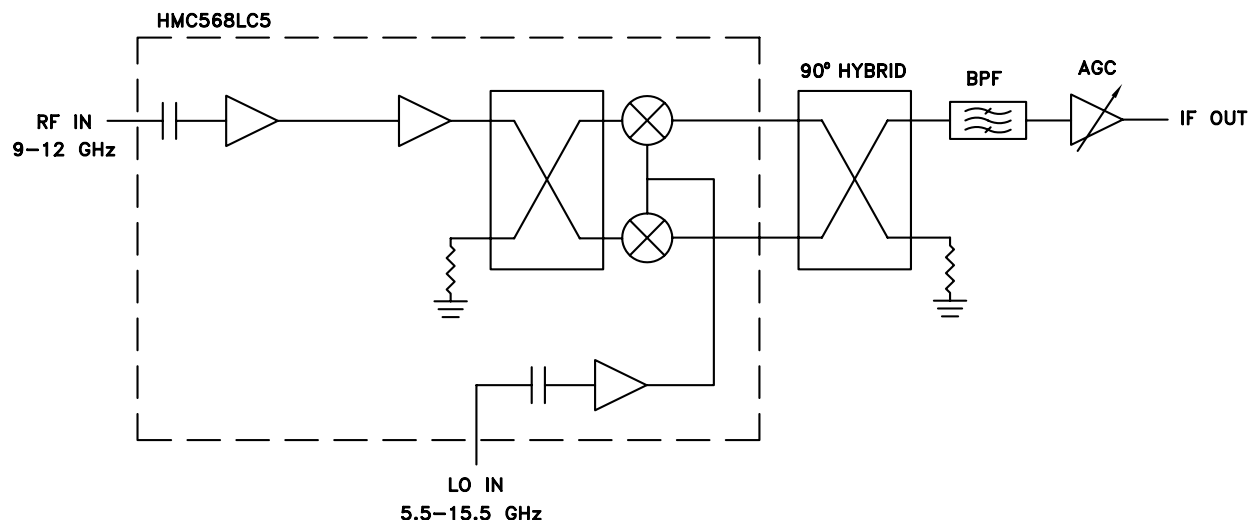

Note: LSB and USB is determined by GND on Hybrid

# Evaluation PCB

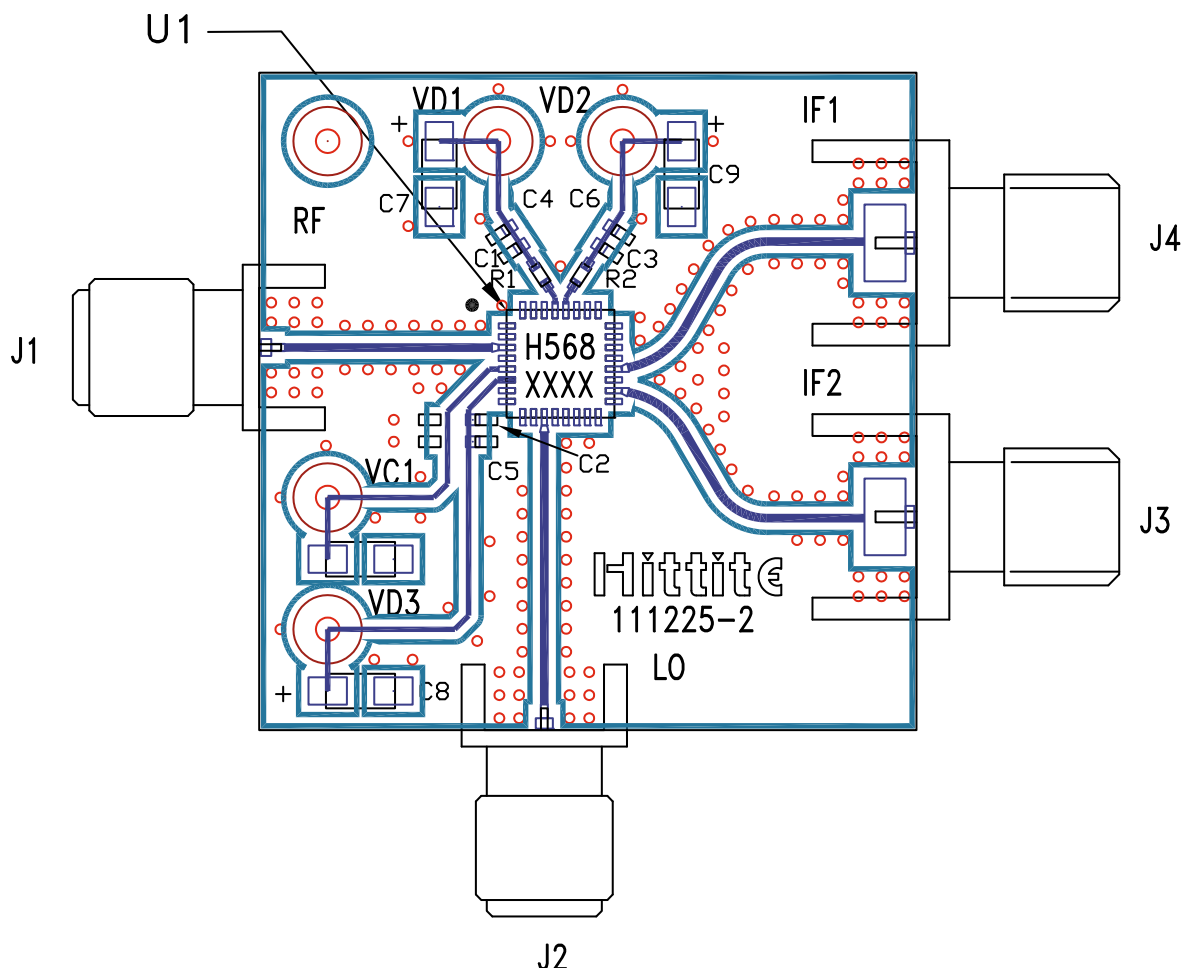

## List of Materials for Evaluation PCB 111227 [1]

| Item       | Description                          |
|------------|--------------------------------------|
| C1, C2, C3 | Capacitor 0402, Pkg. 100pF           |
| C4, C5, C6 | Capacitor 0402, Pkg. 1000pF          |
| C7, C8, C9 | Capacitor, Case A, 2.2uF *(Polarity) |
| J1, J2     | PCB Mount SMA RF Connector, SRI      |
| J3, J4     | PCB Mount SMA Connector, Johnson     |
| J5, J6     | DC Pin                               |
| J7         | DC Pin                               |
| R1, R2     | Resistor, 0402 Pkg. 0 Ohm            |
| U1         | HMC568LC5                            |
| VC1        | N/C                                  |
| PCB [2]    | 111225 Evaluation Board              |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



MICROWAVE CORPORATION v05.1208



**OBSOLETE PRODUCT**

**HMC568LC5**

**GaAs MMIC I/Q DOWNCONVERTER**  
**9 - 12 GHz**

**Notes:**