


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/21	
A		UPDATE DIM.	6/10/21	JJ
B		UPDATE DIM.	9/14/21	WX/RC
C		UPDATE DRAWING	4/11/25	WY/SL2

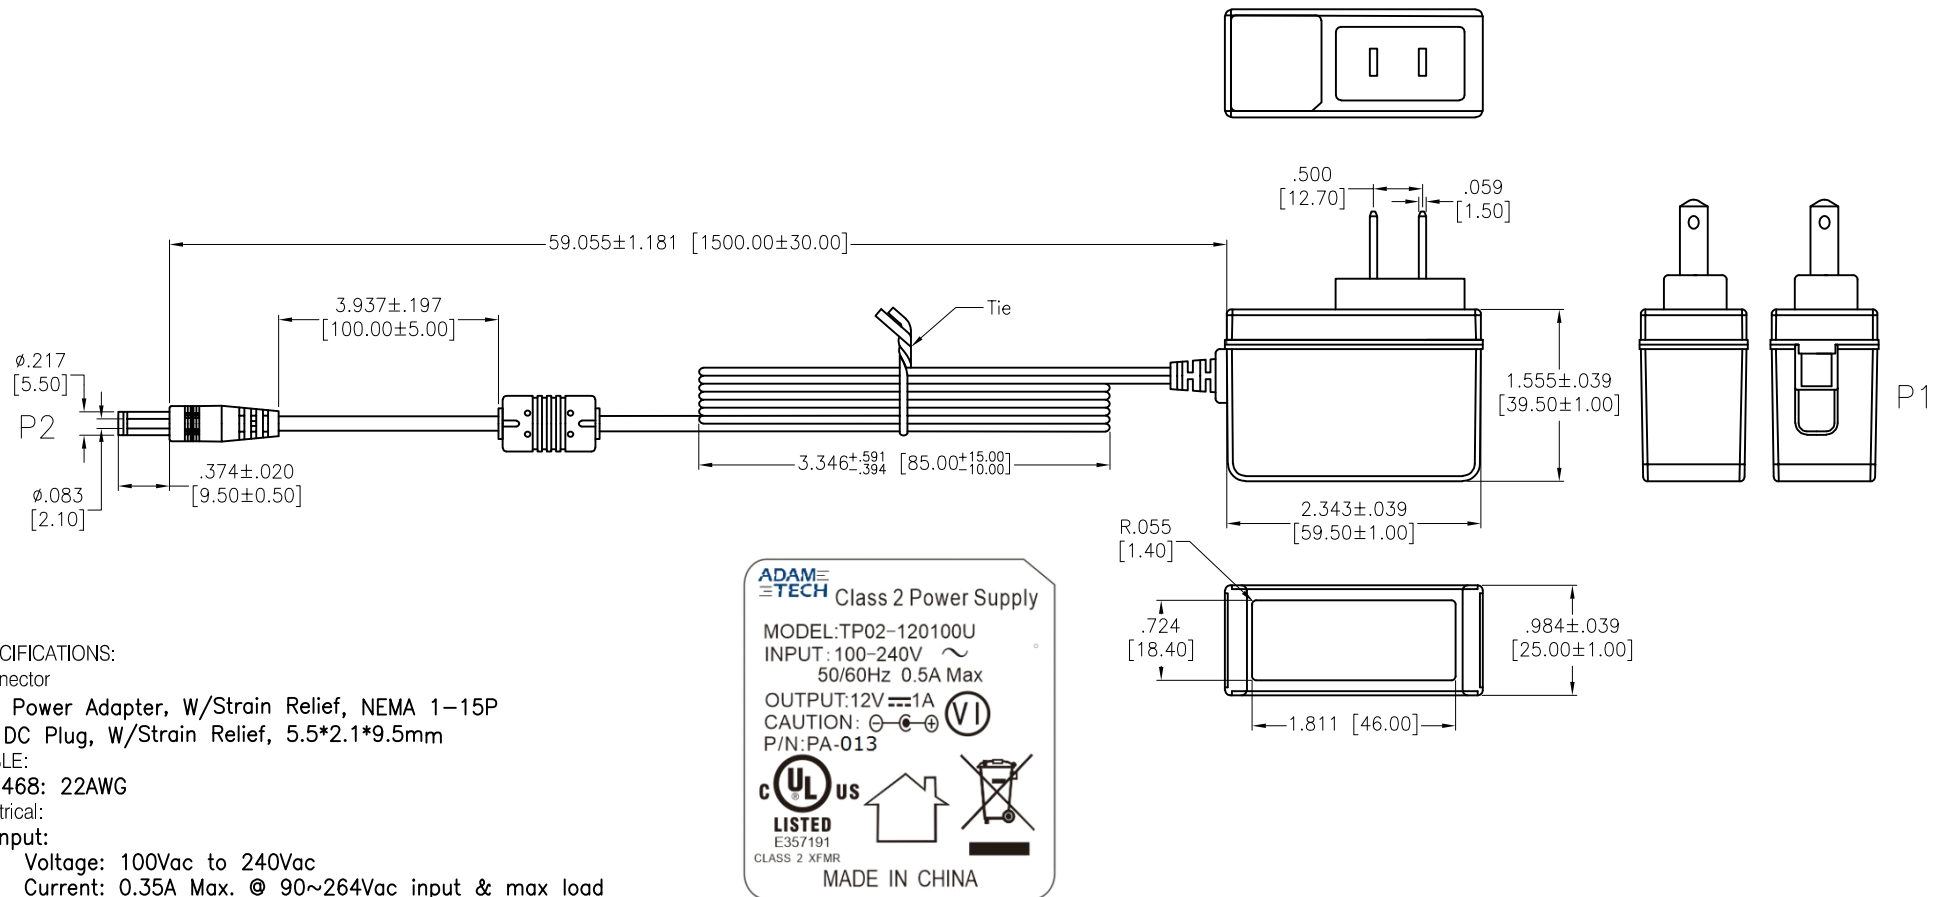

SPECIFICATIONS:

Connector

P1: Power Adapter, W/Strain Relief, NEMA 1-15P

P2: DC Plug, W/Strain Relief, 5.5*2.1*9.5mm

CABLE:

UL2468: 22AWG

Electrical:

Input:

Voltage: 100Vac to 240Vac

Current: 0.35A Max. @ 90~264Vac input & max load

Frequency: 50Hz / 60Hz

Output:

Voltage: 12V

Current: 1.0A max.

Line Regulation: ±5%

Fire rating: UL94V-0

Line Load Regulation-Output Rate: 12V, 1.0A

Insulator Resistance: 10 Mohms min @ 500VDC

Dielectric Strength(Hi-pot): 3000Vac For 1 Minute

Leakage Current: 0.25mAmax. @ 230Vac/50Hz

Temperature Rating:

Operating Temperature: 0°C to +40°C

Storage Temperature: -40°C to +70°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010

DRAWN	WX	3/24/21
CHECKED	AC	3/24/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE POWER ADAPTER, COLOR BLACK 12 VOLT, 1.0AMP, UL2468 22AWG, 5.5X2.1X9.5MM			REV. C	
SIZE X	PART NO. PA-013			
REF:	S00204C	SCALE:	NTS	SHEET 1 OF 1