

LXD35 series

LED Power Supply

Dimmable LED Power Supplies



LED Power
35W

LED POWER

next generation power source

FEATURES

- High Efficiency (up to 88%)
- Dimming Control
- Active PFC (Typical 0.92)
- IP67 Waterproof
- OVP, SCP
- -35 to 55°C deg operation
- Universal Input 90-305VAC
- UL8750 recognised
- EN61347-1, -2-13 compliant

The LXD35 series of dimmable LED power supplies from Excelsys Technologies can deliver up to 35W of output power in an extremely compact package size.

The LXD35 series of constant current power supplies provides up to 2900mA of output current and 100V output voltage solutions for specific LED requirements. With industry leading efficiencies, and an extensive protection feature set, the LXD35 series provides high reliability and high performance in a compact package

The LXD35 series carries the CE mark for safety and is also RoHS compliant.

For more details contact sales@excelsys.com

Model Number	Output Voltage	Output Current	Input Voltage	OVP Latching max	Efficiency	Ripple V
LXD35-0350SW	33-100V	350mA	90-305VAC	112V	87.0%	10V
LXD35-0450SW	26-78V	450mA	90-305VAC	87V	87.0%	8V
LXD35-0700SW(H)	17-50V	700mA	90-305VAC	59V	86.0%	5V
LXD35-1050SW(H)	11-33V	1050mA	90-305VAC	42V	86.0%	4V
LXD35-1400SW(H)	8-24V	1400mA	90-305VAC	32V	85.0%	4V
LXD35-1750SW(H)	7-20V	1750mA	90-305VAC	27V	84.0%	4V
LXD35-2100SW(H)	6-18V	2100mA	90-305VAC	25V	84.0%	4V
LXD35-2450SW(H)	5-15V	2450mA	90-305VAC	21V	83.0%	4V
LXD35-2900SW(H)	4-12V	2900mA	90-305VAC	18V	82.0%	4V

Input Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Universal Input	90		305	VAC
Input Frequency Range		47		63	Hz
Input Current	100VAC in, 35W output			0.49	A
Leakage Current	277VAC Input, 50Hz			0.5	mA
Inrush Current	230VAC in, 25°C, Cold Start			60	A
Power Factor	220VAC, 110VAC	0.92		0.98	

Output Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±3	%
Load Regulation				±5	%
Voltage Range	See individual models	50		100	%
Output Current Range		10		100	% I out
Ripple and Noise	See individual models				
Overshoot			10		%
Turn-on Delay	Measured at 220VAC and full load			3	s
Short Circuit Protection	Auto Recovery				
Over Voltage Protection	Hiccup, Auto recovery				

General Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note B Input to Chassis	3750 1500			VAC VAC
Efficiency	See individual models		88		%
Safety Agency Approvals	UL8750, EN61347-1, -2-13, UL1310 Note H				
No load Power Dissipation	Measured at 230 Vac			6.0	W
MTBF	MIL-HDBK-217F, 110VAC input, 80% load, 25°C		541,000		Hours
Lifetime	110VAC input, 80% load, 45°		87,000		Hours
Weight			480		g
Operating Temperature		-35		+55	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	10		100	%RH



Europe/Asia

Excelsys Technologies Ltd
27 Eastgate Drive
Eastgate Business Park
Little Island, Cork, Ireland
IRELAND

t: +353 21 4354716

f: +353 21 4354864

e: sales@excelsys.com

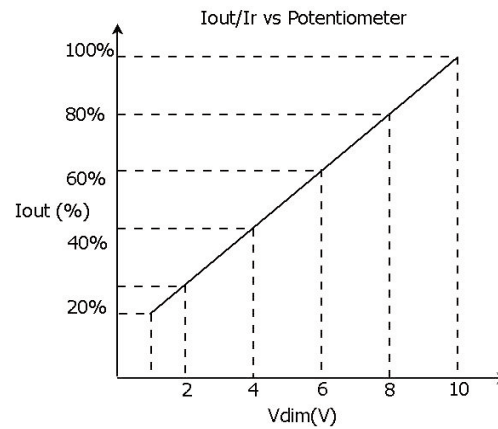
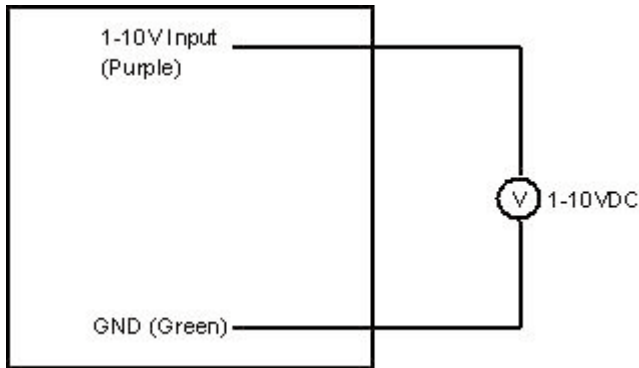
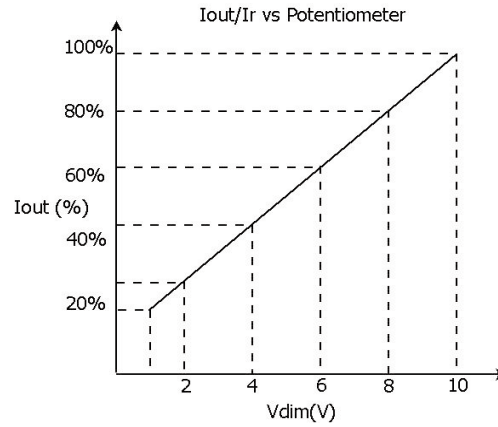
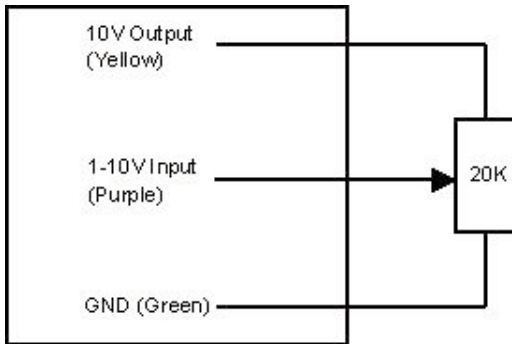
North America

Excelsys Technologies
519 Interstate 30, #309
Rockwall, TX 75087
USA

t: (972) 771 4544

f: (972) 421 1805

e: salesusa@excelsys.com

Dimming Implementation Diagrams**LED Power
35W**

Specifications are subject to change without notice

LXD35 datasheet Pre Release 14 March 2011

Europe/Asia

Excelsys Technologies Ltd
 27 Eastgate Drive
 Eastgate Business Park
 Little Island, Cork, Ireland
 IRELAND

t: +353 21 4354716

f: +353 21 4354864

e: sales@excelsys.com

North America

Excelsys Technologies
 519 Interstate 30, #309
 Rockwall, TX 75087
 USA

t: (972) 771 4544

f: (972) 421 1805

e: salesusa@excelsys.com