

## Intelligent MP Series

Up to 1500 Watts

**Total Power:** Up to 1500 Watts

**Input Voltage:** 85 - 264 Vac  
120-300 Vdc

**# of Outputs:** Up to 21

iMP®



### Special Features

- Full Medical EN60601 approval
- Intelligent I<sup>2</sup>C control
- Voltage adjustment on all outputs (Manual or I<sup>2</sup>C)
- Configurable input and output (case and module) OK signals and indicators
- Configurable inhibit/enable
- Configurable output UP/DOWN sequencing
- Configurable current limit (foldback or constant current)
- High power density (8.8 W/cu-in)
- Intelligent fan (speed control/fault status)
- Downloadable GUI from website
- Customer provided air option
- uP controlled PFC input with active inrush protection
- I<sup>2</sup>C monitor of voltage, current, and temp
- Programmable voltage, current limit, inhibit/enable through I<sup>2</sup>C
- Optional extended hold-up module (SEMI F47 compliance)
- Increased power density to 50% over standard MP
- External switching frequency sync input
- Optional conformal coating
- Industrial temp range (-40 °C to 70 °C)
- No preload required
- Industrial shock/vibration (> 50G's)

### Electrical Specifications

| Input                  |                                                                                                                                                                        |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input range:           | 85 - 264 Vac 120 - 350 Vdc<br>(limited to 300 Vdc in medical applications)                                                                                             |
| Frequency:             | 47 - 440 Hz                                                                                                                                                            |
| Inrush current:        | 40 A peak max. (soft start)                                                                                                                                            |
| Efficiency:            | Up to 85% @ full case load                                                                                                                                             |
| Power Factor:          | 0.99 typ. meets EN61000-3-2 (n/a @ 440 Hz)                                                                                                                             |
| Turn-on time:          | AC on 2.0 sec typ., inhibit/enable 150 ms typical<br>Programmable delay; 50 ms internal turn-on delay (Dual Output only)                                               |
| EMI filter:            | CISPR 22/EN55022 Level "B"***                                                                                                                                          |
| Leakage current:       | 300 µA max. @ 240 Vac; 47 - 63 Hz                                                                                                                                      |
| Radiated EMI:          | CISPR 22/EN55022 Level "B"***                                                                                                                                          |
| Holdover storage:      | 20 ms minimum (independent of input Vac) additional 34ms holdover storage with optional HUP module (SEMI F47 compatible). For iMP4 15 ms (low-line), 10 ms (high-line) |
| AC OK:                 | > 5 ms early warning min. before outputs lose regulation<br>Full cycle ride thru (50 Hz) (n/a on iMP4 > 750 W @ 90 Vac)                                                |
| Harmonic distortion:   | Meets EN61000-3-2                                                                                                                                                      |
| Isolation:             | Meets EN60950 and EN60601                                                                                                                                              |
| Global Inhibit/Enable: | TTL, Logic "1" and Logic "0"; configurable                                                                                                                             |
| Input fuse (internal): | iMP4: 16 A; iMP8: 20 A; iMP1: 25 A (both lines fused)                                                                                                                  |
| Warranty:              | 2 years                                                                                                                                                                |

### Safety

- **UL** UL60950/UL2601\*\*
- **CSA** CSA22.2 No. 234 Level 5
- **VDE** EN60950/EN60601-1\*\*
- **BABT** Compliance to EN60950/EN60601 BS7002
- **CB** Certificate and report
- **CE** Mark to LVD



## Output

|                                           |                                                                                                                                                                                                                                                  |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Adjustment range: *</b>                | ± 10% minimum all outputs (manual)<br>(full module adjustment range using I <sup>2</sup> C)                                                                                                                                                      |
| Factory set point accuracy:               | ± 1%                                                                                                                                                                                                                                             |
| I <sup>2</sup> C output program accuracy: | ± 5%                                                                                                                                                                                                                                             |
| Margining:                                | ± 4 - 6% nominal analog<br>(single output module only)                                                                                                                                                                                           |
| Overall regulation:                       | 0.4% or 20 mV max. (1500W modules 1% max.)<br>(36 W modules 4% maximum)                                                                                                                                                                          |
| Ripple:                                   | RMS: 0.1% or 10mV, whichever is greater<br>Pk-Pk: 1.0% or 50mV, whichever is greater<br>Bandwidth limited to 20 MHz                                                                                                                              |
| Dynamic response:                         | < 2% or 100 mV, with 25% load step                                                                                                                                                                                                               |
| Recovery time:                            | To within 1% in < 300 µsec                                                                                                                                                                                                                       |
| <b>Overcurrent protection: **</b>         | Configurable through I <sup>2</sup> C (calibration required).<br>Single output module and main output of the<br>dual output module 105 - 120% of rated output<br>current. Aux output of dual output module 105<br>- 140% of rated output current |
| Short-circuit protection:                 | Protected for continuous short-circuit<br>Recovery is automatic upon removal of short                                                                                                                                                            |
| <b>Overvoltage protection: *</b>          | Configurable through I <sup>2</sup> C                                                                                                                                                                                                            |
| Single output module:                     | 2 - 5.5 V 122 - 134%; 6 - 60 V 110 - 120%                                                                                                                                                                                                        |
| Dual output module:                       | 2 - 6 V 122 - 134%; 8 - 28 V 110 - 120%                                                                                                                                                                                                          |
| Triple output module:                     | 110 - 120% of highest voltage rating                                                                                                                                                                                                             |

## Output Continued

|                                                                  |                                                                                                                                                                    |
|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reverse voltage protection:                                      | 100% of rated output current                                                                                                                                       |
| <b>Thermal protection: *</b><br>(OTP and OTW)                    | Configurable through I <sup>2</sup> C<br>All outputs disabled when internal temp<br>exceeds safe operating range. > 5 ms warning<br>(AC OK signal) before shutdown |
| Remote sense:                                                    | Up to 0.5 V total drop (not available on triple<br>output module)                                                                                                  |
| Single wire parallel:                                            | Current share to within 2% of total rated<br>current                                                                                                               |
| DC OK: *                                                         | ± 5% of nominal. Configurable through I <sup>2</sup> C                                                                                                             |
| Minimum load:                                                    | Not required                                                                                                                                                       |
| Housekeeping standby:                                            | 5 Vdc @ 1.0 A max. present whenever AC input<br>is applied (Optional 2.0 A available)                                                                              |
| <b>Module inhibit: *</b>                                         | Configured and controlled through I <sup>2</sup> C                                                                                                                 |
| Switching frequency:                                             | 250k Hz accepts external sync signal                                                                                                                               |
| Output/Output isolation:                                         | >1 Megohm, 500 V                                                                                                                                                   |
| External sync:                                                   | TTL clock input signal used to adjust switching<br>frequency. Frequency 500 kHz ± 20%; Duty<br>cycle 40 - 55%                                                      |
| * Can be controlled via I <sup>2</sup> C                         |                                                                                                                                                                    |
| ** Controlled via I <sup>2</sup> C but requires load calibration |                                                                                                                                                                    |

## Environmental Specifications

|                                 |                                                                                                    |
|---------------------------------|----------------------------------------------------------------------------------------------------|
| Operating temperature:          | -40 ° to 70 °C ambient. Derate each output 2.5% per degree from 50 °C to 70 °C. ( -20 °C start up) |
| Storage temperature:            | -40 °C to 85 °C                                                                                    |
| Electromagnetic susceptibility: | Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3                                    |
| Humidity:                       | Operating; non-condensing 10% to 95% RH                                                            |
| Vibration:                      | IEC68-2-6 to the levels of IEC721-3-2                                                              |
| MTBF demonstrated               | > 550,000 hours at full load, 220 Vac and 25 °C ambient conditions                                 |

## Output Module Line-up

| Module Code                               | 1      | 2      | 3      | 5      | 4                                                                                                        | —                                                                         |
|-------------------------------------------|--------|--------|--------|--------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|
| Module Type                               | Single | Single | Single | Single | Dual                                                                                                     | Triple                                                                    |
| Max output power                          | 210 W  | 360 W  | 750 W  | 1500 W | 144 W                                                                                                    | 36 W                                                                      |
| Max output current                        | 35 A   | 60 A   | 150 A  | 140 A  | 10 A                                                                                                     | 2 A                                                                       |
| Output voltages available*                | 2-60 V | 2-60 V | 2-60 V | 6-60 V | 8 - 15*, 24 - 28; 8 - 15*, 8 - 15*; 8 - 15*,<br>2 - 6; 2 - 6, 2 - 6; 24 - 28, 24 - 28;<br>24 - 28, 2 - 6 | 8-15, 8-15, 2-6; 8-15, 8-15, 8-15;<br>8-15, 8-15, 18-28; 8-15, 18-28, 2-6 |
| Standard voltage increments               | 25     | 25     | 25     | 18     | 16                                                                                                       | 18                                                                        |
| Remote sense                              | Yes    | Yes    | Yes    | Yes    | Yes                                                                                                      | No                                                                        |
| Remote margin                             | Yes    | Yes    | Yes    | Yes    | No                                                                                                       | No                                                                        |
| V-Program - I <sup>2</sup> C Control      | Yes    | Yes    | Yes    | Yes    | Yes                                                                                                      | No                                                                        |
| Active Current Share                      | Yes    | Yes    | Yes    | Yes    | Yes                                                                                                      | No                                                                        |
| Module Inhibit - I <sup>2</sup> C Control | Yes    | Yes    | Yes    | Yes    | Yes                                                                                                      | Yes                                                                       |
| Module Inhibit - Analog                   | Yes    | Yes    | Yes    | Yes    | Yes                                                                                                      | No                                                                        |
| Overvoltage/Overcurrent protection        | Yes    | Yes    | Yes    | Yes    | Yes                                                                                                      | Yes                                                                       |
| Minimum load required                     | No     | No     | No     | No     | No                                                                                                       | No                                                                        |
| Slots occupied in any iVS case            | 1      | 2      | 3      | 4      | 1                                                                                                        | 1                                                                         |

\* Note: Contact Factory for extended range down to 6 V

# Output Module Voltage/Current

Rev.03.23.11\_77  
iMP Series  
3 of 9

| Voltage | Voltage Code | Single Output Module Code |        |        |                | Dual Output*** |       | Triple Output |       |       | I <sup>2</sup> C Adjustment Ranges**** |
|---------|--------------|---------------------------|--------|--------|----------------|----------------|-------|---------------|-------|-------|----------------------------------------|
|         |              | 1                         | 2      | 3      | 5 <sup>+</sup> | 4              | 4     | -             | -     | -     |                                        |
| 2 V     | A            | 35 A                      | 60 A   | 150 A  | —              | 10 A           | 10 A  | —             | —     | 2 A   | 1.8 - 2.2                              |
| 2.2 V   | B            | 35 A                      | 60 A   | 150 A  | —              | 10 A           | 10 A  | —             | —     | 2 A   | 2.0 - 2.4                              |
| 3 V     | C            | 35 A                      | 60 A   | 150 A  | —              | 10 A           | 10 A  | —             | —     | 2 A   | 2.7 - 3.3                              |
| 3.3 V   | D            | 35 A                      | 60 A   | 150 A  | —              | 10 A           | 10 A  | —             | —     | 2 A   | 3.0 - 3.6                              |
| 5 V     | E            | 35 A                      | 60 A   | 150 A  | —              | 10 A           | 10 A  | —             | —     | 2 A   | 4.5 - 5.5                              |
| 5.2 V   | F            | 35 A                      | 60 A   | 144 A  | —              | 10 A           | 10 A  | —             | —     | 2 A   | 4.7 - 5.7                              |
| 5.5 V   | G            | 34 A                      | 58 A   | 136 A  | —              | 10 A           | 10 A  | —             | —     | 2 A   | 5.0 - 6.1                              |
| 6.0 V   | H            | 23 A                      | 42 A   | 97.5 A | 140 A          | 10 A*          | 10 A* | —             | —     | 2 A   | 5.4 - 6.6                              |
| 8.0 V   | I            | 20 A                      | 36 A   | 84.4 A | 140 A          | 10 A           | 4 A   | 1 A           | 1 A   | 1 A   | 7.2 - 8.8                              |
| 10 V    | J            | 18 A                      | 32 A   | 75 A   | 140 A          | 10 A           | 4 A   | 1 A           | 1 A   | 1 A   | 9.0 - 11.0                             |
| 11 V    | K            | 17 A                      | 31 A   | 68 A   | 136.3 A        | 10 A           | 4 A   | 1 A           | 1 A   | 1 A   | 9.9 - 12.1                             |
| 12 V    | L            | 17 A                      | 30 A   | 62.5 A | 125 A          | 10 A           | 4 A   | 1 A           | 1 A   | 1 A   | 10.8 - 13.2                            |
| 14 V    | M            | 14 A                      | 21 A   | 53.5 A | 107 A          | 9 A            | 4 A   | 1 A           | 1 A   | 1 A   | 12.6 - 15.4                            |
| 15 V    | N            | 14 A                      | 20 A   | 50 A   | 100 A          | 8 A            | 4 A   | 1 A           | 1 A   | 1 A   | 13.5 - 16.5                            |
| 18 V    | O            | 11 A                      | 19 A   | 41.6 A | 83.3 A         | —              | —     | —             | 0.5 A | 0.5 A | 16.2 - 19.8                            |
| 20 V    | P            | 10.5 A                    | 18 A   | 37.5 A | 75 A           | —              | —     | —             | 0.5 A | 0.5 A | 18.0 - 22.0                            |
| 24 V    | Q            | 8.5 A                     | 15 A   | 30 A   | 62.5 A         | 4 A            | 2 A   | —             | 0.5 A | 0.5 A | 21.6 - 26.4                            |
| 28 V    | R            | 6.7 A                     | 11 A   | 26.8 A | 53.5 A         | 3 A            | 2 A   | —             | 0.5 A | 0.5 A | 25.2 - 30.8                            |
| 30 V    | S            | 6.5 A                     | 11 A   | 25 A   | 50 A           | —              | —     | —             | —     | —     | 27.0 - 33.0                            |
| 33 V    | T            | 6.2 A                     | 10.9 A | 22.7 A | 35.8 A         | —              | —     | —             | —     | —     | 29.7 - 36.3                            |
| 36 V    | U            | 5.8 A                     | 10 A   | 20.8 A | 35.8 A         | —              | —     | —             | —     | —     | 32.4 - 39.6                            |
| 42 V    | V            | 4.2 A                     | 7.5 A  | 16 A   | 35.7 A         | —              | —     | —             | —     | —     | 37.8 - 46.2                            |
| 48 V    | W            | 4.0 A                     | 7.5 A  | 15.6 A | 31.2 A         | —              | —     | —             | —     | —     | 43.2 - 52.8                            |
| 54 V    | X            | 3.7 A                     | 6.0 A  | 13.9 A | 27.7 A         | —              | —     | —             | —     | —     | 48.6 - 59.4                            |
| 60 V    | Y            | 3.5 A                     | 6.0 A  | 12.5 A | 25 A           | —              | —     | —             | —     | —     | 54.0 - 66.0                            |

**Non-std\*\*** Z Special Voltage - Consult Factory for specifications

\*Note: Contact Factory for extended range down to 6 V.

\*\*Increments of current not shown can be achieved by paralleling modules

(add currents of each module selected).

\*\*\*Total output power on dual module must not exceed 144 W.

\*\*\*\* For single output modules only.

+ Applicable for iMP1 only.

## Ordering Note:

1. The cases and modules of both MP and iMP series can be interchanged to allow more flexibility. If intelligent modules are used with non-intelligent cases, a numeric code "4" is placed at the end of the module code (ex. 4LL0 becomes 4LL4).

2. USB to I<sup>2</sup>C module order code 73-769-001

## Parallel Codes

| Slot 7 | Slot 6 | Slot 5 | Slot 4 | Slot 3 | Slot 2 | Slot 1 |                         |
|--------|--------|--------|--------|--------|--------|--------|-------------------------|
|        |        |        |        |        |        |        | iMP4 available slots    |
|        |        |        |        |        |        |        | iMP8 available slots    |
|        |        |        |        |        |        |        | iMP1 available slots    |
| 7      | 6      | 5      | 4      | 3      | 2      | 1      |                         |
| ●      | ●      | ●      | ●      | ●      | ●      | ●      | 0 = no parallel         |
| ●      | ●      | ●      | ●      | ●      | ●      | —      | 1 = 1 & 2               |
| ●      | ●      | ●      | ●      | ●      | —      | —      | 2 = 2 & 3               |
| ●      | ●      | ●      | ●      | —      | —      | —      | 3 = 3 & 4               |
| ●      | ●      | ●      | —      | —      | —      | —      | 4 = 4 & 5               |
| ●      | ●      | —      | —      | —      | —      | —      | 5 = 3 & 4 & 5           |
| ●      | —      | —      | —      | —      | —      | —      | 6 = 5 & 6               |
| —      | —      | —      | —      | —      | —      | —      | 7 = 4 & 5 & 6           |
| —      | —      | —      | —      | —      | —      | —      | 8 = 6 & 7               |
| —      | —      | —      | —      | —      | —      | —      | 9 = 3 & 4, 6 & 7        |
| —      | —      | —      | —      | —      | —      | —      | A = 1 & 2, 3 & 4, 5 & 6 |
| —      | —      | —      | —      | —      | —      | —      | C = 2 & 3, 4 & 5        |
| —      | —      | —      | —      | —      | —      | —      | E = 3 & 4, 5 & 6        |

## Ordering Information

| Case Size                                                                                                                                                                                                                                                                                                                                | Module/Voltage/Option Codes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Case Option Codes                                                                                                                                                                                                                                                                                                                                       | Software Code                                                | Hardware Code                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------|
| <b>iMP1*</b>                                                                                                                                                                                                                                                                                                                             | <b>3L0 - 2E2 - 1Q1 - 4LL0</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <b>00</b>                                                                                                                                                                                                                                                                                                                                               | <b>A</b>                                                     | <b>###</b>                                       |
| <b>Case Size (mm)</b><br>4 = 2.5" x 5" x 10"; 750 W-1100 W, 5 Slots (63.5 x 127 x 254)<br>8 = 2.5" x 7" x 10"; 1000 W-1200 W, 6 Slots (63.5 x 177.8 x 254)<br>1 = 2.5" x 8" x 11"; 1200 W-1500 W, 7 Slots (63.5 x 203.2 x 279.4)<br><br>*Note: Add "E" after iMP4 to denote IEC input option. e.g. iMP4E (Not available on iMP8 or iMP1) | <b>Module Codes</b><br>Module/voltage/option codes<br>Module codes:<br>(None) = 36 W triple O/P (1 slot)<br>1 = 210 W single O/P (1 slot)<br>2 = 360 W single O/P (2 slot)<br>3 = 750 W single O/P (3 slot)<br>4 = 144 W dual O/P (1 slot)<br>5 = 1500 W single O/P (4 slot)<br>6 - 9 = future<br><b>Voltage Codes:</b><br>See Output Module Voltage/Current table above<br><b>Option Codes:</b><br>0 = Standard<br>1 = Module enable<br>2 = Constant current<br>3 = 1 & 2 combined<br>4 = Set for use in standard (non-intelligent case)<br>5 = Shutdown mode for 1500W<br>6 = 1 & 5 combined<br>7 - 9 = future | <b>Case Option Codes</b><br><br>First digit<br>0 - 9 = parallel code (See Parallel Codes table above)<br><br>Second digit<br>0 = No options<br>1 = Reverse air<br>3 = Global enable<br>4 = Fan off w/inhibit*<br>5 = Opt 1 + Opt 3<br>6 = Opt 1 + Opt 4<br>7 = Opt 3 + Opt 4<br>8 = Opt 1 + 3 + 4<br>9 = CAN BUS/RS485 73-544-002<br>B = USB 73-546-002 | Software code used for configuration change. "A" is standard | Factory assembled for hardware of firmware mods. |

\* Fan will cycle on and off at very low speed as environmental conditions dictate.

## Single



210 W



360 W



750 W



1500 W

## Dual




144 W

## Triple



36 W


### iMP4 (AC input on opposite side)

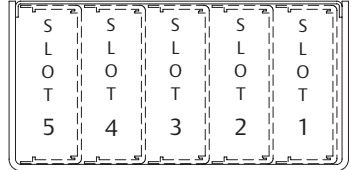

iMP4 = 2.5" x 5" x 10" 5 available slots  
(63.5 x 127 x 254)

### iMP8 and iMP1

AC input

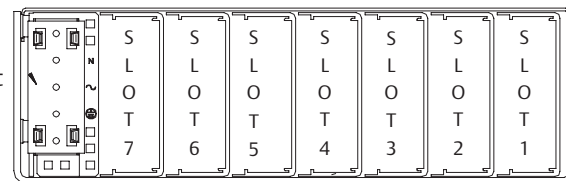

iMP1 only

iMP8 = 2.5" x 7" x 10" 6 available slots  
(63.5 x 177.8 x 254mm)

iMP1 = 2.5" x 8" x 11" 7 available slots  
(63.5 x 203.2 x 279.4mm)

Input  
90-264 Vac 750 W max. 180-264 Vac 1100 W max.

Input  
85-264 Vac 1000 W max. 180-264 Vac 1200 W max.


1200 W max. 1500 W max.

## Pin Connectors

Figure 1. AC Input




Figure 2. Connector J1



Mates with  
Molex 90142-0010 Housing  
90119-2110 Pin  
Connector Kit Part No.:  
70-841-004

Figure 3. Connector J2



Mates with  
Landwin 2050S1000 Housing  
2053T011V Pin  
or  
JST PHDR-10VS Housing  
JST SPHD-002T-P0.5 (28-24)  
JST SPHD-001T-P0.5 (26-22)

Connector Kit Part No.:  
70-841-023

### AC Input

| Pin No. | Function               |
|---------|------------------------|
| 1       | AC neutral             |
| 2       | AC line (hot)          |
| 3       | Chassis (earth) ground |

### PFC Input Connector (control and signals)

| Pin No. | Function                                 |
|---------|------------------------------------------|
| 1       | Input AC OK - "emitter"                  |
| 2       | Input AC OK - "collector"                |
| 3       | Global DC OK - "emitter"                 |
| 4       | Global DC OK - "collector"               |
| 5       | External Sync                            |
| 6       | Global inhibit/optional enable logic "0" |
| 7       | Global inhibit/optional enable logic "1" |
| 8       | Global inhibit/optional enable return    |
| 9       | +5 VSB housekeeping                      |
| 10      | +5 VSB housekeeping return               |

### PC Bus Output Connector

| Pin No. | Function                        |
|---------|---------------------------------|
| 1       | No connection                   |
| 2       | No connection                   |
| 3       | No connection                   |
| 4       | Serial clock signal (SCL)       |
| 5       | Serial data signal (SDA)        |
| 6       | Address bit 0 (A0)              |
| 7       | Address bit 1 (A1)              |
| 8       | Address bit 2 (A2)              |
| 9       | Secondary return (GND)          |
| 10      | 5 Vcc external bus (5 VCC. Bus) |


## iMP Modules DC-DC Converter Output Modules

Control Signal Information, J1 Control Connector

| Pin No. | Function                    |                           |
|---------|-----------------------------|---------------------------|
| 1       | + Remote Sense              | single or dual o/p main   |
| 2       | Remote Margin / V. Program  | single o/p                |
| 3       | Margin High                 | single o/p                |
| 4       | - Remote Sense / Margin Low | single or dual o/p main   |
| 5       | Spare                       |                           |
| 6       | Module, Isolated Inhibit    | single or dual o/p        |
| 7       | Module Inhibit return       | single or dual o/p        |
| 8       | Current Share (SWP)         | single or dual o/p main   |
| 9       | + Remote Sense V2           | dual o/p, single is spare |
| 10      | - Remote Sense V2           | dual o/p, single is spare |


\* Note: All iMP modules have a green DCOK LED.  
(except for 36 W module)

Figure 4. Connector J1




Mates with  
Molex 90142-0010 Housing  
90119-2110 Pin


### Single 210 Watt

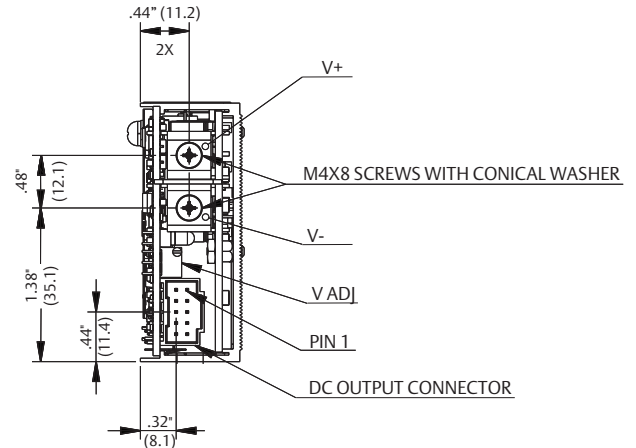


### Single 360 Watt

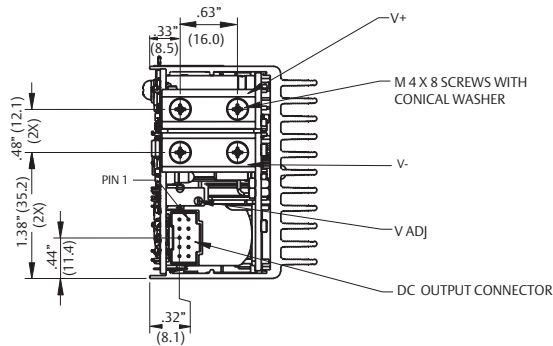


### Single 750 Watt

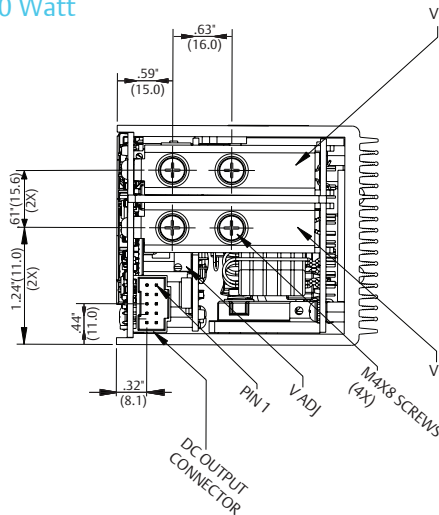


### Single 1500 Watt

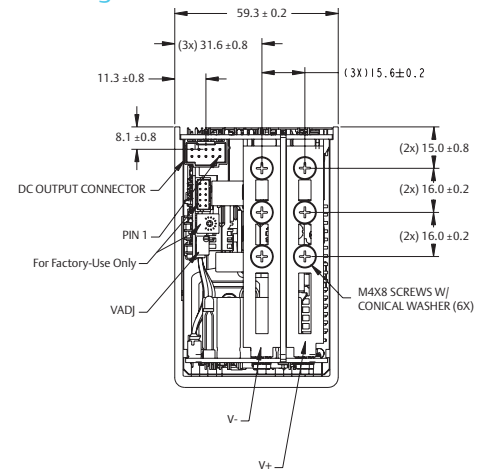

### Dual 144 Watt

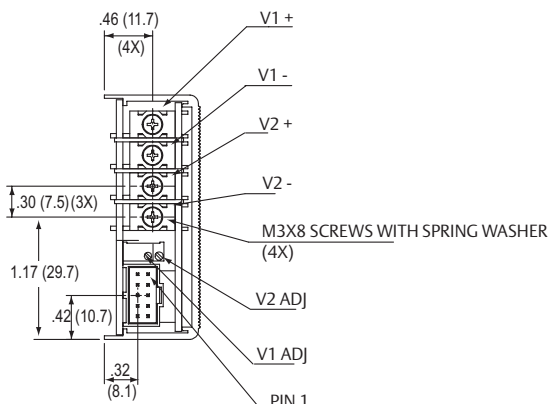


### Triple 36 Watt

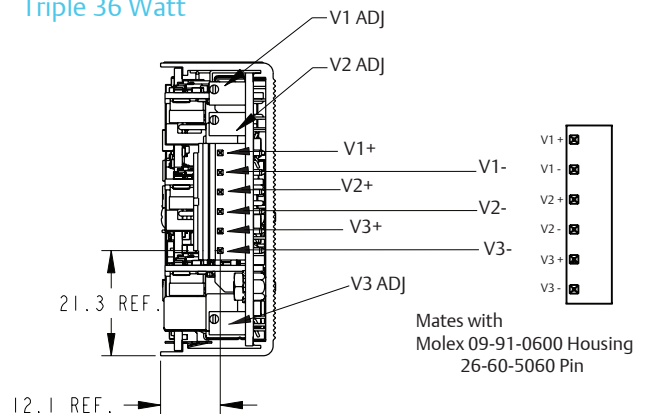

## iMP Series iMP4 (750/1100 Watts Max)

5-Inch Case Size: iMP4: 2.5" x 5" x 10" (63.5mm x 127mm x 254mm)  
Weight: iMP4 Case: 3 lbs. • 360 W Single 1.0 lb.  
• 750 W Single: 1.6 lbs. 144 W Dual: 0.6 lb.

Rev.03.23.11\_77  
iMP Series  
6 of 9

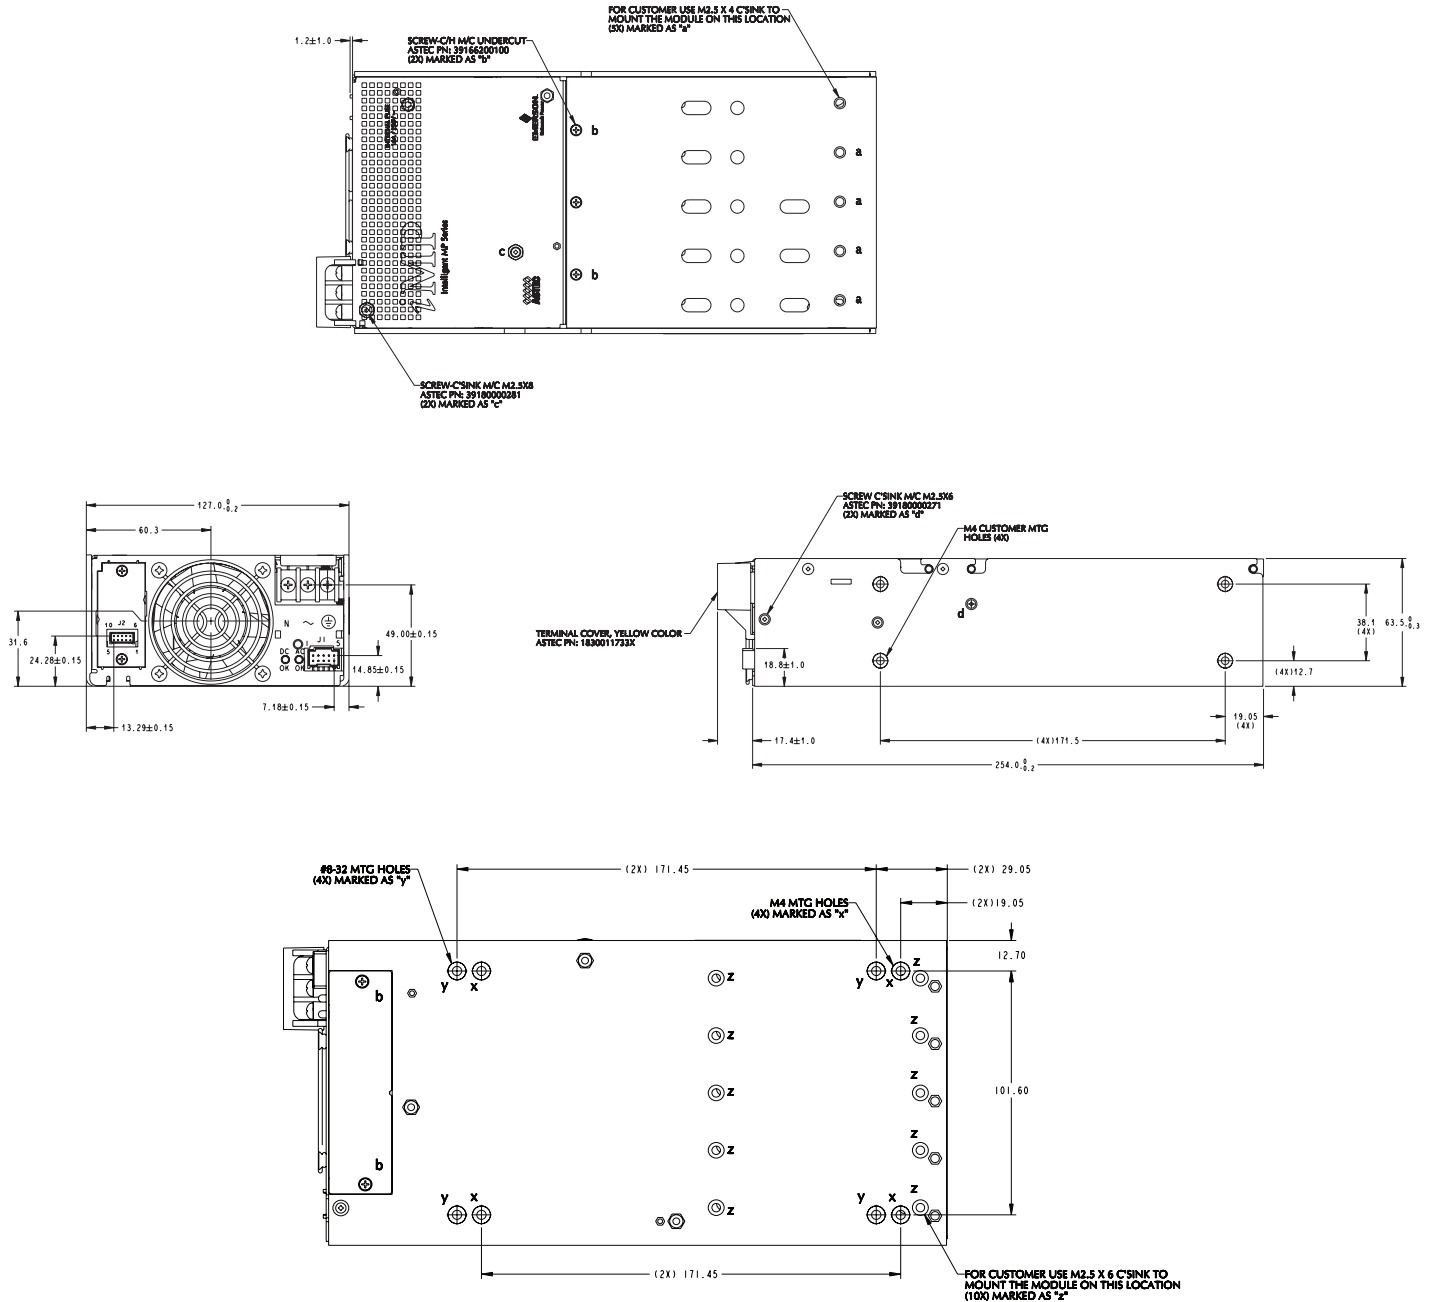


## Notes

1. Input: Barrier type. Three No. 6-32 B.H. screws (0.375" centers). Max torque: 6 in-lbs. (0.67 N-m). (Optional IEC input connector)
2. Control connectors: (J1) 10 position housing, gold plated contacts. Mates with Molex 90142-0010 housing with 90119-2110 crimp contacts (Molex C - Grid III Series). Connector kit includes mating connector and 10 pins, Astec part #70-841-004. (J2) 10 position housing (Landwin 2051P1000T). Mates with housing 2050S1000 (Landwin) with 2053T011P (Landwin) pins or JST PHDR-IOVS Housing and JST SPHD-002T-PO.5 pins.
3. Chassis material: aluminum with chemical film coating (conductive).
4. All dimensions are in millimeters and inches, and are typical.
5. Customer mounting -3 sides M4, bottom also includes 8-32 mounting holes. Max. penetration is 0.150" (3.8 mm). Max. torque: 5 in-lbs. (0.57 N-m).
6. Output module connections: All single O/P modules are M4 x 8mm screws. Max. torque: 10 in-lbs. (1.13 N-m). Dual O/P module is M3 x 8mm screws. Max. torque: 5 in-lbs. (0.57 N-m).

## iMP Series iMP8 (1000/1200 Watts Max)

7-Inch Case Size: iMP8: 2.5" x 7" x 10" (63.5mm x 177.8mm x 254mm)  
Weight: iMP8 Case: 4.1 lbs. • 210 W Single: 0.6 lb. • 360 W Single: 1.0 lb.  
• 750 W Single: 1.6 lbs. 144 W Dual: 0.6 lb.

Rev.03.23.11\_77  
iMP Series  
7 of 9

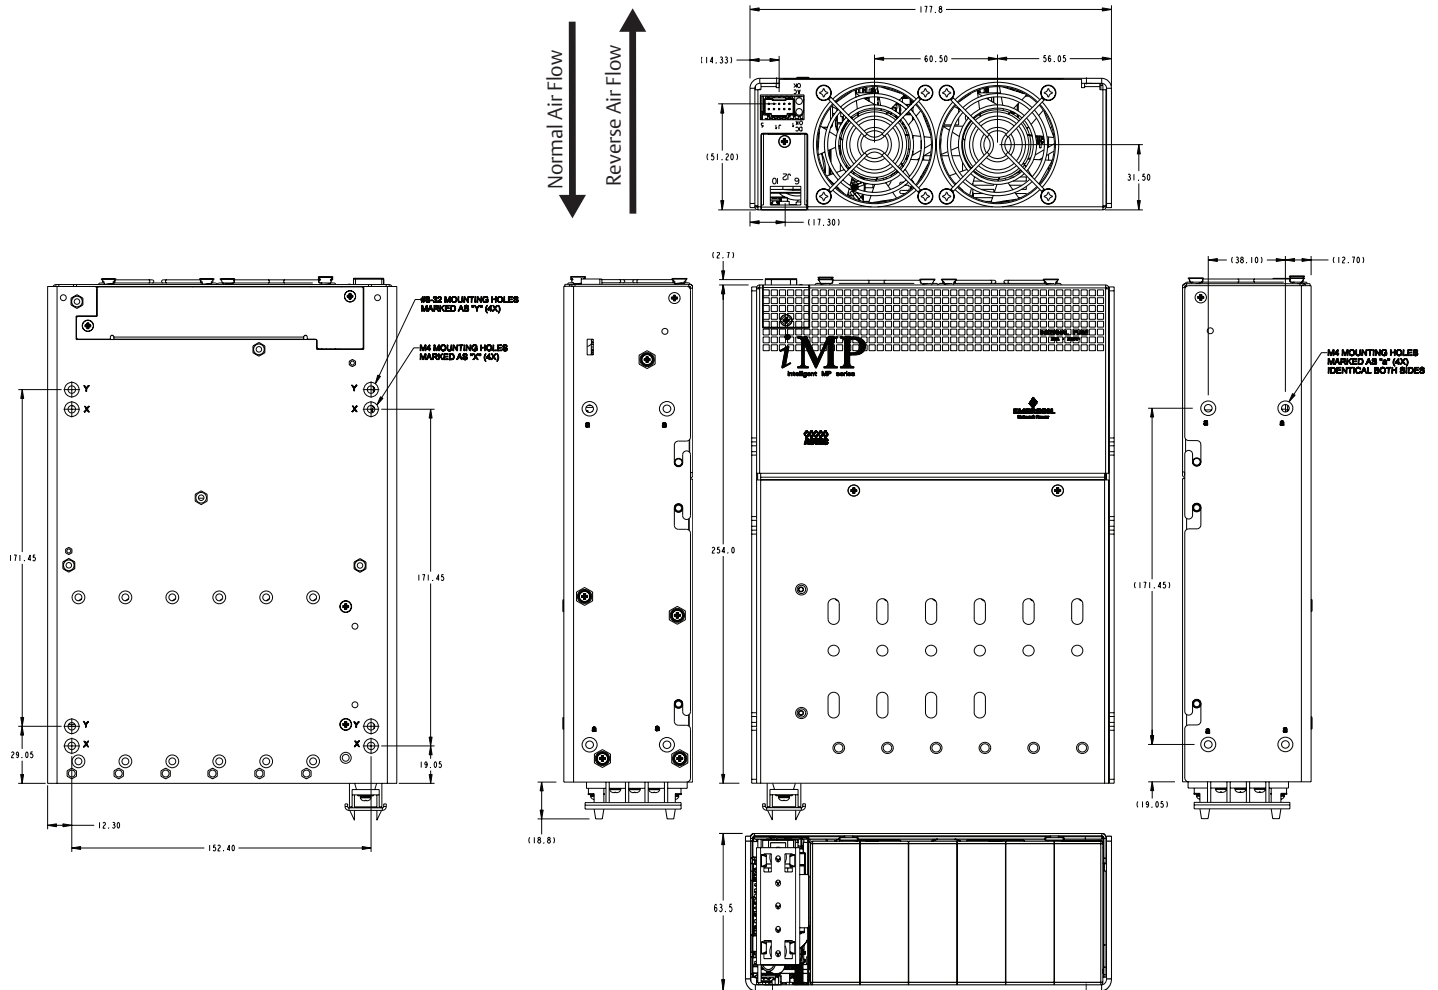


## Notes

1. Input: Barrier type. Three No. 6-32 B.H. screws (0.375" centers). Max torque: 6 in-lbs. (0.67 N-m).
2. Control connectors: (J1) 10 position housing, gold plated contacts. Mates with Molex 90142-0010 housing with 90119-2110 crimp contacts (Molex C - Grid III Series) Connector kit includes mating connector and 10 pins, Astec part #70-841-004. (J2) 10 position housing (Landwin 2051P1000T). Mates with housing 2050S1000 (Landwin) with 2053T011P (Landwin) pins or JST PHDR-IOVS Housing and JST SPHD-002T-PO.5 pins.
3. Chassis material: aluminum with chemical film coating (conductive).
4. All dimensions are in millimeters and inches, and are typical.
5. Customer mounting -3 sides M4, bottom also includes 8-32 mounting holes. Max. penetration is 0.150" (3.8 mm). Max. torque: 5 in-lbs. (0.57 N-m).
6. Output module connections: All single O/P modules are M4 x 8mm screws. Max. torque: 10 in-lbs. (1.13 N-m).  
Dual O/P module is M3 x 8mm screws. Max. torque: 5 in-lbs. (0.57 N-m).

## iMP Series iMP1 (1200/1500 Watts Max)

8-Inch Case Size: iMP1: 2.5" x 8" x 11" (63.5mm x 203.2mm x 279.4mm)  
Weight: iMP1 Case: 5.0 lb. • 210 W Single: 0.6 lb.  
• 360 W Single: 1.0 lb. • 750 W Single: 1.6 lb.  
• 144 W Dual: 0.6 lb.

Rev.03.23.11\_77  
iMP Series  
8 of 9

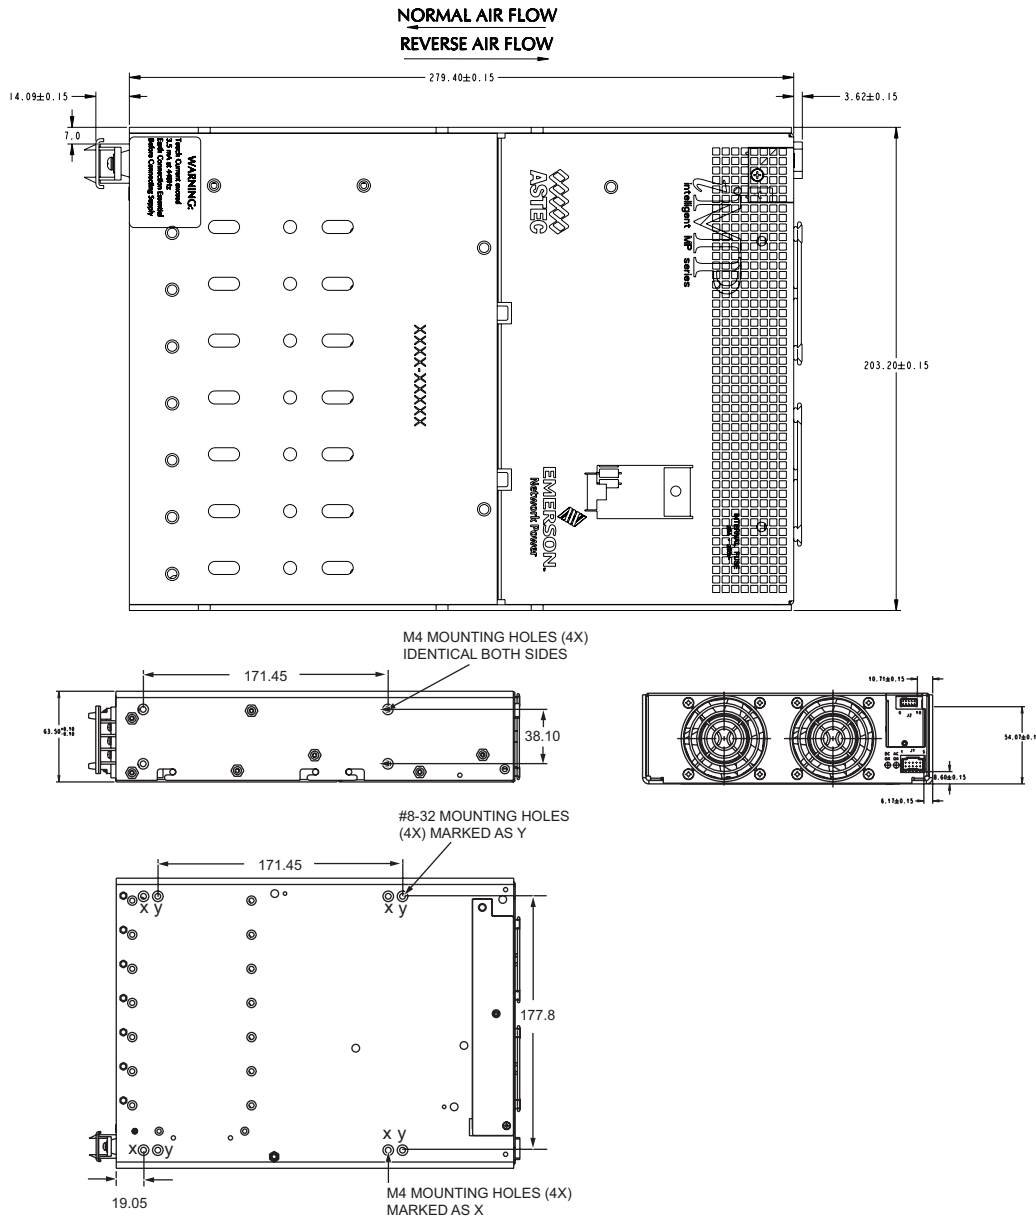

## Notes


1. Input: Barrier type. Three No. 6-32 B.H. screws (0.375" centers). Max torque: 6 in-lbs (0.67 N-m).
2. Control connectors: (J1) 10 position housing, gold plated contacts. Mates with Molex 90142-0010 housing with 90119-2110 crimp contacts (Molex C - Grid III Series). Connector kit includes mating connector and 10 pins, Astec part #70-841-004. (J2) 10 position housing (Landwin 2051P1000T). Mates with housing 2050S1000 (Landwin) with 2053T011P (Landwin) pins or JST PHDR-IOVS Housing and JST SPHD-002T-PO.5 pins.
3. Chassis material: aluminum with chemical film coating (conductive).
4. All dimensions are in millimeters and inches, and are typical.
5. Customer mounting -3 sides M4, bottom also includes 8-32 mounting holes. Max. penetration is 0.150" (3.8 mm). Max. torque: 5 in-lbs. (0.57 N-m).
6. Output module connections: All single O/P modules are M4 x 8mm screws. Max. torque: 10 in-lbs. (1.13 N-m). Dual O/P module is M3 x 8mm screws. Max. torque: 5 in-lbs. (0.57 N-m).

## Optional CANBUS or RS485 Interface

The RS485/CAN-to-I<sup>2</sup>C uses 2 Input Protocols and 1 Output Protocol.


The Input Protocols used are RS485 using Modbus (Command Index: 0x01), and CAN using modified Modus (Command Index: 0x02).

The Output Protocol use is: I<sup>2</sup>C with SMBus support (Command Index: 0x80).

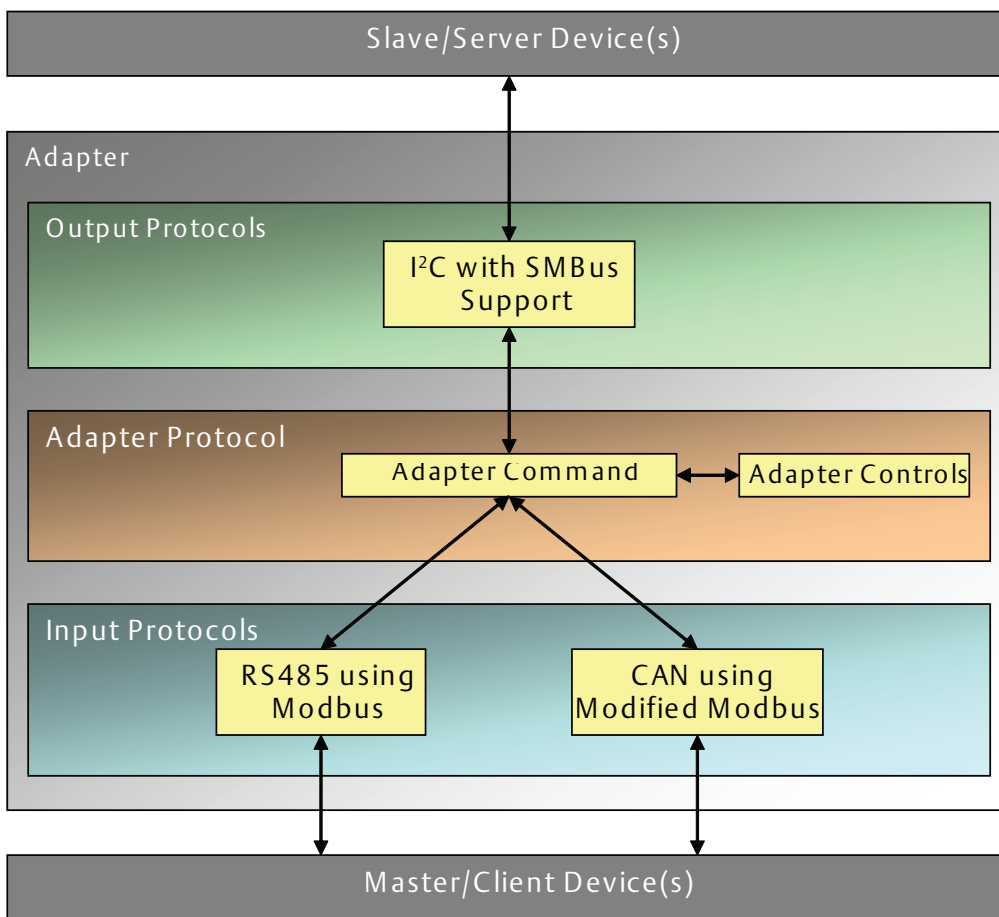

RS485/CAN - to - I2C

For Detailed Info, Download the Software Requirements Specification (SRS) from  
[www.PowerConversion.com/imp](http://www.PowerConversion.com/imp)

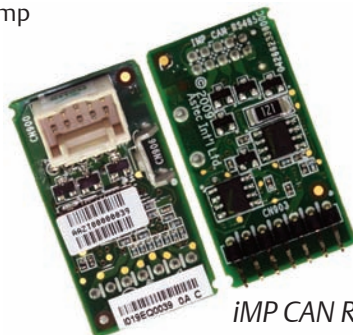

### Americas

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698

### Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
Telephone: +852 2176 3333  
Facsimile: +852 2176 3888

For global contact, visit:

[www.Emerson.com/EmbeddedPower](http://www.Emerson.com/EmbeddedPower)  
[techsupport.embeddedpower@emerson.com](mailto:techsupport.embeddedpower@emerson.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

### Emerson Network Power.

The global leader in enabling business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Computing
- **Embedded Power**
- Monitoring
- Outside Plant
- Power Switching & Controls
- Precision Cooling
- Racks & Integrated Cabinets
- Services
- Surge Protection

### EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2011 Emerson Electric Co.