


■ Features

- Power Rating: 75W
- Input Voltage: 100-277Vac
- Constant current and constant voltage hybrid output
- Output current (300mA-3130mA)
- Output current programmable with Near Field Communication controller
- Efficiency to 95%
- Compatible with 0-10V, PWM, Timer, Dim-to-off option, 12V/200mA AUX
- CE certified
- Class 2 options available, Type HL, Type TL
- Lightning, OVP, SCP, OTP, & Over Current Protection
- IP67
- 5-year warranty
- Surge Protection: Diff: 6kV, Common: 10kV



*Near Field Communication controller

RoHS
Compliant



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor and outdoor applications

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency 110V/220V	Certification
L2WCP075S313ST*-XYZ	100-277Vac	75W	24-48V	1250mA	3130mA	87%/89%	CE
L2WCP075S156ST-XYZ	100-277Vac	75W	48-80V	630mA	1560mA	89%/90%	CE
L2WCP075S075ST-XYZ	100-277Vac	75W	100-200V	300mA	750mA	90%/92%	CE

*Class 2 output. (Add-J for J-Box, Ex.) L2WCP075SXXXST-J-XYZ; Contact Autec Sales for all options.)

Ordering options	
XY= Programmable	Z=Dimming
FC=Near Field Communication	D=DALI Dimming
	B=BLE Dimming

■ Technical Data

Input voltage range	100-277Vac
Frequency	47-63Hz
Power factor	> 0.99 @115Vac & 80~100% Full load, > 0.95 @230Vac & 80~100% Full load
Output voltage	24-200V
Output power	75W
Ripple and Noise	3.0%Vo
Max input current	0.79A @115Vac, 0.38A@230Vac
Max input Power	75W
Efficiency	87-92%

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

July 12, 2019

■ Technical Data(cont.)

Line Regulation	$\pm 0.5\%$
Load Regulation	$\pm 3\%$
Inrush Current	65A @230Vac cold start +25°C
Dimming	0~10V/ PWM/ Timer, Dim-to-off option
THD	< 20%
Current Programmable	Yes
Output Current Programmable Range	300-3130mA
Over Current Protection	Protection type: Constant current limiting, recovers automatically after fault condition is removed
Short Current Protection	Hiccup mode, recovers automatically after fault condition is removed
Over Voltage Protection	1.3Vo, Protection type: Hiccup mode, recovers automatically after fault condition is removed
Over Temp. Protection	Hiccup mode, recovers automatically after fault condition is removed
Operating Temperature	-35~+70°C
Max T-case Temp.	85°C
Operating Humidity	10 ~ 100% RH non-condensing
Storage Temp., Humidity	-40 ~+85°C, 5 ~ 100% RH
Temp. Coefficient	$\pm 0.05\%/^{\circ}\text{C}$ (0~50°C)
Vibration	10~500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes
Dimensions	171x70x37mm
Dimensions(With Tabs)	188x70x37mm
Packing	25pcs/carton
Weight	630.3g

■ Safety Compliance

Safety Standards	UL8750, UL935, UL1012, CSA-C22.2 No.107.1, EN61347-1, EN61347-2-13
Withstand Voltage	I/P – O/P: 3.75kVAC
Isolation Resistance	I/P – O/P: 100M Ohms / 500VDC /25°C / 70% RH
EMC Emission	Compliance to EN55015, EN61000-3-2 Class C ($\geq 60\%$ load); EN61000-3-3
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, EN55024

Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


July 12, 2019

2 / 8


■ Derating curve

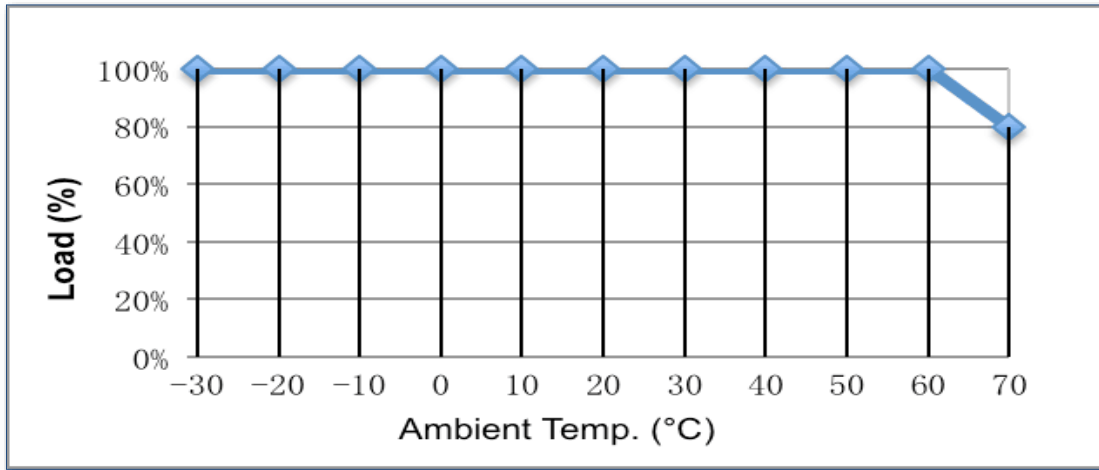

■ Static Characteristics

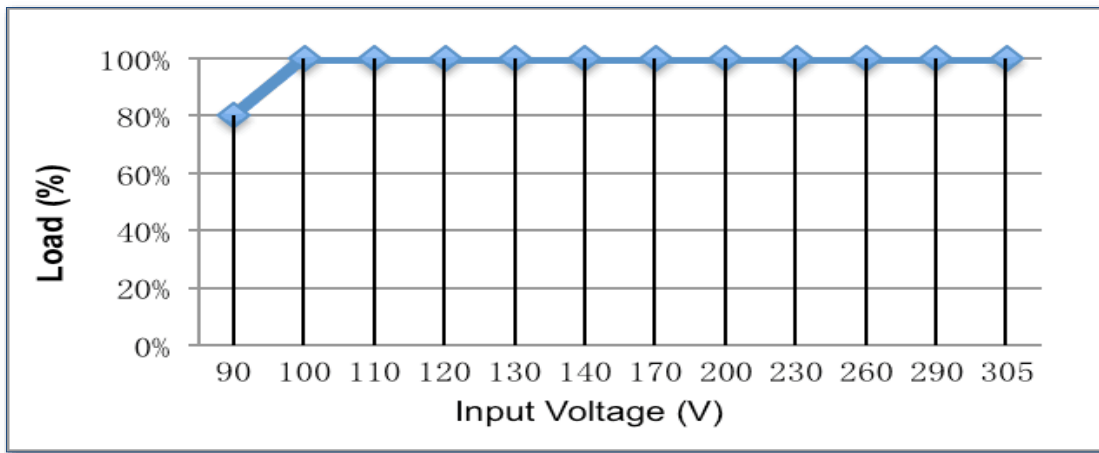

■ Power Factor vs. Output

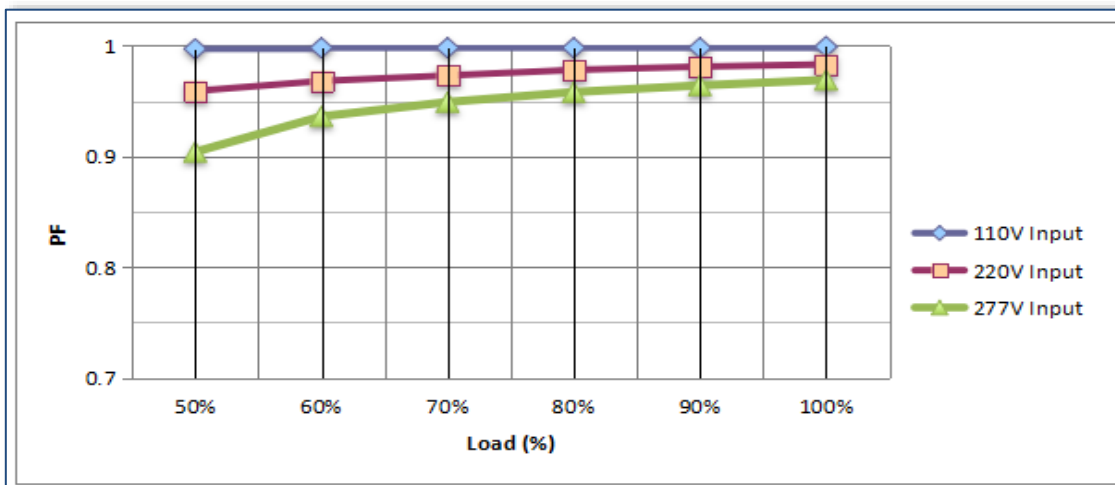


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com


31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

July 12, 2019


■ **THD vs. Output**

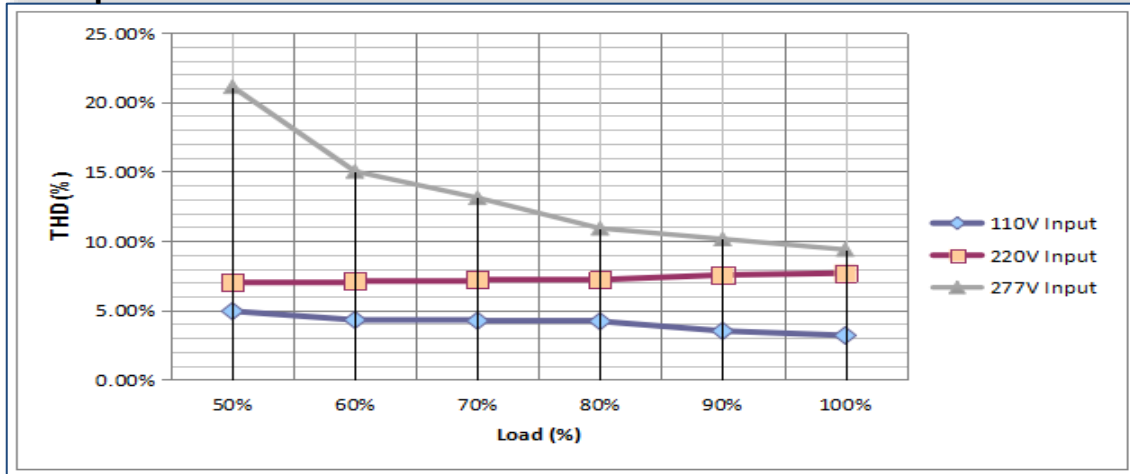

■ **Efficiency vs Output**

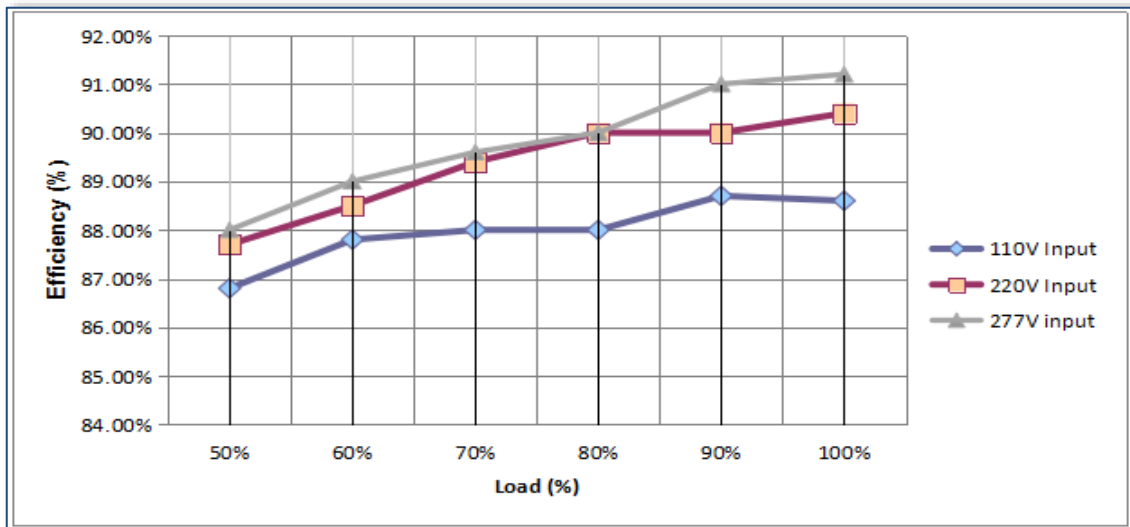

■ **Lifetime vs Case Temp.**

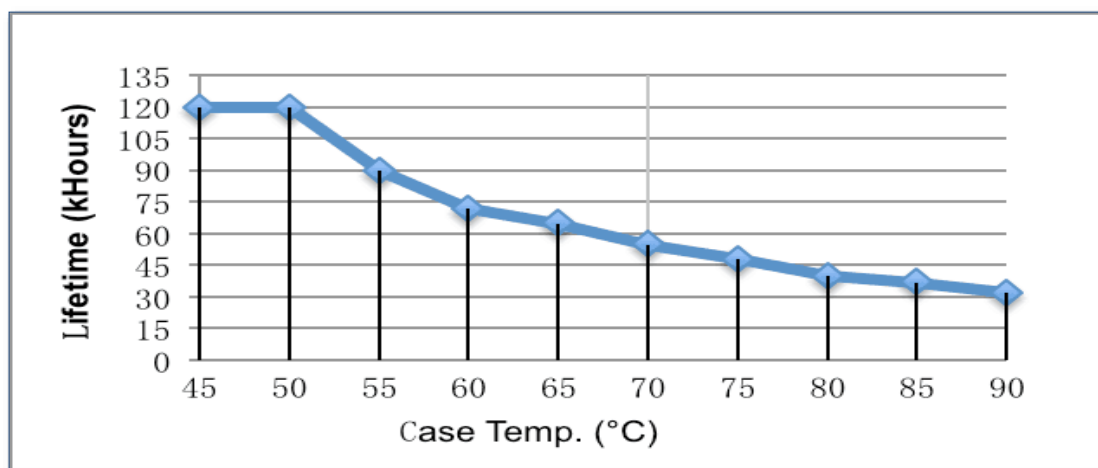

■ Near Field Communication Controller





NOTE:

1. The Near Field Communication controller can program the output current, voltage and timer delays.
2. The Near Field Communication programming is a non-contact process, therefore much safer compared to traditional programming methods.
3. Power devices can be programmed without AC power applied to the driver.

■ Dimming

0-10V Analog Dimming & PWM Dimming

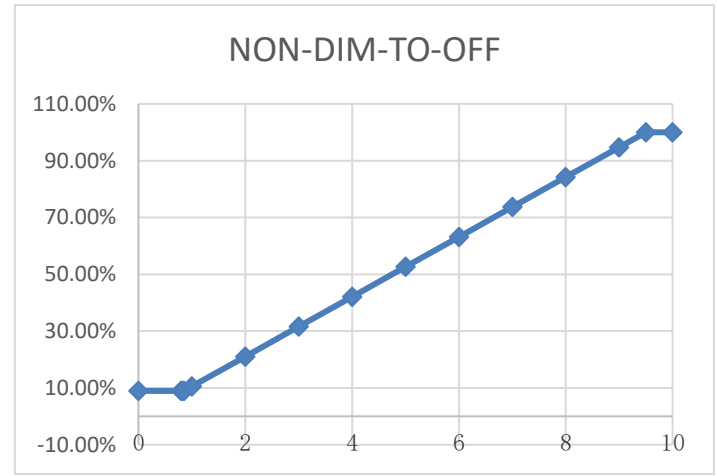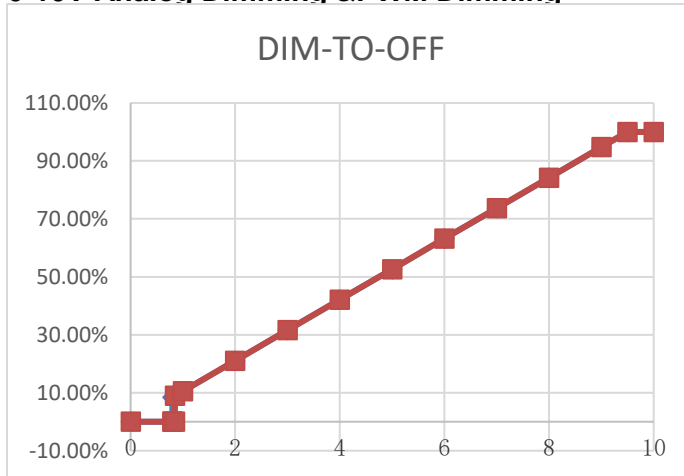

GND	Grey
Dimming wire 0-10V&PWM	Purple
12V AUX	Yellow
Input Dimming Voltage	0-10V
DIM+ Source Current	0-1mA
12V AUX Source Current	200mA
PWM Frequency Range	0.5-3KHZ
PWM high level	10V

NOTE:


1. I_o is actual output current and I_r is rated current without dimming control.
2. For the driver to operate properly, the load voltage must be in the working voltage range.
3. We have DIM-TO-OFF option, which can be programmed by the programmer.
4. Maximum input voltage for the dimming wire is 12V.
5. AUX wire is only for source, can't connect to other voltage source.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

July 12, 2019


PWM Dimming

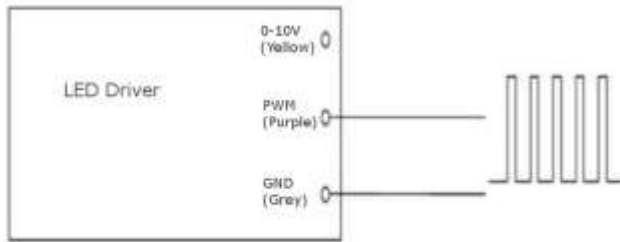


TIMER Dimming

NOTE:

1. The dimming time can be programmed by the programmer.
2. The time of t_1 and t_2 can be set by the programmer.(0.5h step)
3. The value of I_1 and I_2 can be set by the programmer.
4. Changing the current from I_1 to I_2 may take a few min.

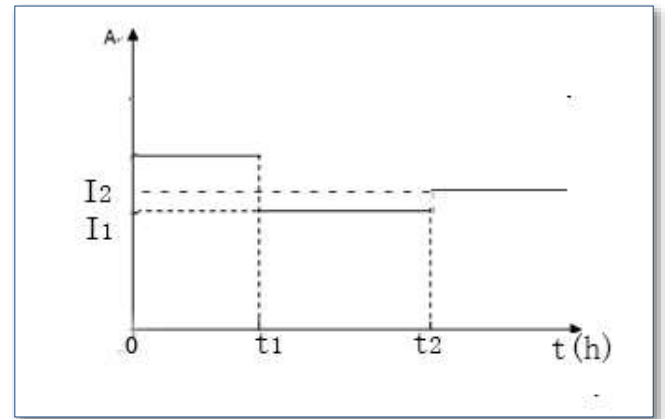

■ Mechanical Design

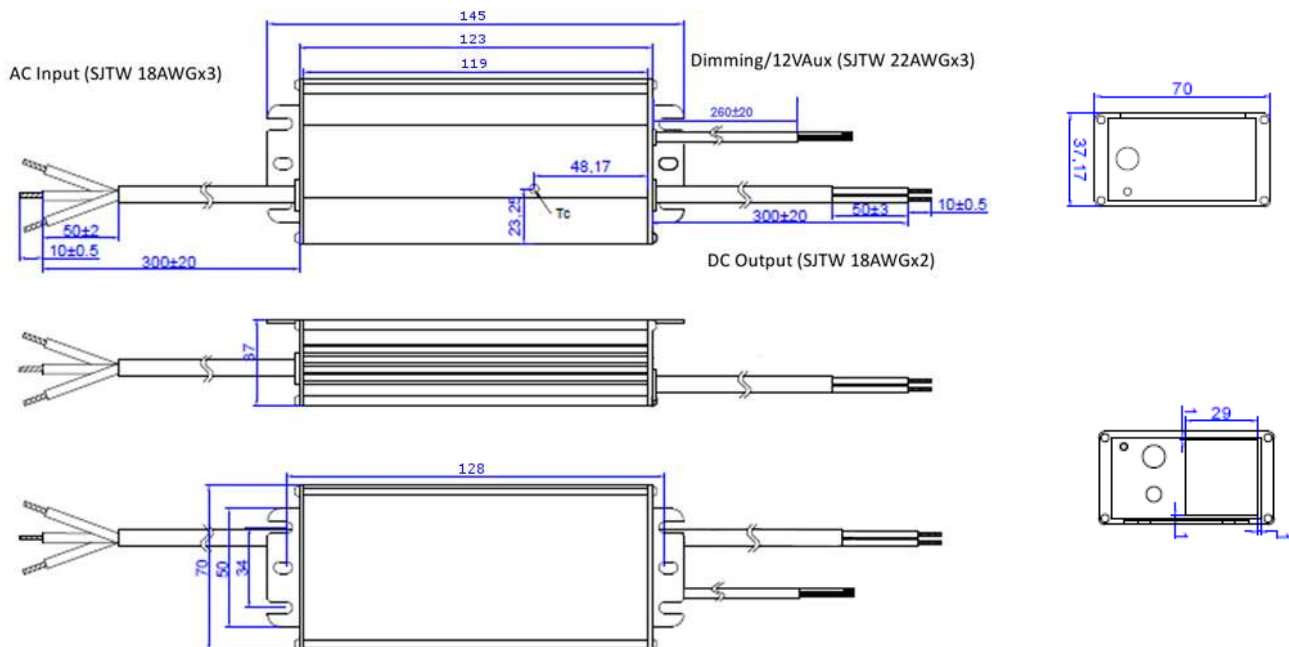


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

July 12, 2019

6 / 8

■ **Mechanical Design J-Box**

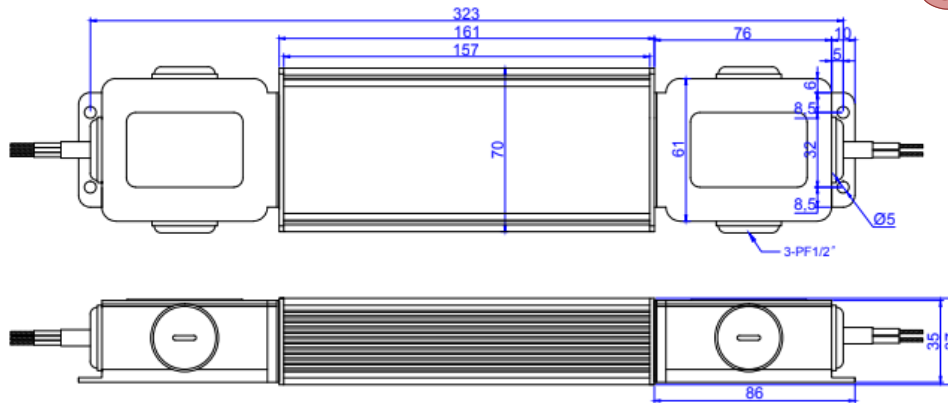

Part Number Scheme

L2 W C P 075 S XXX S T-XYZ

L2=LED Driver Series

W=Input Voltage 100-277Vac

C=Constant Power

P=Programmable

075=Output Power(Watts)


-XYZ=Programming and dimming options. *See ordering options table on page 1.

T=Class I, 3 Wire Input

S=Metal case

XXX=Rated Current
Ex.) 075=750mA
313=3130mA

S=Single Output

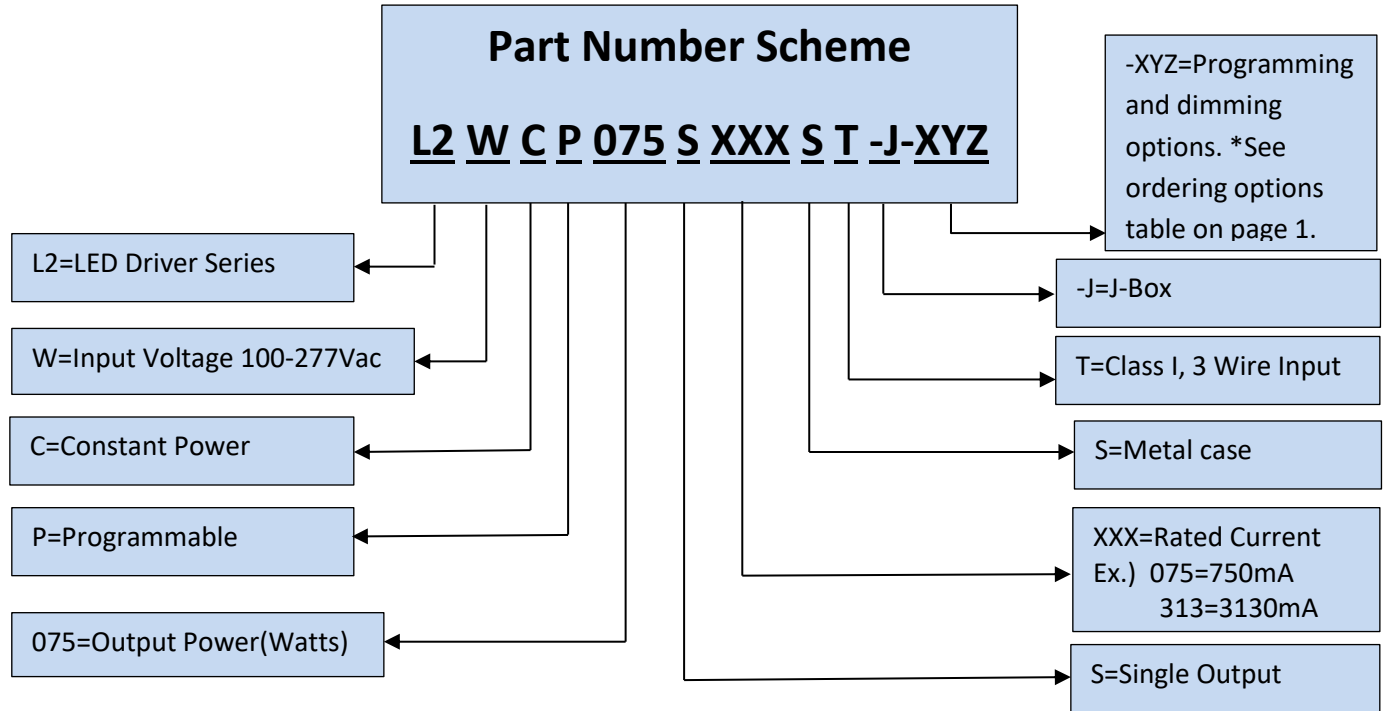

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**