


The **Photovoltaic Detector** series is utilized for applications requiring high sensitivity and moderate response speeds, with an additional sensitivity in the visible-blue region for the blue enhanced series. The spectral response ranges from 350 to 1100 nm, making the regular photovoltaic devices ideal for visible and near IR applications. For additional sensitivity in the 350 nm to 550 nm region, the blue enhanced devices are more suitable.

These detectors have high shunt resistance and low noise, and exhibit long term stability. Unbiased operation of these detectors offers stability under wide temperature variations in DC or low speed applications. For high light levels (greater than 10mW/cm²), the Photoconductive Series detectors should be considered for better linearity.

These detectors are not designed to be reverse biased! Very slight improvement in response time may be obtained with a slight bias. Applying a reverse bias of more than a few volts (>3V) will permanently damage the detectors. If faster response times are required, the Photoconductive Series should be considered.

Refer to the **Photovoltaic Mode (PV)** paragraph in the "Photodiode Characteristics" section of this catalog for detailed information on electronics set up.

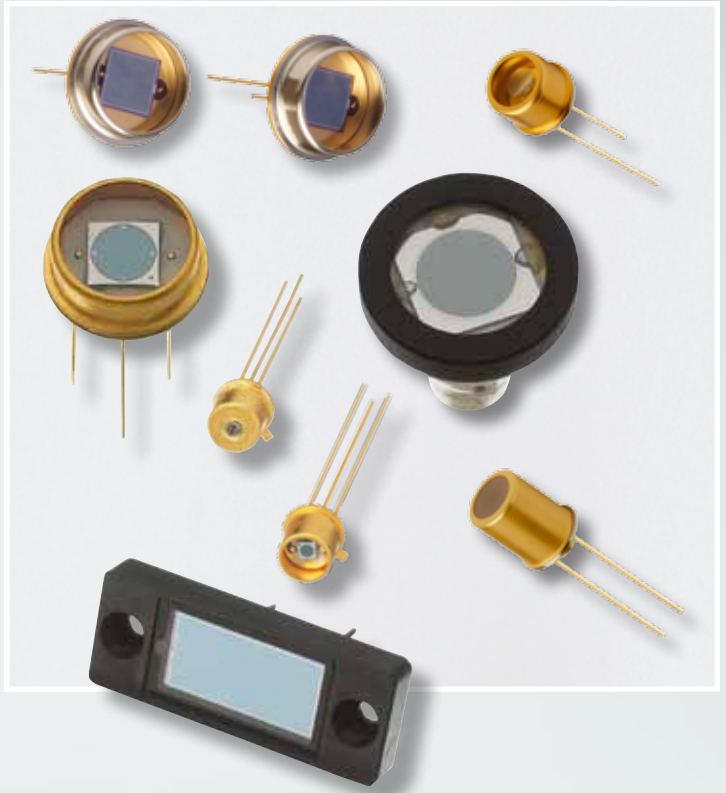


APPLICATIONS

- Colorimeters
- Photometers
- Spectroscopy Equipment
- Fluorescence


FEATURES

- Ultra Low Noise
- High Shunt Resistance
- Wide Dynamic Range
- Blue Enhanced

Typical Shunt Resistance vs. Temperature

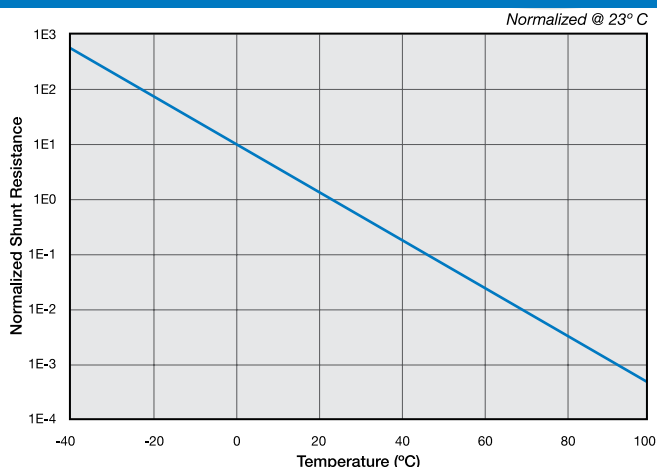

Typical Spectral Response

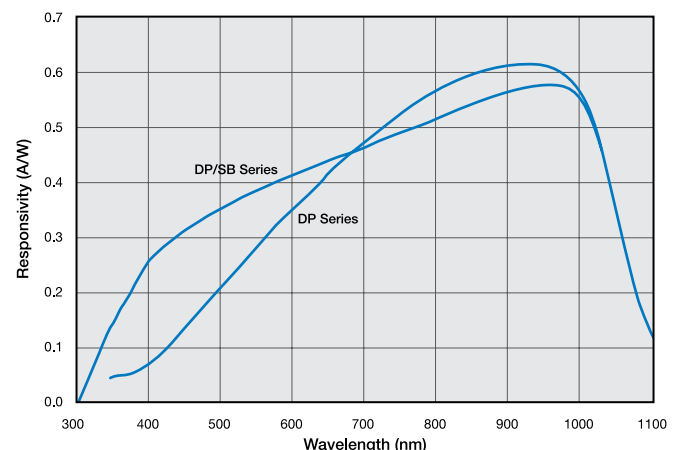

Photovoltaic Series

Typical Electro-Optical Specifications at $T_A=23^{\circ}\text{C}$

Model Number	Active Area		Peak Responsivity Wavelength	Responsivity at λ_p		Capacitance (pF)	Shunt Resistance (G Ω)		NEP (W/ $\sqrt{\text{Hz}}$)	Rise Time (ns)	Temp.* Range (°C)		Package Style ¶
	Area (mm ²)	Dimensions (mm)	λ_p (nm)	(A/W)		0 V	-10 mV		0V 970 nm	0 V 632 nm 50 Ω	Operating	Storage	
			typ.	min.	typ.	max.	min.	typ.	typ.	typ.			

'DP' Series, Metal Package

CD-1705	0.88	0.93 sq	850	970	0.55	0.60	70	1.0	10	2.1 e-15	2000	-40 ~ +100	-55 ~ +125	68 / Plastic
PIN-2DPI ‡	1.1	0.81 x 1.37					150				30			4 / TO-18
PIN-125DPL	1.6	1.27 sq.					160							8 / TO-18
PIN-3CDPI	3.2	1.27 x 2.54					320	0.5	5.0	3.0 e-15	50			4 / TO-18
PIN-3CDP														7 / TO-18
PIN-5DPI	5.1	2.54 ϕ					500	0.4	4.0	3.4 e-15	60			2 / TO-5
PIN-5DP														5 / TO-5
PIN-13DPI	13	3.6 sq					1200	0.35	3.5	3.6 e-15	150			2 / TO-5
PIN-13DP														5 / TO-5
PIN-6DPI	16.4	4.57 ϕ					2000	0.2	2.0	3.9 e-15	220			3 / TO-8
PIN-6DP														6 / TO-8
PIN-44DPI	44	6.6 sq					4300	0.1	1.0	4.8 e-15	475			3 / TO-8
PIN-44DP														6 / TO-8
PIN-10DPI	100	11.28 ϕ					9800	0.05	0.2	6.8 e-15	1000	-10 ~ +60	-20 ~ +70	10/ Lo-Prof
PIN-10DP														11 / BNC
PIN-25DP	613	27.9 ϕ					60000	0.002	0.1	3.0 e-14	6600			12 / BNC

'DP' Series, Plastic Package §

PIN-220DP	200	10 x 20	970	0.55	0.60	20000	0.02	0.2	1.2 e-14	2200	-10 ~ +60	-20 ~ +70	27 / Plastic
-----------	-----	---------	-----	------	------	-------	------	-----	----------	------	-----------	-----------	--------------

Super Blue Enhanced 'DP/SB' Series, (All Specifications @ $\lambda = 410 \text{ nm}$. $V_{\text{BIAS}} = 0\text{V}$, $R_L = 50\Omega$)

Model No.	Active Area/Dimensions		Responsivity (A/W)		Capacitance (pF)	R _{sh} (MΩ)	NEP (W/√Hz)	Operating Current (mA)	Rise Time (μs)			Package Style ¶
	mm²	mm	min.	typ.	typ.	min.	typ.	max.	typ.			
PIN-040DP/SB	0.81	1.02 ϕ	0.15	0.20	60	600	2.0 e-14	0.5	0.02	-10 ~ +60	-20 ~ +70	1 / TO-18
PIN-5DP/SB †	5.1	2.54 ϕ			450	150	5.2 e-14	2.0	0.2			5 / TO-5
PIN-10DP/SB	100	11.28 ϕ			8800	10	2.0 e-13	10.0	2.0			11 / BNC
PIN-10DPI/SB												10 / Metal
PIN-220DP/SB	200	10 x 20			17000	5	2.9 e-13	10.0	4.0			27 / Plastic

'5T' Series, Blue

Model No.	Active Area/Dimensions		Responsivity (A/W) 436nm		Capacitance (pF) 0V	R_{sh} ($M\Omega$)	NEP ($\text{W}/\sqrt{\text{Hz}}$)	Dark Current (nA)	Rise Time (μs)			Package Style ¶
	mm^2	mm	min.	typ.	max	min.	typ.	max.	typ.			
OSD1-5T	1.0	1.0 sq	0.18	0.21	35	250	2.5 e-14	1.0	7	-25 ~ +75	-45 ~ +100	7 / TO-18
OSD3-5T	3.0	2.5 x 1.2			80	100	3.0 e-14	2.0	9			7 / TO-18
OSD5-5T	5.0	2.5 ϕ			130	100	3.3 e-14	2.0	9			5 / TO-5
OSD15-5T	15.0	3.8 sq			390	50	5.6 e-14	10.0	12			5 / TO-5
OSD60-5T	62.0	7.9 sq			1800	3	2.1 e-13	25.0	30			69 / TO-8
OSD100-5TA	100.0	11.3 ϕ			2500	2	2.5 e-13	30.0	45			55 / Special

‡ The "I" suffix on the model number is indicative of the photodiode chip being isolated from the package by an additional pin connected to the case.

For mechanical drawings please refer to pages 61 thru 73.

† Operating Temperature: -40 to +100 $^{\circ}\text{C}$, Storage Temperature: -55 to +125 $^{\circ}\text{C}$.

* Non-Condensing temperature and Storage Range, Non-Condensing Environment.

AVOID DIRECT LIGHT

Since the spectral response of silicon photodiode includes the visible light region, care must be taken to avoid photodiode exposure to high ambient light levels, particularly from tungsten sources or sunlight. During shipment from OSI Optoelectronics, your photodiodes are packaged in opaque, padded containers to avoid ambient light exposure and damage due to shock from dropping or jarring.

AVOID SHARP PHYSICAL SHOCK

Photodiodes can be rendered inoperable if dropped or sharply jarred. The wire bonds are delicate and can become separated from the photodiode's bonding pads when the detector is dropped or otherwise receives a sharp physical blow.

CLEAN WINDOWS WITH OPTICAL GRADE CLOTH / TISSUE

Most windows on OSI Optoelectronics photodiodes are either silicon or quartz. They should be cleaned with isopropyl alcohol and a soft (optical grade) pad.

OBSERVE STORAGE TEMPERATURES AND HUMIDITY LEVELS

Photodiode exposure to extreme high or low storage temperatures can affect the subsequent performance of a silicon photodiode. Storage temperature guidelines are presented in the photodiode performance specifications of this catalog. Please maintain a non-condensing environment for optimum performance and lifetime.

OBSERVE ELECTROSTATIC DISCHARGE (ESD) PRECAUTIONS

OSI Optoelectronics photodiodes, especially with IC devices (e.g. Photops) are considered ESD sensitive. The photodiodes are shipped in ESD protective packaging. When unpacking and using these products, anti-ESD precautions should be observed.

DO NOT EXPOSE PHOTODIODES TO HARSH CHEMICALS

Photodiode packages and/or operation may be impaired if exposed to CHLOROTHENE, THINNER, ACETONE, or TRICHLOROETHYLENE.

INSTALL WITH CARE

Most photodiodes in this catalog are provided with wire or pin leads for installation in circuit boards or sockets. Observe the soldering temperatures and conditions specified below:

Soldering Iron:	Soldering 30 W or less Temperature at tip of iron 300°C or lower.	
Dip Soldering:	Bath Temperature:	260±5°C.
	Immersion Time:	within 5 Sec.
	Soldering Time:	within 3 Sec.
Vapor Phase Soldering:	DO NOT USE	
Reflow Soldering:	DO NOT USE	

Photodiodes in plastic packages should be given special care. Clear plastic packages are more sensitive to environmental stress than those of black plastic. Storing devices in high humidity can present problems when soldering. Since the rapid heating during soldering stresses the wire bonds and can cause wire to bonding pad separation, it is recommended that devices in plastic packages to be baked for 24 hours at 85°C.

The leads on the photodiode **SHOULD NOT BE FORMED**. If your application requires lead spacing modification, please contact OSI Optoelectronics Applications group at (310)978-0516 before forming a product's leads. Product warranties could be voided.



*Most of our standard catalog products are RoHS Compliant. Please contact us for details

Mechanical Drawings

Mechanical Specifications and Die Topography

1. Parameter Definitions:

A = Distance from top of chip to top of glass.

a = Photodiode Anode.

B = Distance from top of glass to bottom of case.

c = Photodiode Cathode

(Note: cathode is common to case in metal package products unless otherwise noted).

W = Window Diameter.

F.O.V. = Field of View (see definition below).

2. Dimensions are in inches (1 inch = 25.4 mm).

3. Pin diameters are 0.018 ± 0.002 " unless otherwise specified.

4. Tolerances (unless otherwise noted)

General: $0.XX \pm 0.01$ "

$0.XXX \pm 0.005$ "

Chip Centering: ± 0.010 "

Dimension 'A': ± 0.015 "


5. Windows

All '**UV**' Enhanced products are provided with QUARTZ glass windows, 0.027 ± 0.002 " thick.

All '**XUV**' products are provided with removable windows.

All '**DLS**' PSD products are provided with A/R coated glass windows.

All '**FIL**' photoconductive and photovoltaic products are epoxy filled instead of glass windows.

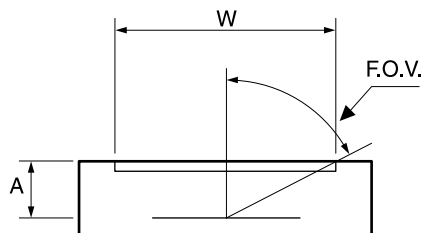

$$F.O.V. = \tan^{-1} \left(\frac{W}{2A} \right)$$

OSI Optoelectronics
An OSI Systems Company



For Further Assistance
Please Call One of Our Experienced
Sales and Applications Engineers

310-978-0516



- Or -
visit our website at
www.osioptoelectronics.com

Mechanical Specifications



All units in inches. Pinouts are bottom view.

1 TO-18		2 TO-5		3 TO-8																																	
Pin Circle Dia.=0.100 <table><tr><th>P/N</th><th>A</th><th>B</th><th>W</th></tr><tr><td>PIN-020A</td><td>0.075</td><td>0.200</td><td>0.155</td></tr><tr><td>PIN-040A</td><td>0.075</td><td>0.200</td><td>0.155</td></tr></table>		P/N	A	B	W	PIN-020A	0.075	0.200	0.155	PIN-040A	0.075	0.200	0.155	Pin Circle Dia.=0.200 <table><tr><th>P/N</th><th>A</th><th>B</th><th>W</th></tr><tr><td>All Others</td><td>0.094</td><td>0.180</td><td>0.240</td></tr><tr><td>CD-25T</td><td>0.050</td><td>0.130</td><td>0.23</td></tr></table>		P/N	A	B	W	All Others	0.094	0.180	0.240	CD-25T	0.050	0.130	0.23	Pin Circle Dia.=0.295 <table><tr><th>P/N</th><th>A</th></tr><tr><td>PIN-6DI/6DPI</td><td>0.115</td></tr><tr><td>APD50-8-150-T08</td><td>0.125</td></tr><tr><td>PIN-44DI/44DPI</td><td>0.125</td></tr></table>		P/N	A	PIN-6DI/6DPI	0.115	APD50-8-150-T08	0.125	PIN-44DI/44DPI	0.125
P/N	A	B	W																																		
PIN-020A	0.075	0.200	0.155																																		
PIN-040A	0.075	0.200	0.155																																		
P/N	A	B	W																																		
All Others	0.094	0.180	0.240																																		
CD-25T	0.050	0.130	0.23																																		
P/N	A																																				
PIN-6DI/6DPI	0.115																																				
APD50-8-150-T08	0.125																																				
PIN-44DI/44DPI	0.125																																				
4 TO-18		5 TO-5		6 TO-8																																	
Pin Circle Dia.=0.100 <table><tr><th>A</th><th>B</th></tr><tr><td>0.090</td><td>0.150</td></tr></table>		A	B	0.090	0.150	Pin Circle Dia.=0.200 <table><tr><th>P/N</th><th>A</th><th>B</th></tr><tr><td>OSD-Prefix Devices</td><td>0.050</td><td>0.130</td></tr><tr><td>UV-XXXDQ</td><td>0.065</td><td>0.138</td></tr><tr><td>UV-XXEQ</td><td>0.055</td><td>0.138</td></tr><tr><td>All Others</td><td>0.102</td><td>0.180</td></tr></table> Quartz Window: OSD5.8-7Q UV Transmissive Window: OSD5.8-7U		P/N	A	B	OSD-Prefix Devices	0.050	0.130	UV-XXXDQ	0.065	0.138	UV-XXEQ	0.055	0.138	All Others	0.102	0.180	Pin Circle Dia.=0.295 <table><tr><th>P/N</th><th>A</th><th>B</th></tr><tr><td>UV-035DQ</td><td>0.130</td><td>0.195</td></tr><tr><td>UV-035EQ</td><td>0.120</td><td>0.195</td></tr><tr><td>All Others</td><td>0.140</td><td>0.205</td></tr></table>		P/N	A	B	UV-035DQ	0.130	0.195	UV-035EQ	0.120	0.195	All Others	0.140	0.205	
A	B																																				
0.090	0.150																																				
P/N	A	B																																			
OSD-Prefix Devices	0.050	0.130																																			
UV-XXXDQ	0.065	0.138																																			
UV-XXEQ	0.055	0.138																																			
All Others	0.102	0.180																																			
P/N	A	B																																			
UV-035DQ	0.130	0.195																																			
UV-035EQ	0.120	0.195																																			
All Others	0.140	0.205																																			
7 TO-18		8 TO-18		9 TO-18																																	
Pin Circle Dia.=0.100 <table><tr><th>P/N</th><th>A</th><th>B</th></tr><tr><td>PIN-3CD / 3CDP</td><td>0.087</td><td>0.146</td></tr><tr><td>BPX-65</td><td>0.075</td><td>0.200</td></tr><tr><td>OSD-Prefix Devices</td><td>0.080</td><td>0.200</td></tr></table> Quartz Window: OSD1.2-7Q UV Transmissive Window: OSD1.2-7U		P/N	A	B	PIN-3CD / 3CDP	0.087	0.146	BPX-65	0.075	0.200	OSD-Prefix Devices	0.080	0.200	Pin Circle Dia.=0.100		Pin Circle Dia.=0.100																					
P/N	A	B																																			
PIN-3CD / 3CDP	0.087	0.146																																			
BPX-65	0.075	0.200																																			
OSD-Prefix Devices	0.080	0.200																																			


Mechanical Specifications

All units in inches. Pinouts are bottom view.

10 Low Profile




Pin Circle Dia.=0.73



Products:

PIN-10DI
PIN-10DPI
PIN-10DPI/SB
UV-50L
UV-100L

11 BNC




Outer Contact — Anode	PIN-10D, PIN-10DP, PIN-10DP/SB UV-100DQ, UV-100EQ
Outer Contact — Cathode	UV-50, UV-100

Products:

PIN-10D
PIN-10DP
PIN-10DP/SB
UV-50
UV-100
UV-100DQ
UV-100EQ

12 BNC




Outer Contact — Anode

Products:

PIN-25D
PIN-25DP

13 Special BNC


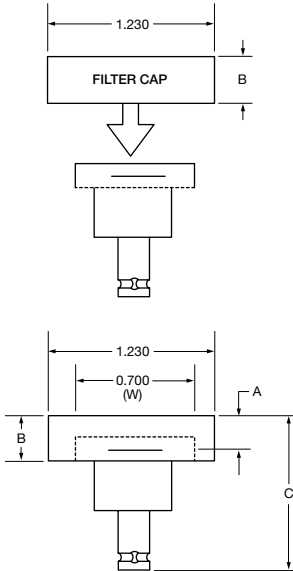


Dimensions			
P/N	A	B	C
PIN-10DF	0.217	0.330	1.020
PIN-10AP	0.386	0.550	1.415

Products:

PIN-10AP
PIN-10DF

14 TO-5




Pin Circle Dia.= 0.200
Bottom View

Products:

DLS-2S

15 Special Plastic

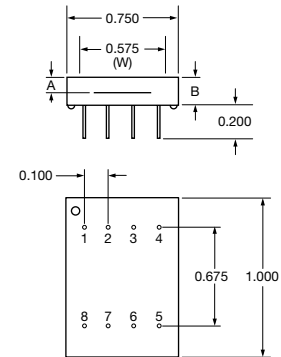

Dimensions

P/N	A	B
FIL-UV50	0.090	0.155

Pinouts

P/N	1	2	3	4	5	6	7	8
FIL-UV50	c	-	-	a	c	-	-	a


Mechanical Specifications

All units in inches. Pinouts are bottom view.

22 TO-5

Products:



XUV-005



23 TO-8

Products:



XUV-020
XUV-035



24 TO-8


Products:

PIN-DSIn-TEC



Pinout	
1	TEC (-)
2	Thermistor
3	Thermistor
4	TEC (+)
5	Top Silicon, Cathode
6	Top Silicon, Anode
7	Bottom InGaAs, Anode
8	Bottom InGaAs, Cathode

25 Special Ceramic / Plastic






P/N	Dimensions			
	A	B	C	D
UV-005EQC	0.300	0.236	0.024	0.177
UV-035EQC	0.400	0.350	0.028	0.290
UV-100EQC	0.650	0.590	0.028	0.490
UV-005DQC	0.300	0.236	0.035	0.177
UV-035DQC	0.400	0.350	0.039	0.290
UV-100DQC	0.650	0.590	0.039	0.490
XUV-50C	0.650	0.590	0.027	0.490
XUV-100C	0.650	0.590	0.027	0.490
RD-100	0.650	0.590	0.027	0.490
RD-100A	0.650	0.590	0.027	0.490
UV-35P	0.390	0.345	0.050	0.275
OSD35-LR-A	0.390	0.350	---	0.290
OSD35-LR-D	0.390	0.350	---	0.290

Note: OSD35-prefix packages come with 0.31" (min.) leads



26 TO-8

Products:

RD-100
RD-100A
UV-35P
UV-005EQC
UV-035EQC
UV-100EQC
UV-005DQC
UV-035DQC
UV-100DQC
XUV-50C
XUV-100C
OSD35-LR-A
OSD35-LR-D



27 Special Plastic

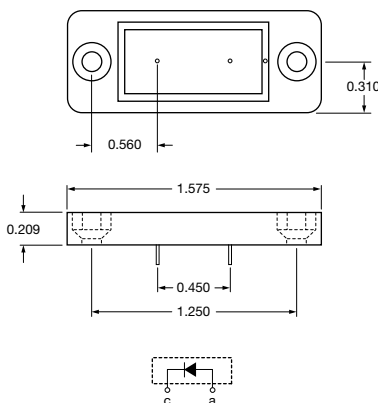


28 BNC

Products:

PIN-220D
PIN-220DP
PIN-220DP/SB

Products:

XUV-100



BNC Connector
Outer Contact = Cathode


Mechanical Specifications

All units in inches. Pinouts are bottom view.

51 Low Cost Ceramic

Products:


SL-30

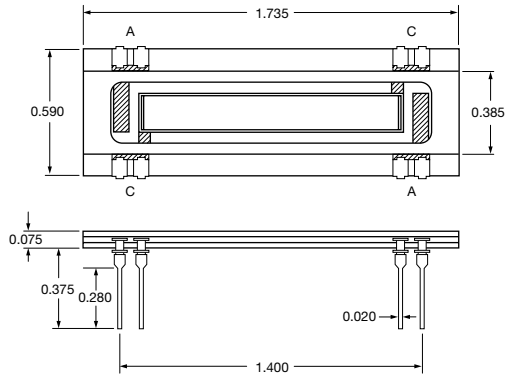

52 Special

Products:

A2V-76

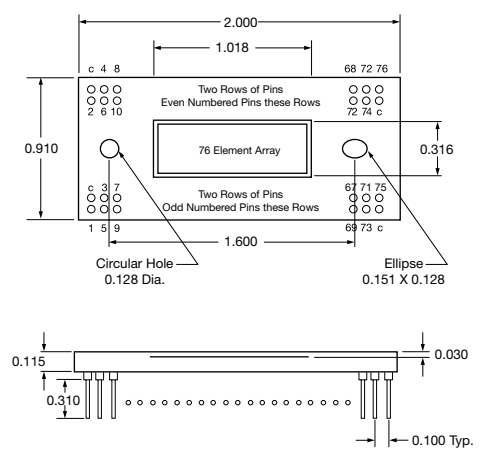


Pin Diameter = 0.025

53 Special

Products:

A2V-16

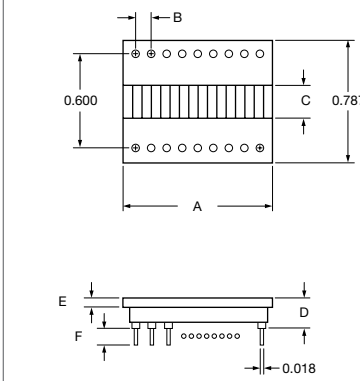



Dimensions						
P/N	A	B	C	D	E	F
A2V-16	1	0.1	0.212	0.2	0.062	0.06

54 40-PIN-DIP

Products:

A5V-35UV
A5C-35, A5C-38
A5V-35, A5V-38

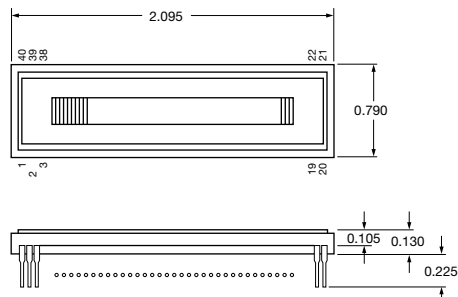

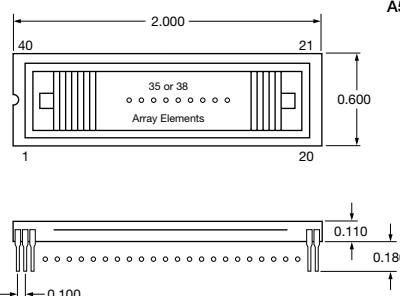


35 Element Array			
Pin Number	Element Number	Pin Number	Element Number
1	C	21	C
2	2	22	35
3	4	23	33
4	6	24	31
5	8	25	29
6	10	26	27
7	12	27	25
8	14	28	23
9	16	29	21
10	18	30	19
11	--	31	17
12	20	32	15
13	22	33	13
14	24	34	11
15	26	35	9
16	28	36	7
17	30	37	5
18	32	38	3
19	34	39	1
20	C	40	C

38 Element Array			
Pin Number	Element Number	Pin Number	Element Number
1	C	21	C
2	2	22	37
3	4	23	35
4	6	24	33
5	8	25	31
6	10	26	29
7	12	27	27
8	14	28	25
9	16	29	23
10	18	30	21
11	20	31	19
12	22	32	17
13	24	33	15
14	26	34	13
15	28	35	11
16	30	36	9
17	32	37	7
18	34	38	5
19	36	39	3
20	38	40	1

55 Special

Products:

OSD100-0A
OSD100-5TA

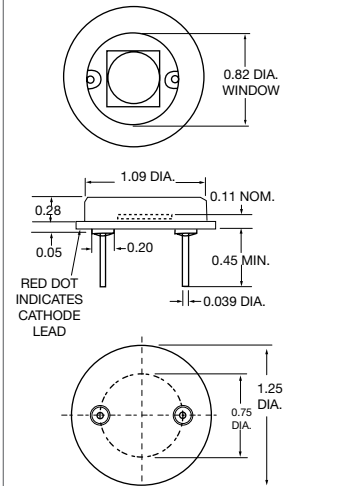


Mechanical Specifications

All units in inches. Pinouts are bottom view.


65 TO-52

Products:

APD02-8-150-T52
APD05-8-150-T52
APD10-8-150-T52




Pin Circle Dia.=0.100




66 TO-52L

Products:

APD02-8-150-T52L
APD05-8-150-T52L
APD10-8-150-T52L




Pin Circle Dia.=0.100




67 TO-5

Products:

APD15-8-150-TO5
APD30-8-150-TO5




Pin Circle Dia.=0.200



68 Plastic

Products:

CD-1705

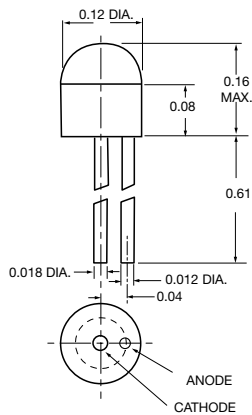


ANODE
CATHODE

69 TO-8

Products:

OSD60-0
OSD60-5T
OSD60-E

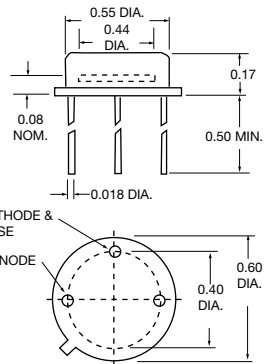


CATHODE &
CASE
ANODE

70 TO-8

Products:

QD50-0

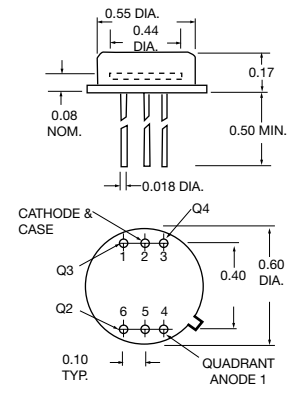

CATHODE &
CASE
ANODE
Q4
Q3
Q2
Q1
QUADRANT
ANODE 1