

■ Features

- Power Rating: 150W
- Input Voltage: 90-305Vac
- Constant voltage and constant current design
- Output current (63mA-2600mA)
- Digital programming with external module and software
- Efficiency up to 94.5%
- Compatible with 0(0.05)-10V, PWM, external resistor, clock, DMX dimming
- Lightning, OVP, SCP, OTP & Open Circuit Protection
- IP67
- 10-year warranty
- Surge Protection: L-N 5.5kV, L/N-Earth 11kVPower



*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Ultra-Hostile-Environmental LED Lighting
- LED lights with flexible current settings
- Street lights, high bay and low bay lights, LED panels

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
L4WCP150S260ST	90~305Vac	150W	29-58V	260mA	2600mA	92.5%	UL/cUL
L4WCP150S189ST	90~305Vac	150W	47-95V	189mA	1890mA	93.5%	UL/cUL
L4WCP150S126ST	90~305Vac	150W	71-142V	126mA	1260mA	94%	UL/cUL
L4WCP150S095ST	90~305Vac	150W	95-190V	95mA	950mA	94%	UL/cUL
L4WCP150S063ST	90~305Vac	150W	142-285V	63mA	630mA	94.5%	UL/cUL

■ Technical Data

Input voltage range	90-305Vac
Frequency	47-63Hz
Power factor	> 0.95 @115Vac & 80~100% full load, > 0.90 @277Vac & 80~100% full load
Output voltage	29-285V
Output power	150W
Dimming	0(0.05)~10V, PWM, External Resistor, DMX
Max. Current Ripple	300mA, 200mA, 150mA 100mA, 80mA

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

■ **Technical Data(cont.)**


Max. Voltage ripple	±0.5%
Max input current	2A
Max input Power	173W
Efficiency	92.5-94.5%
Output AUX Power Voltage (optional)	12V
Output AUX Power Current (optional)	0-100mA
Max. open circuit voltage	65V, 105V, 155V, 205V, 295V
THD	< 20% @120- 277Vac & 80~100% full load
Protection	OVP, SCP, OTP, and Open Circuit Protection
Environmental Protection	UL Dry &Damp and wet
Working Temperature	-40~+80°C
Max Case Temperature	90°C
Surge Protection	L-N 5.5kV, L/N-Earth 11kV
ANSI Surge Type	1.2/50µs Combination Wave (w/t 2Ω)
Isolation (primary to Secondary)	3750Vac/10maMax/60 seconds
Dimension	230x68x42.5 mm (9.03x2.68x1.67 inch)
Mounting Length	244mm (9.61 inch)
Overall Length	254 mm (10.00 inch)
Weight	1.45 kg (3.20 lb)
Lifetime	>100,000 hours @ full load, 75°C Tcase
Packing	1.45 kg; 14 units/carton; 27 cartons/pallet

■ **Safeties**


Safeties	UL8750
Electromagnetic Compliance	Per Title 47 CFR Part 15 Class B, (Class A with 12V AUX output)

■ **Electrical Specifications***(L4WCP150S189ST @25°C)


Output Current vs. Case Temperature (with $\pm 5^{\circ}\text{C}$ Tolerance)

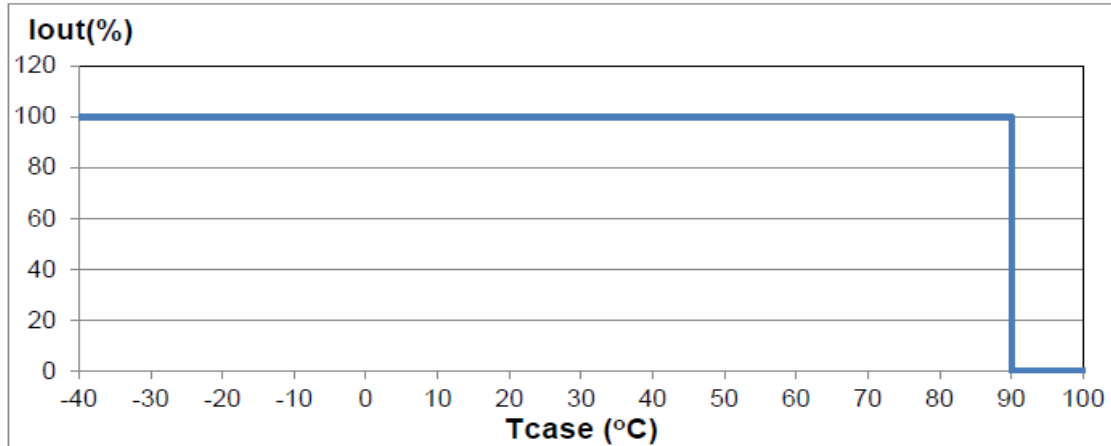

I-V Programming Area: Output Voltage vs. Output Current

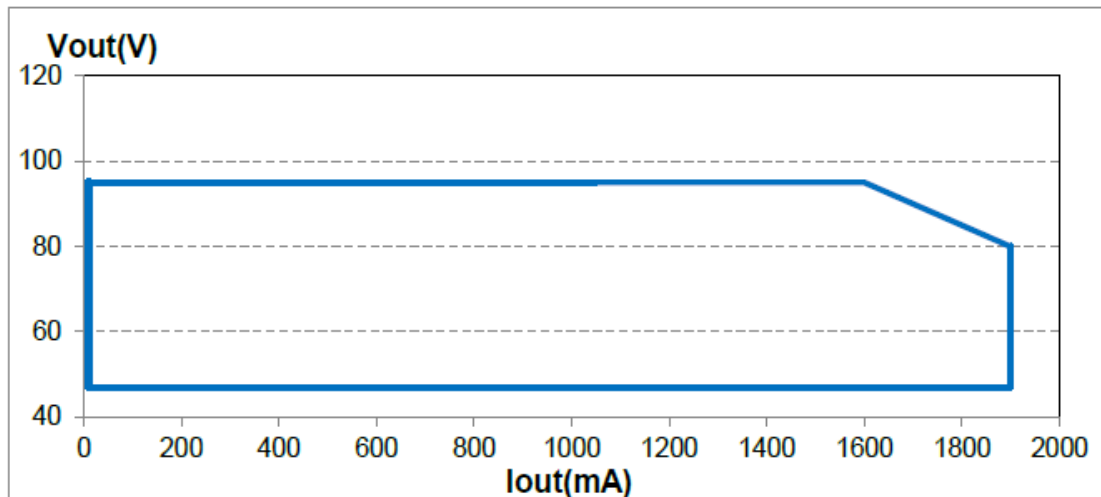


Output Current vs. External Setting Resistor

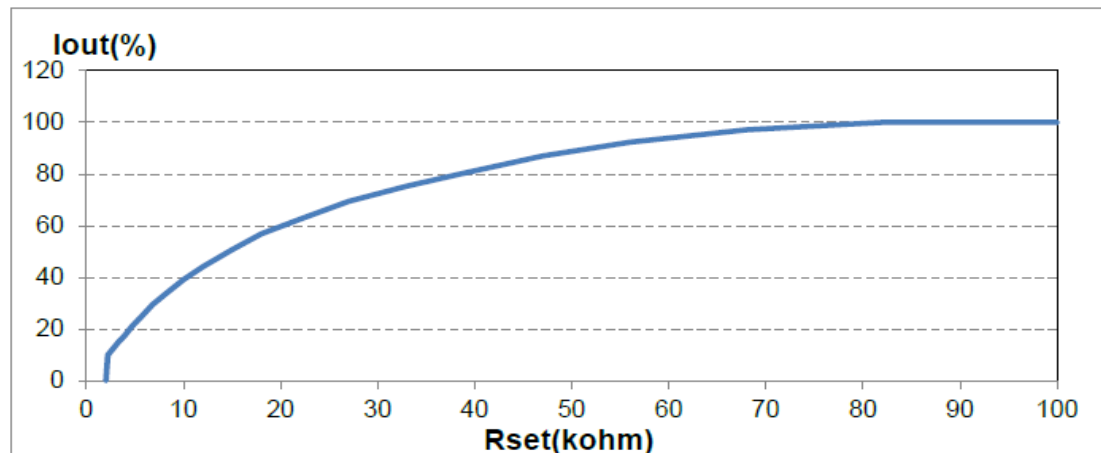


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com


■ **Lifetime vs Case Temperature**

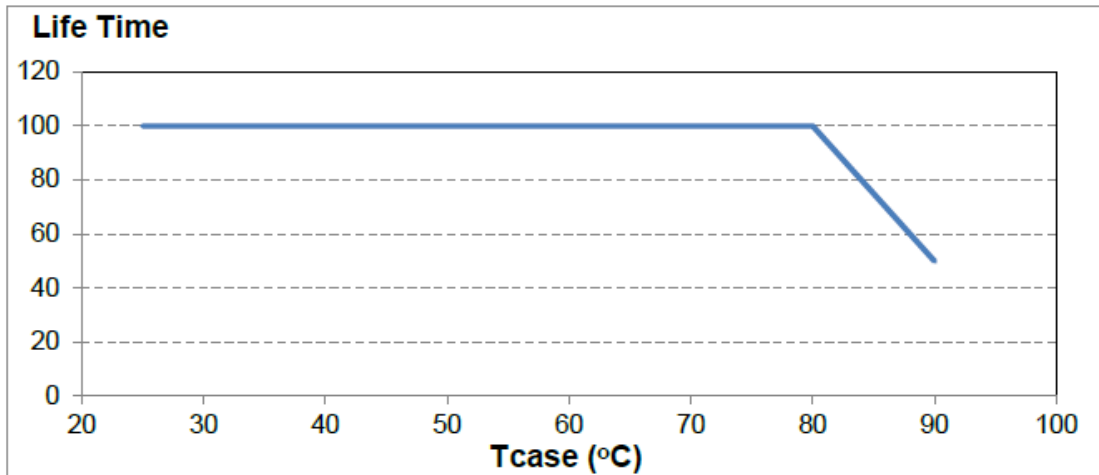


■ **Power Factor vs. Output Power**

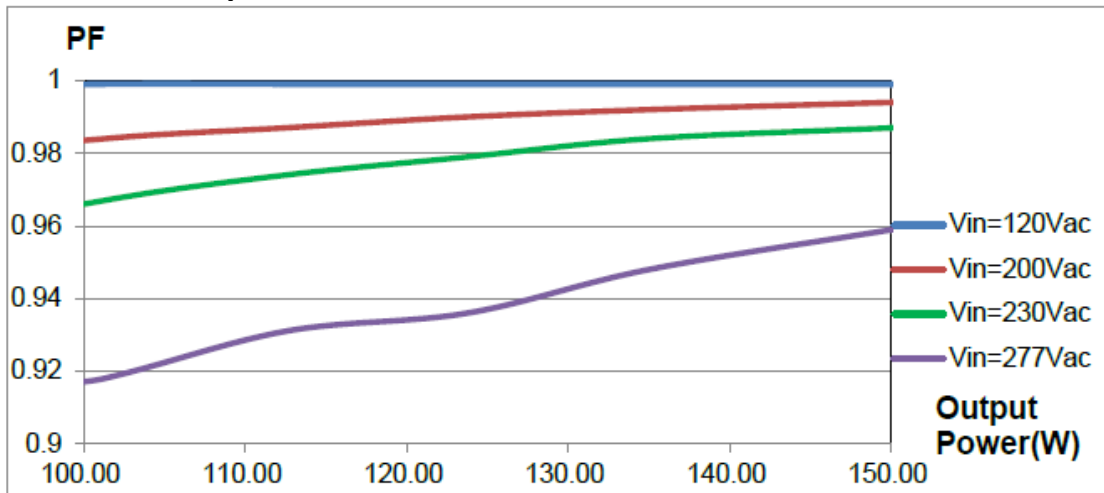


■ **THD vs. Output Power**

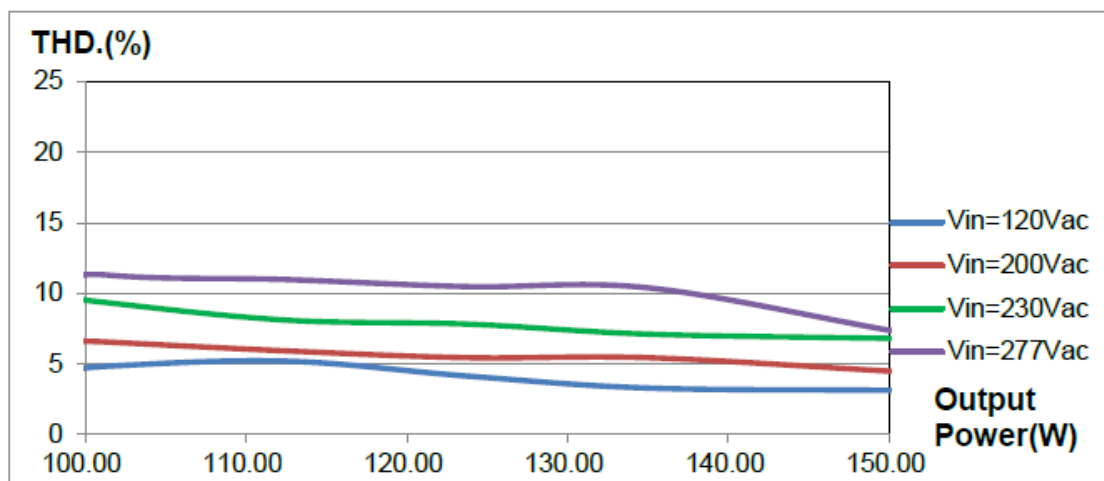


■ **Efficiency vs. Output Power**

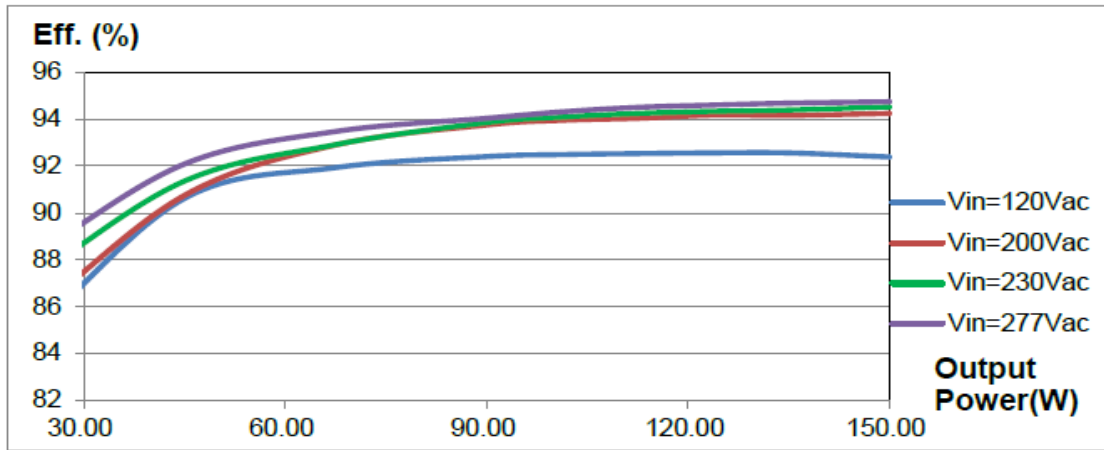

■ **Derating Curve**


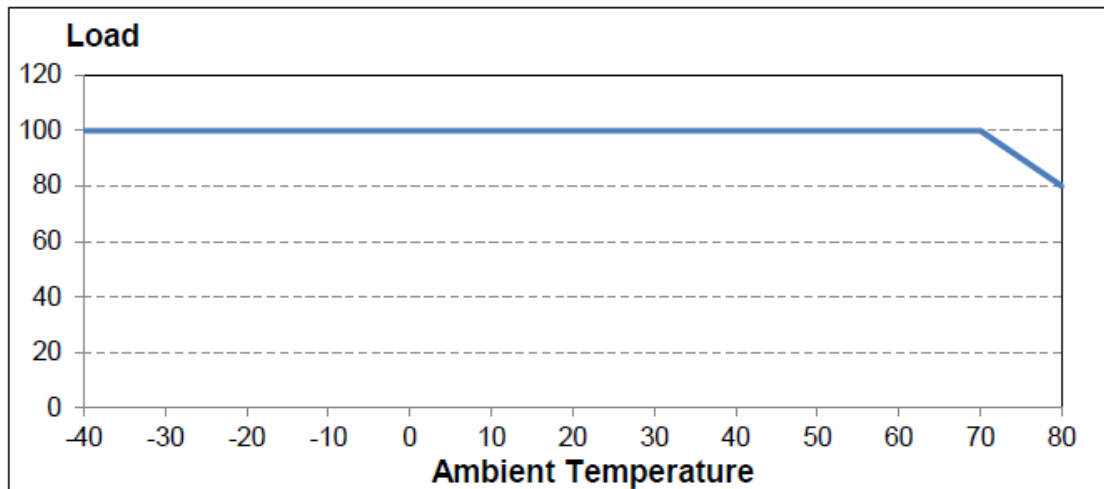


■ **Static Characteristics**


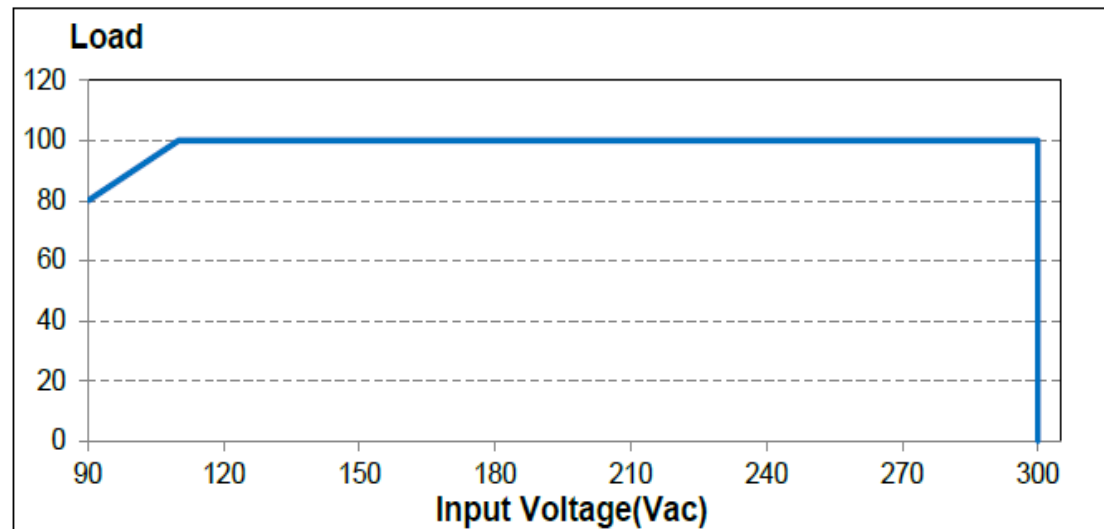


■ **Dimming**

Mode 1 : 1-10Vdc Input on Dimming Control

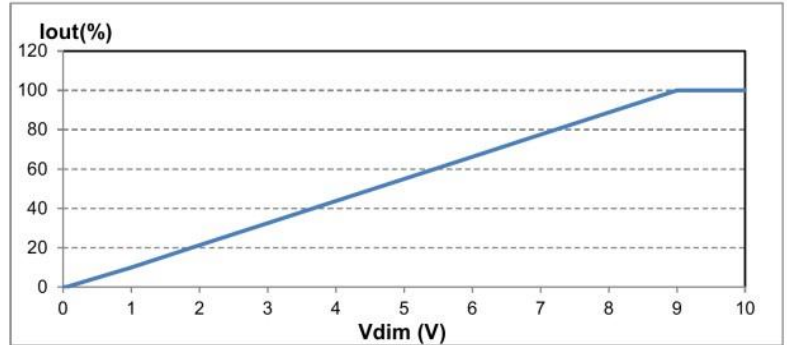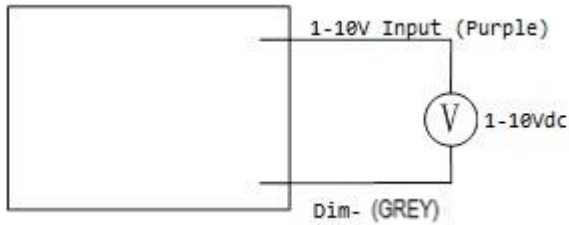


Mode 2 : Potentiometer on Dimming Control

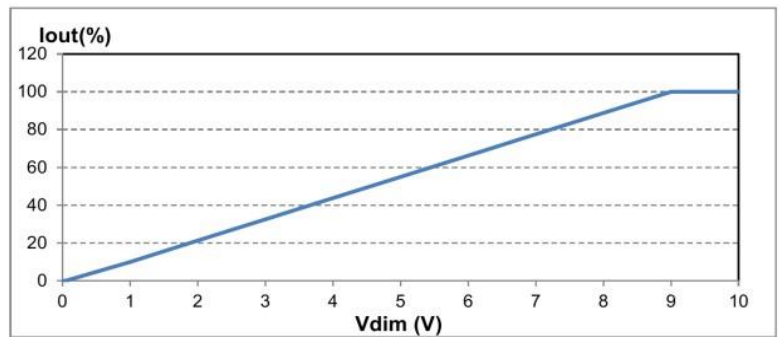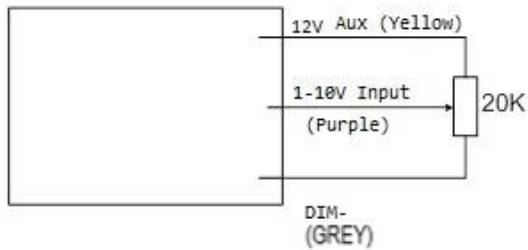

Mode 3 : PWM Signal on Dimming Wires




I_o/I_r vs PWM Duty

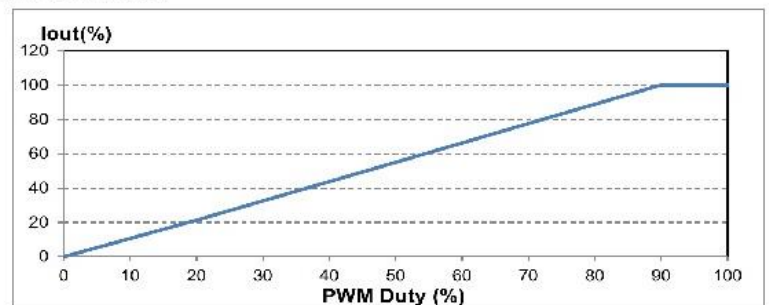

■ **Dimming(cont.)**

Parameter	Values	Conditions
Input Voltage	0~10 V	Purple wire.
Input Current	10 mA	
PWM Frequency	0.5 ~ 3 kHz	
PWM Pulse Width	10%~100%	

Mode 4 : Timer Dimming (Does not require dimming wires)

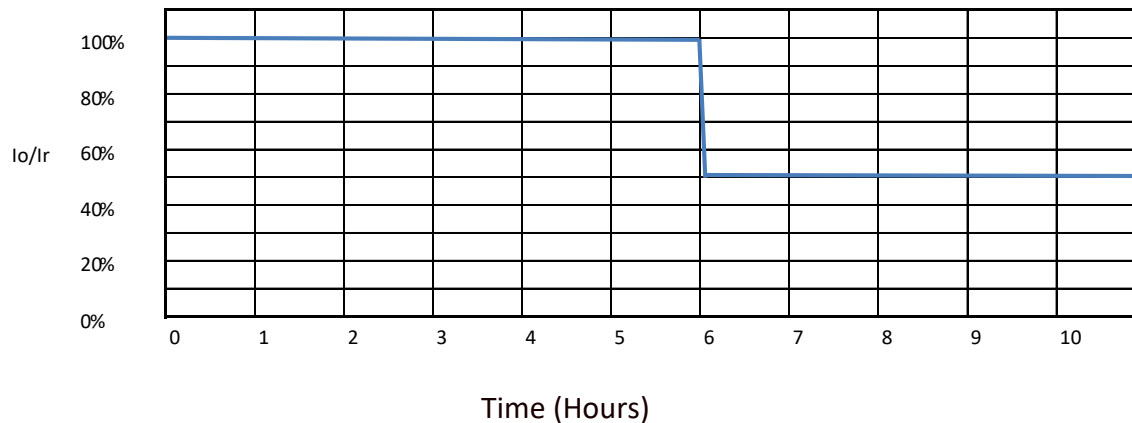


Standard power/time combination above, can be factory set to customer specification. Recycle AC to restart timer.

NOTE:

1. If the dimming function is not used, cap the dimming wires and don't use them.
2. I_o is actual output current and I_r is rated current without dimming control.
3. For the driver to operate properly, the load voltage must be maintained above the minimum voltage threshold, approximately 50% of the max. output voltage for any given mode.
4. The dimming signal can be less than 1V, when it is 0-1V, the output current can maintain about 10% I_r , however, the connected LEDs may flicker. Maintain dimming voltage greater than 1V in the application is strongly recommended.
5. Pulse width less than 10% will cause the driver to work improperly.


■ PC Programming Diagram

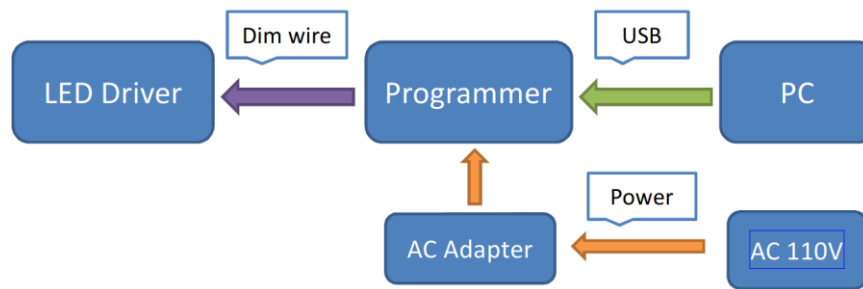

NOTES:

1. To set the desired output current, begin by installing the programming software on your PC and connect the programming module to your PC.
2. Next, connect the LED Driver to the programming module using the Dimming wires.
3. Please note an external power source is needed to provide power to the programming module.
4. Contact Autec Sales for current programming software and complete programming instructions.


■ Mechanical Diagram

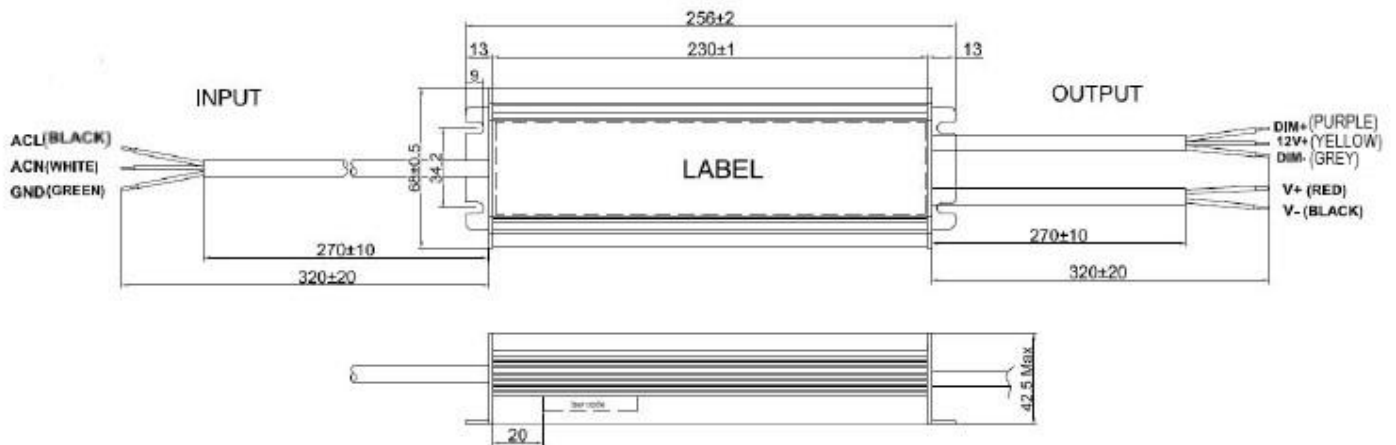

- Notes:
1. Outline Dimension: 256L*68W*42.5H
 2. Input and Output Connector and Pin Assignment
 3. The Yellow Dimming wire is optional for 12V Auxiliary Power

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

Wire Specifications		Colors
Input Wire	3/#18AWG	L= Black, N=White, GND=Green
Output	2/#18AWG	V+ is Red, V- is Black
Dimming Wire	3/#22AWG	Dim + is Purple, Dim Return is Grey, AUX12V+/100mA is Yellow

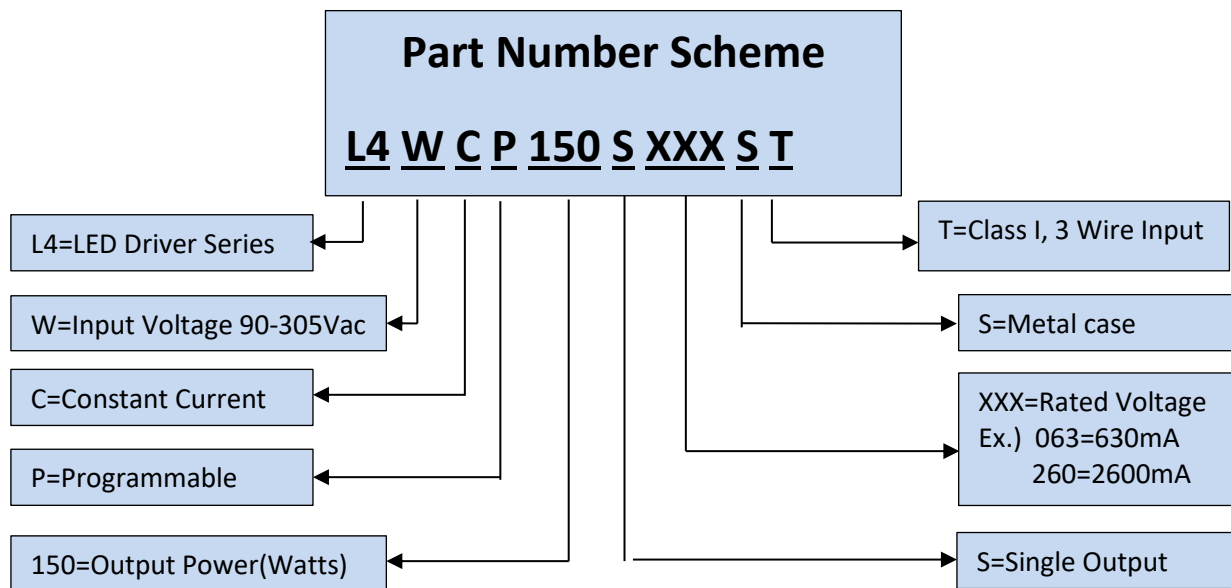

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**