RoHS



30W, 120-277Vac Input, Constant Current LED Driver

■ Features


• Power Rating: 30W

• Input Voltage: 120-277Vac

- Constant current design
- Output current (250-750mA)
- Output current selectable trough DIP Switch
- Efficiency up to 86%
- SCP, OCP
- 3 in 1 Dimming 0-10V/PWM/Timer dimming
- 0-100% dimming range, Dim-to-off
- Optional 12V/50mA Aux
- SELV output design
- IP20
- 5-year warranty

■ Application

• Indoor or Outdoor lights





*Product images are for illustrative purposes only and may vary from actual design.

Model Number	Input	Output Output		Output	Output	Efficiency	
wiodei Number	Voltage Range	Power	Voltage	Current Min.	Current Max.	120/347Vac	Certification
LFWCD032S035ST-Lb	120-277Vac	30W	27-54V	350mA	350mA	85.5%/86%	UL/cUL
LFWCD032S055ST-Lb	120-277Vac	30W	27-54V	550mA	550mA	85.5%/86%	UL/cUL
LFWCD032S075ST-Lb	120-277Vac	30W	27-54V	750mA	750mA	85.5%/86%	UL/cUL
LFWCP032S075ST-Lb*	120-277Vac	30W	27-54V	250mA	750mA	85.5%/86%	UL/cUL

*DIP Switch Model with selectable output current

■ Technical Data

Input Voltage	120-277Vac
Input Frequency	47-63Hz
Input Current	500mA Max.@120-277Vac, 100% load
Inrush current	60Amax. @230Vac, 25°C
Power Factor	PF>0.9@120Vac/230Vac/277Vac, 100% load
THD	<20%@115Vac/230Vac/277Vac, 100% load
Voltage accuracy	5%
No load voltage	2Wmax.
Efficiency	86%@120-277Vac & 100% load
Output Voltage	27-54V
Ripple and Noise	500mVp-p
Line regulation	5%10



30W, 120-277Vac Input, Constant Current LED Driver

■ Technical Data(cont.)

Load regulation	5%lo					
Turn On Delay Time	Under normal conditions, the maximum delay time is 1s					
Short-Circuit Protection	The Driver's input power will decrease to less than 5W, when short circuit occurs. The driver will auto-recover when the fault is removed					
Open Circuit Protection	When the maximum output voltage is reached, will enter hiccup mode and will go into self-recovery after fault condition is removed.					
Operating Temperature	-25°C to +50°C					
Relative Humidity	10%-90%					
Storage Temperature	-30°C to 70°C					
Storage Humidity	10%-90%, non-condensing (Sea level to 2,000m)					
Altitude	Sea level to 2000m					
Vibration	10 to 500HZ Sweep at constant acceleration of 1.0G (depth: 3.5mm) for 1 hour for each of the perpendicular axes X, Y,Z					
Leakage Current	<0.25mA					
Lifetime	≥ 5 Years@230Vac, 100% load					
MTBF	≥200,000 hours@25°C @230Vac, 80% load (MIL-HDBK-217F)					
Weight	290g					
Dimensions	268x30x20.1mm					
Packing	70pcs/carton; carton dimensions: 390x360x165mm					
Notes:						

- 1. The parameters above including the power factor, THD, efficiency are all tested under the ambient temperature 25C and humidity 50%, AC input 2330Vac and 90% output load.
- 2. lo is rated output current

■ Safety Compliance

Safety	GB19510.1, GB19510.14; EN61347-1, EN61347-2-13; UL8750, CSA C22.2No.250.13-12					
Insulation Resistance	Input to Output >50M Ohms/500Vdc/25°C/70%RH					
	Primary to Secondary: 3750; 5mA; 60S					
Dielectric Strength Hi-Pot	Primary to Earth: 1500; 5mA; 60S					
	Secondary to Earth: 500; 5mA; 60S					
EMI Compliance	GB17743, GB17625.1; EN55015, EN61000-3-2, EN61000-3-3					
EMS Compliance	EN61000-4-2,3,4,5,6,8,11, EN61547					
ESD	Severity Level 3/3 ±8KV, Severity Level 2/2 ±4KV					
RF	80-1000MHZ; Severity Level 2/2 3V/M					
	Performance Criterion A					
EFT	Severity Level 2/2 1KV					
Surge Immunity	Severity Level 2/2 1KV, Severity Level 3/3 2KV, Performance Criterion B					



30W, 120-277Vac Input, Constant Current LED Driver

Disclaimer:

Autec Power Systems' (Autec) LED Drivers are Hi-Pot tested during the manufacturing process. Autec assumes no responsibility for secondary Hi-Pot testing at customer location or designated production line(s). Should customer require further Hi-Pot testing, at their own production line, following assembly of the LED Driver into the customer's assembled fixture, Autec requests advance notice. This request must be communicated to Autec in a timely manner and is recommended to be requested at time of issuing each purchase order.

Dimming Feature


Dimming Function		0-10V			PWM			RX				
		✓			\checkmark			\checkmark				
0-10V	0	1	2	3	4	5	6	7	8	9	10	open
Ir	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	open
PWM	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	open
Ir	0	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	98.5%

Notes:

- 1. Ir is the output current percentages.
- 2. Ir above is typical values.


■ Efficiency vs. Load

Efficiency vs. Load Curve

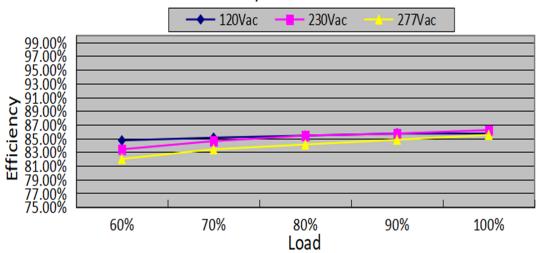


30W, 120-277Vac Input, Constant Current LED Driver


Power Factor vs. Load

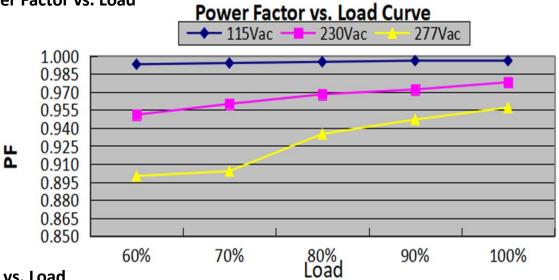

■ THD vs. Load

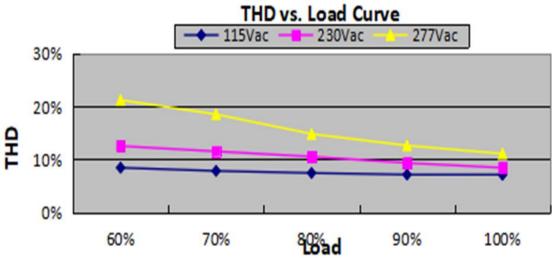

■ Lifetime vs Tc

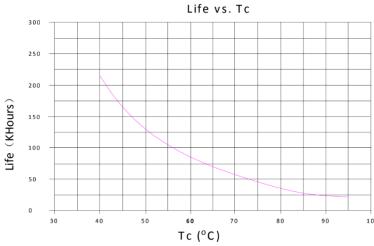

Technical Sales / Customer Service: 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA

+1-818-338-7788

Email: sales@autec.com www.autec.com

November 25, 2019


S=Single Output




30W, 120-277Vac Input, Constant Current LED Driver

Mechanical Diagram

032=Output Power(Watts)

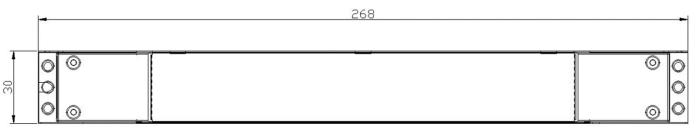

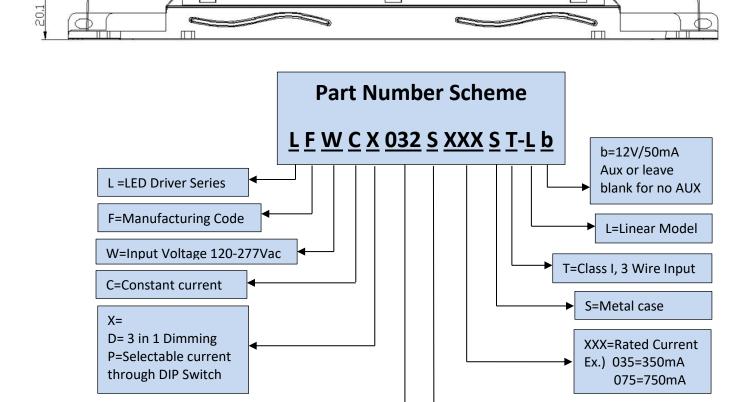

*Product images are for illustrative purposes only and may vary from actual design.

*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.