


■ Features

- Power Rating: 250W
- Input Voltage: 100-277Vac
- Constant current design
- Programmable output current(530mA-4200mA)
- Digital programmability using PC-connected module and software
- Dimmable 0-10V, PWM, time 4 in 1 dimmable
- Efficiency to 93%
- UL Recognized
- OTP, SCP, OVP, and lightning protection
- IP67

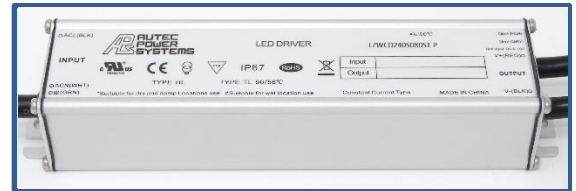

IP67     

*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Outdoor applications: Street lights, and high bays

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
LZWCD250S080ST-P	100-277Vac	250W	188-472V	530mA	800mA	93%	CE FCC UL
LZWCD250S130ST-P	100-277Vac	250W	115-312V	800mA	1300mA	93%	CE FCC UL
LZWCD250S210ST-P	100-277Vac	250W	71-179V	1400mA	2100mA	92%	CE FCC UL
LZWCD250S420ST-P	100-277Vac	250W	36-89V	2800mA	4200mA	92%	CE FCC UL

■ Technical Data

Input voltage range	100-277Vac
Frequency	47~63Hz
Power factor	>0.9@70-100%, refer to PF vs Load curve
THD	<20%@60-100%load, refer to THD vs Load curve
Input current	2.8Amax@110Vac & full load, 1.4Amax@220Vac full load
Inrush current	65A peak, 1.2ms duration@230Vac 25°C
Leakage current	1mA max. @277Vac 60Hz 0.75mAmax @250Vac 50Hz
Rated power	250W
Current Accuracy	±1%
Ripple & Noise (pk-pk)	I _{p-p} : 5%LED Load 60%-100% Load
Turn-on Delay time	1.2s
Output over shoot	10%Io
Output over voltage	130% Vomax

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

February 20, 2019


■ Technical Data(cont.)

Input Under Voltage	Shut Down When $V_{\text{mains}} \leq 85 \pm 5\text{Vac}$; Auto Recovery When $V_{\text{mains}} \geq 90 \pm 5\text{Vac}$
Short circuit protection	Protection type: hiccup mode, recovers automatically after fault condition is removed
Over temperature protection	Decrease output current until over temperature state is removed
Operating temperature	$-40 \sim 70^{\circ}\text{C}$;
Storage temperature	$-40 \sim +85^{\circ}\text{C}$
Humidity operational	10% ~ 100%RH
Humidity storage	5% to 100%RH
MTBF	>280,000 hours @110Vac & 80% Load
Life rating	>50,000 hours
Maximum case Temperature	90°C
Length (L)	8.6" (220mm)
Width (W)	2.68" (68mm)
Height (H)	1.53" (38.8mm)
Weight	1100g

Notes:

1. Unless specified, all the test results are measured in the 25°C ambient temperature.
2. The results vary according to different LED load characteristics.
3. Please confirm working conditions according to the derating curve of output power vs. input voltage and temperature. LED driver recommended for its intended use only, do not exceed data sheet specifications.
4. Refer to lifetime vs. T_c curve.
5. Contact Autec Sales for T_c location.

■ Wiring Diagram

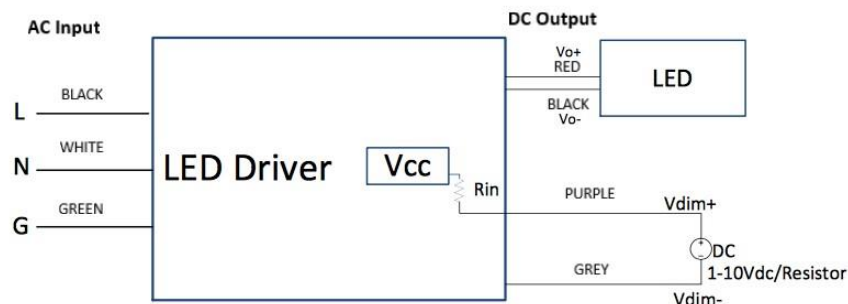

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

February 20, 2019

■ Safety Compliance

Safety Category	Standard
UL 8750	Light Emitting Diode(LED) Equipment for Use in lighting Products
UL 1012	Power Unit Other Than Class 2
IEC 61347-1	Lamp Control Gear Part 1: General and Safety Requirements
IEC 61347-2-13	Lamp Control Gear Part 2-13: Particular Requirements for DC or AC Supplied Electronic Control Gear for LED Modules
EMI Standards	Notes
IEC 55015	Conducted emission test & Radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class ($\geq 75\%$ load)
IEC 61000-3-3	Voltage fluctuations & flicker
FCC Part 15	Class B
EMS Standards	Notes
IEC 61000-4-2	Electrostatic discharge (ESD)
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test L-N:2kV; LN-PE;4kV
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment

■ Dimming


Parameter	Min.	Typ.	Max.
Vcc	-	12V	-
Rin	-	100kOhm	-
Absolute maximum voltage range on the 0-10V input pin	-20V	-	20V
Dimming range	10%	-	100%
Dim off threshold	-	0.5V	-
Dim off hysteresis	-	0.3V	-
0-10V Dimming range	10%(Vdim=0~1V)	-	100%(Vdim=8~10V)
PWM Dimming range	10%(Duty=0-10%)	-	100%(Duty=80-100%)
PWM High	3V	-	10V
PWM Low	0V	-	0.6V
PWM Frequency	300Hz	-	2kHz
External PWM Controller current sinking capability	300uA	-	-

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com


31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

February 20, 2019

■ Dimming Curve

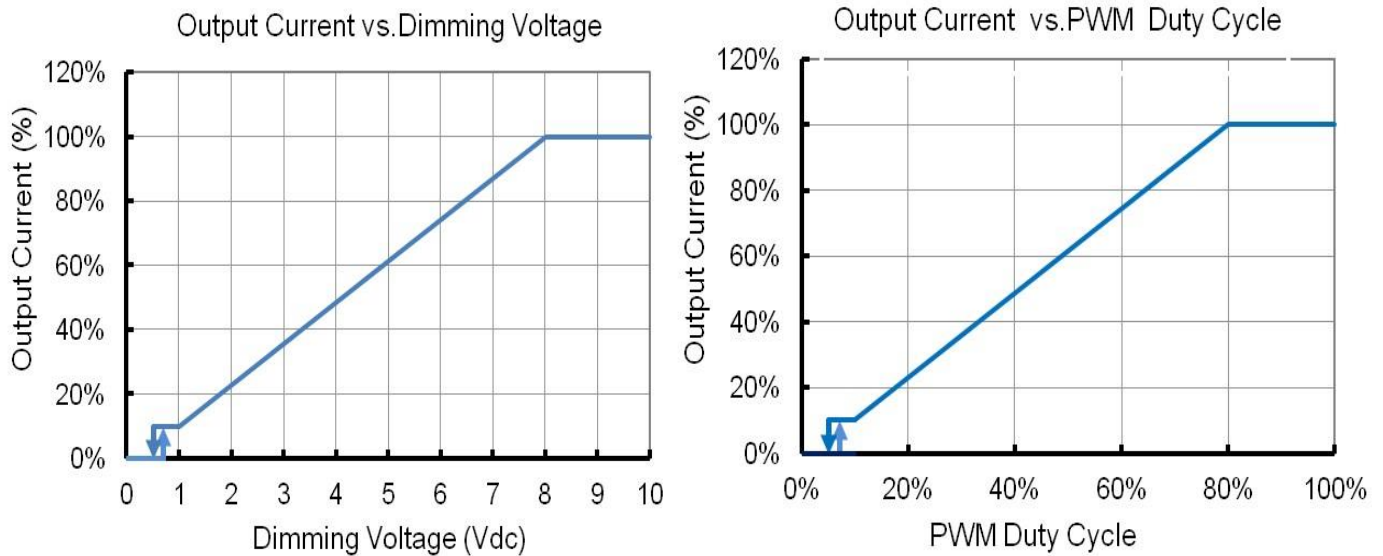

■ Derating Curve

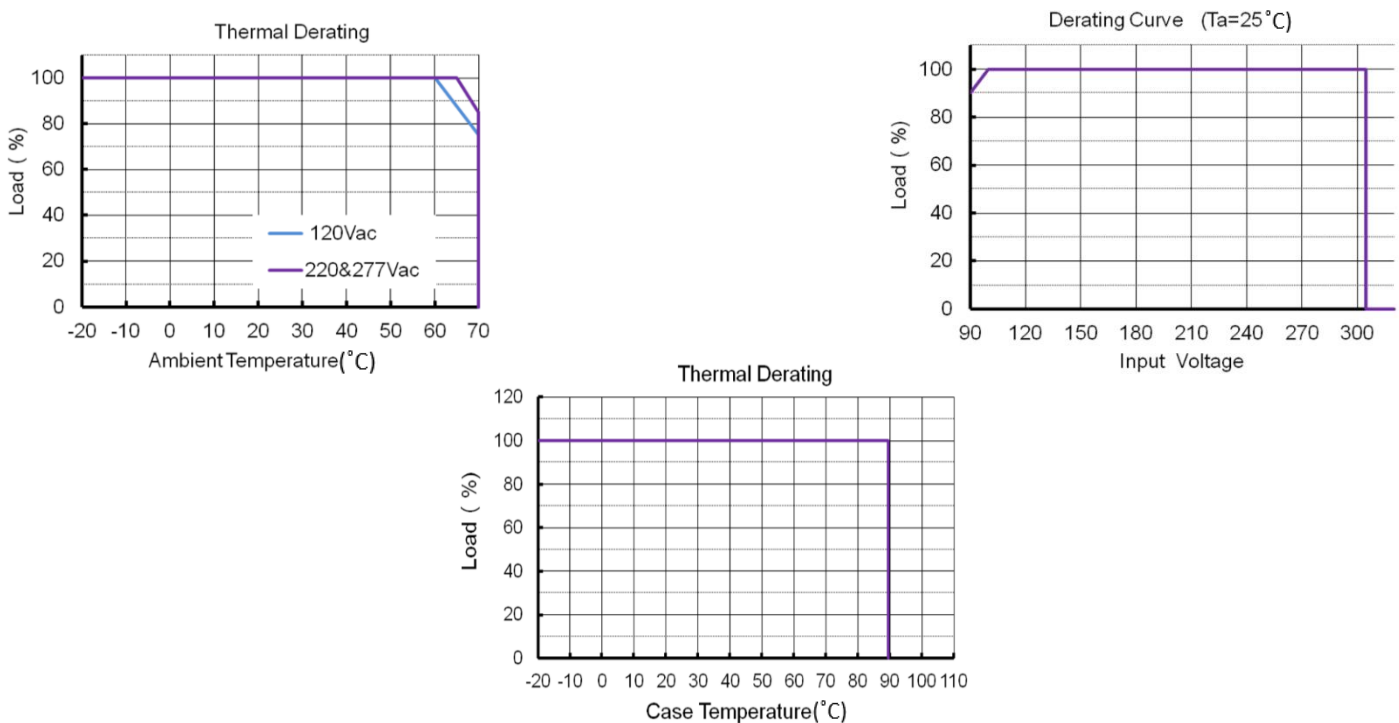


Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com


31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

February 20, 2019





■ Power Factor vs Load

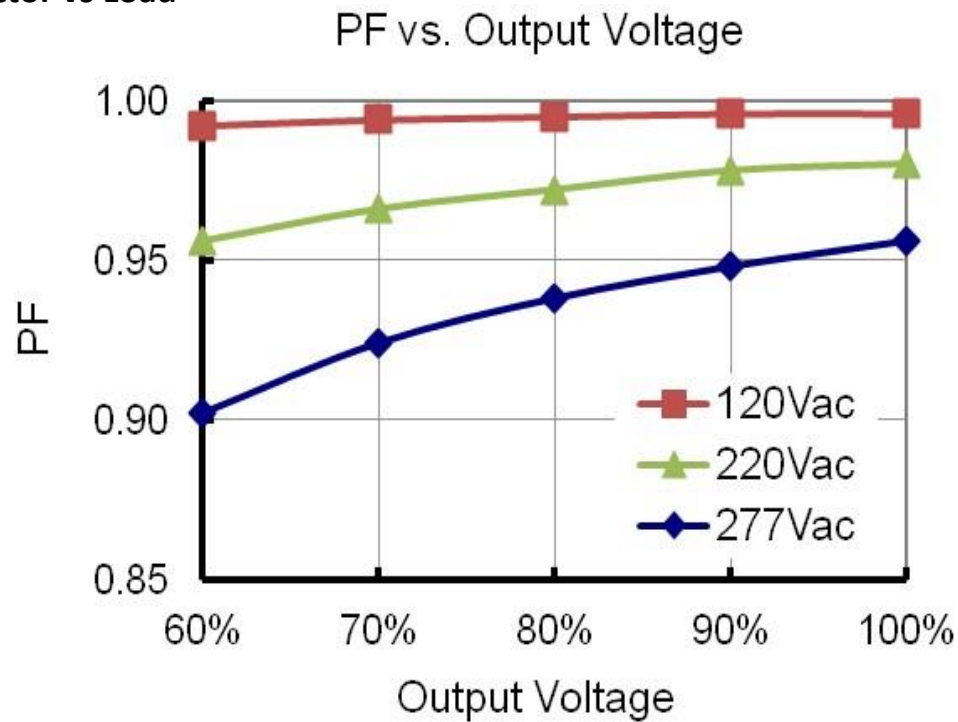

■ Lifetime vs Case Temperature

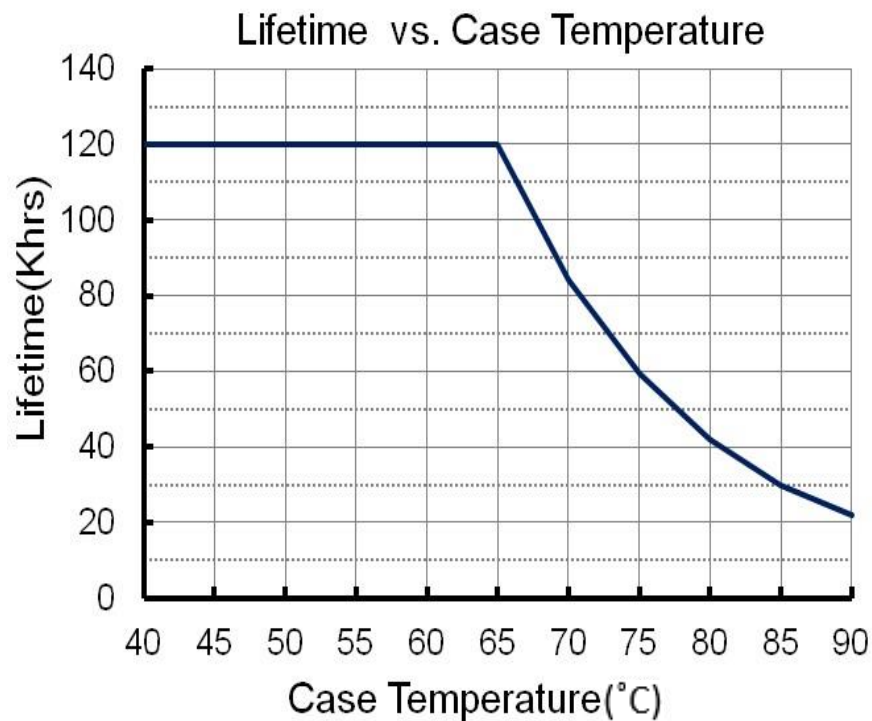


■ **Efficiency vs Load**

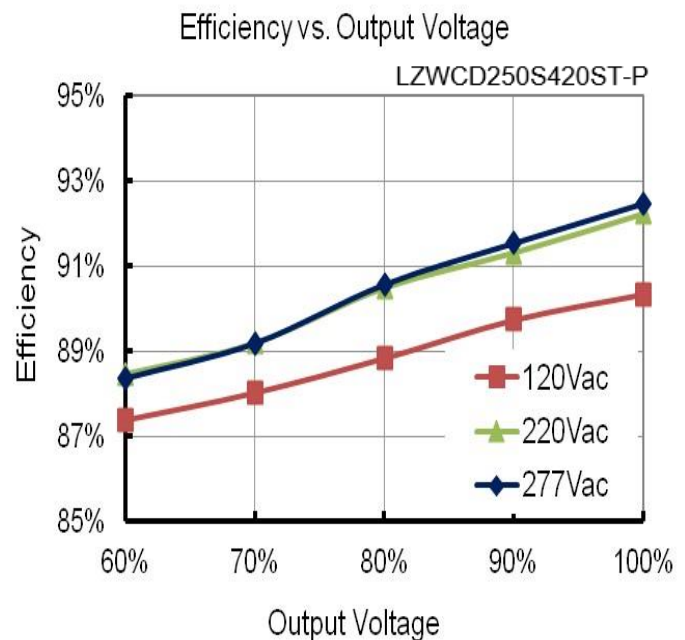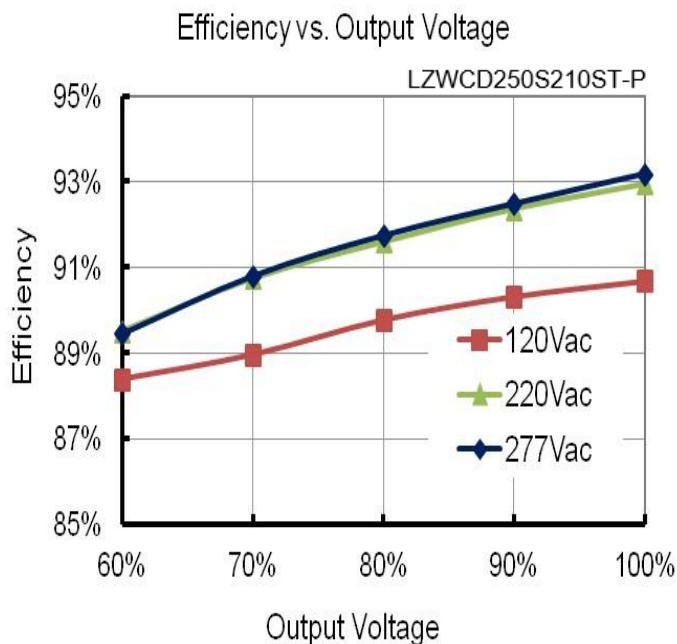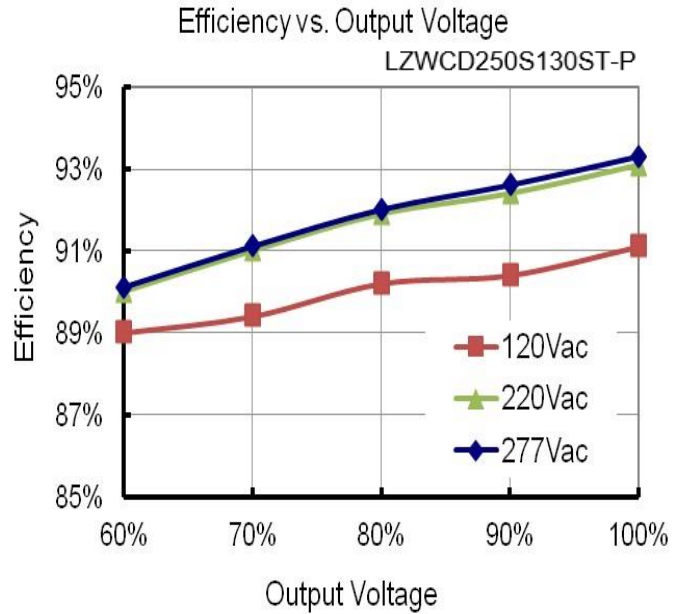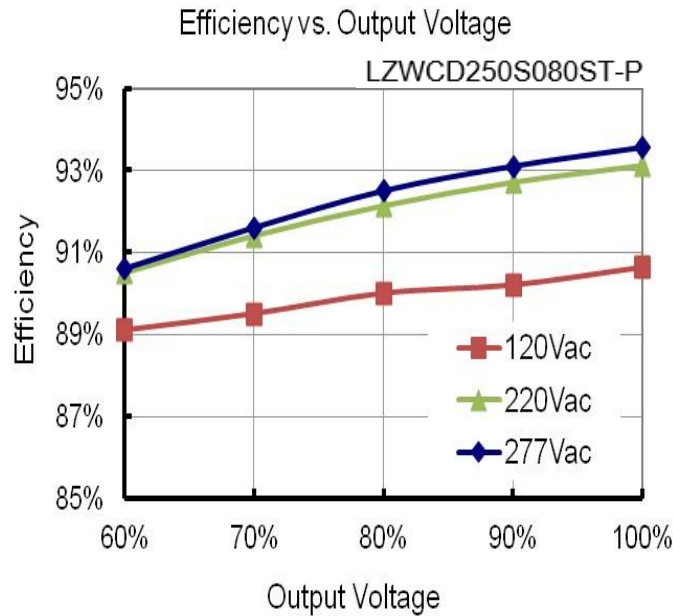

■ **THD vs LOAD**

THD vs. Output Voltage

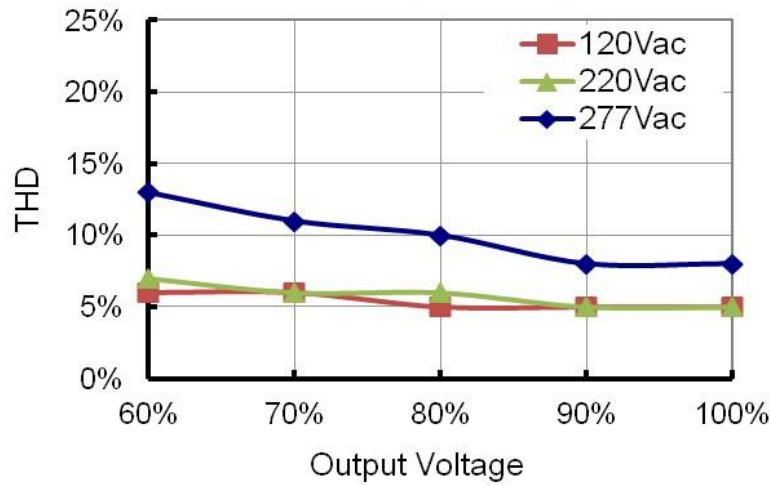

■ **Programmable Operation Area**

Programmable Operation Area



Note: here the points of ABCDE form the operation area, and ABGF form the good performance area.


Model	LZWCD250S080ST-P		LZWCD 250S130ST-P		LZWCD250S210ST-P		LZWCD250S420ST-P	
Item	Io(mA)	Vo (V)	Io(mA)	Vo (V)	Io(mA)	Vo (V)	Io(mA)	Vo (V)
A	530	472	800	313	1400	179	2800	89
B	800	313	1300	192	2100	119	4200	60
C	800	188	1300	115	2100	71	4200	36
D	80	188	130	115	210	71	420	36
E	53	472	80	313	140	179	280	89
F	318	472	480	313	840	179	1680	89
G	800	188	1300	115	2100	71	4200	36

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

February 20, 2019


■ PC Programming Diagram

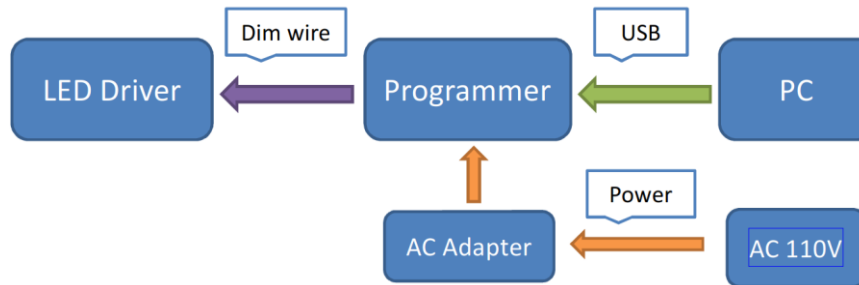

NOTES:

1. To set the desired output current, begin by installing the programming software on your PC and connect the programming module to your PC.
2. Next, connect the LED Driver to the programming module using the Dimming wires.
3. Please note an external power source is needed to provide power to the programming module.
4. Contact Autec Sales for current programming software and complete programming instructions.

■ Mechanical Diagram

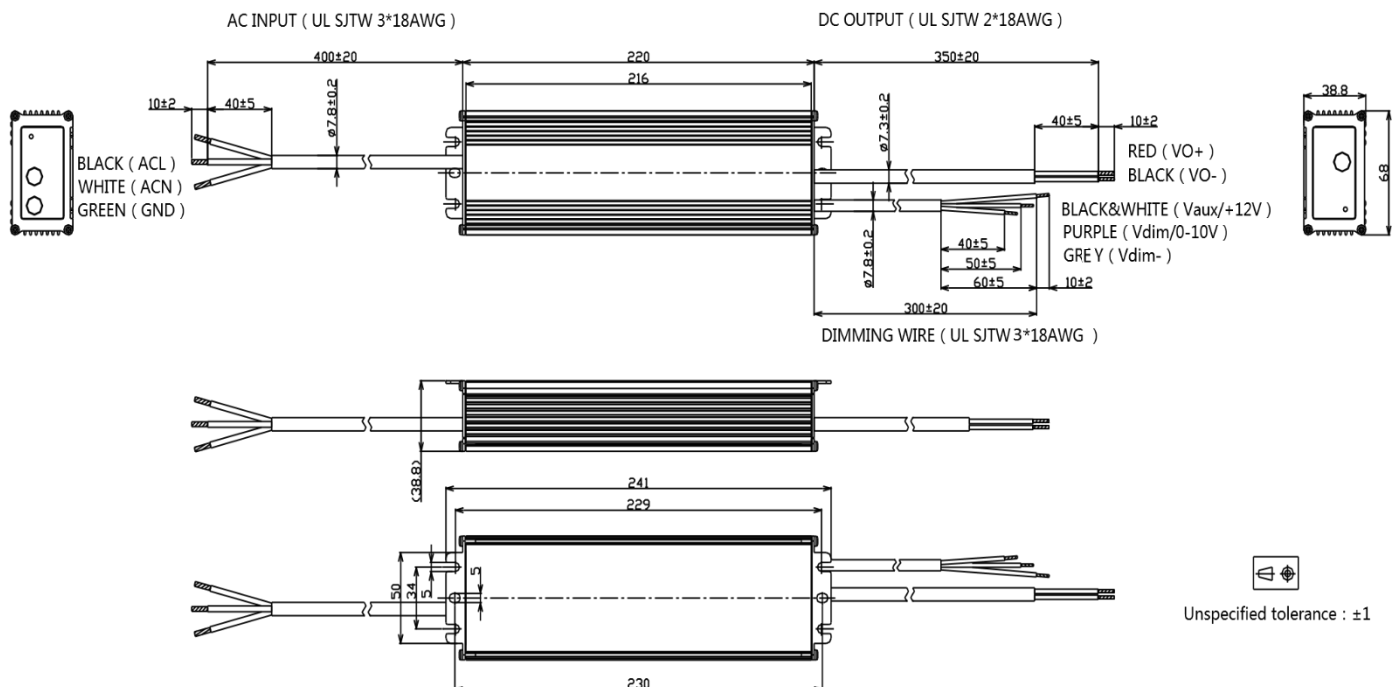


Note: Please make sure the output cable does not connect to dimming cable or the cables of other drivers until 20 seconds after being tested because of the remained voltage in the output capacitor.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com

31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

February 20, 2019

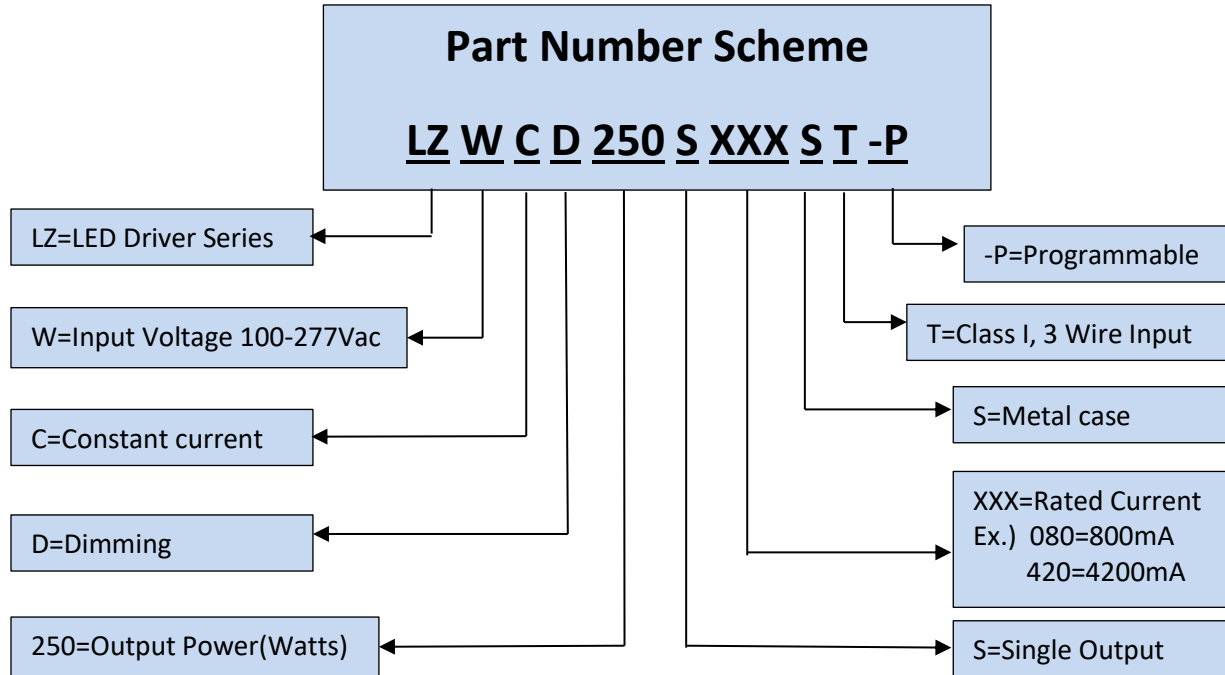

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**