

VALU-BEAM® Series Opposed Mode Sensor Pairs



Datasheet

Opposed mode sensor pairs with enhanced sunlight immunity



WARNING:

- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

Model ¹	Description	Code	Connection	Recommended Accessory Cable
SM91EAN	Emitter	A	6.5 ft attached cable	
SM91EANQD			3-pin Mini-style quick disconnect (QD)	MBCC-312
SM91RAN	Receiver	A	6.5 ft attached cable	
SM91RANQD			4-pin Mini-style quick disconnect (QD)	MBCC-412
SM91EBN	Emitter	B	6.5 ft attached cable	
SM91EBNQD			3-pin Mini-style quick disconnect (QD)	MBCC-312
SM91RBN	Receiver	B	6.5 ft attached cable	
SM91RBNQD			4-pin Mini-style quick disconnect (QD)	MBCC-412
SM91ECN	Emitter	C	6.5 ft attached cable	
SM91ECNQD			3-pin Mini-style quick disconnect (QD)	MBCC-312
SM91RCN	Receiver	C	6.5 ft attached cable	
SM91RCNQD			4-pin Mini-style quick disconnect (QD)	MBCC-412

Overview

These rugged, powerful VALU-BEAM® opposed mode emitter/receiver pairs are designed to function in difficult environments. Excess gain is conservatively rated at 100x at an emitter-to-receiver separation distance of 3 meters (10 ft).

Receivers will not false-trigger when pointed directly into a light source of 120,000 lux. Even under these conditions, a receiver will respond only to the light signal from its modulated emitter. Receivers are also immune to false triggering by sunlight reflected from water droplets.

Receivers are immune to interference from flashing strobe lights as are typically found on plant lift trucks. Sensors are also immune to interference from a 5 Watt handheld transceiver, operating on specified frequencies, held 6 inches away from the sensor.

Emitters and receivers that are to be used together must carry the same modulation code designation (A, B, or C). Sensor pairs of one code may be used alongside sensor pairs of another code, without interference or crosstalk.

These sensors are ruggedly constructed in reinforced, molded, PBT polyester housings with replaceable acrylic lenses. Electronics are fully epoxy-encapsulated. Sensors are constructed to NEMA 6P (IEC IP67) standards. These sensors will withstand temporary submersion. Operating temperature range is -20 °C to +70 °C (-4 °F to +158 °F).

The sensors operate from 10 to 30 V dc (reverse polarity and short-circuit protected). Receivers have one solid-state light-operate PNP (sourcing) output and one solid-state light-operate NPN (sinking) output with a continuous load capability of 150 mA maximum (each output). A green indicator LED on each emitter lights whenever the infrared sensing beam is being emitted. Receivers have Banner's patented AID™ (Alignment Indicating Device) system², which lights a red LED whenever the output is conducting and pulses the LED at a rate proportional to the strength of the received light signal.

Sensor Codes and Response Times

Emitters and receivers that are to be used together must carry the same code letter. Sensors of one code may be used side-by-side with sensors of another code, without interference or crosstalk. Sensor pairs carrying the same code must be separated by a minimum side-to-side distance of 22 inches (assuming an emitter/receiver separation distance of 10 feet; see beam pattern) to avoid crosstalk.

The codes A, B, and C are used to designate different sensing pulse modulation frequencies and different intervals between sets of pulses. These design differences are necessary to enable differently coded sensor pairs to operate in close proximity without interfering with each other.

These internal timing differences result in differing response times to light and dark signals in the differently-coded sensor pairs. See [Table 1](#) on p. 2 for the response times when each sensor pair is operated alone, outside the field of view of another sensor pair.

¹ To order the 30 meter attached cable models, add a "W/30" to the standard cabled model number. For example, SM91EAN W/30.

² U.S. patent number 4356393



Table 1: Response time of individual sensor pairs, alone

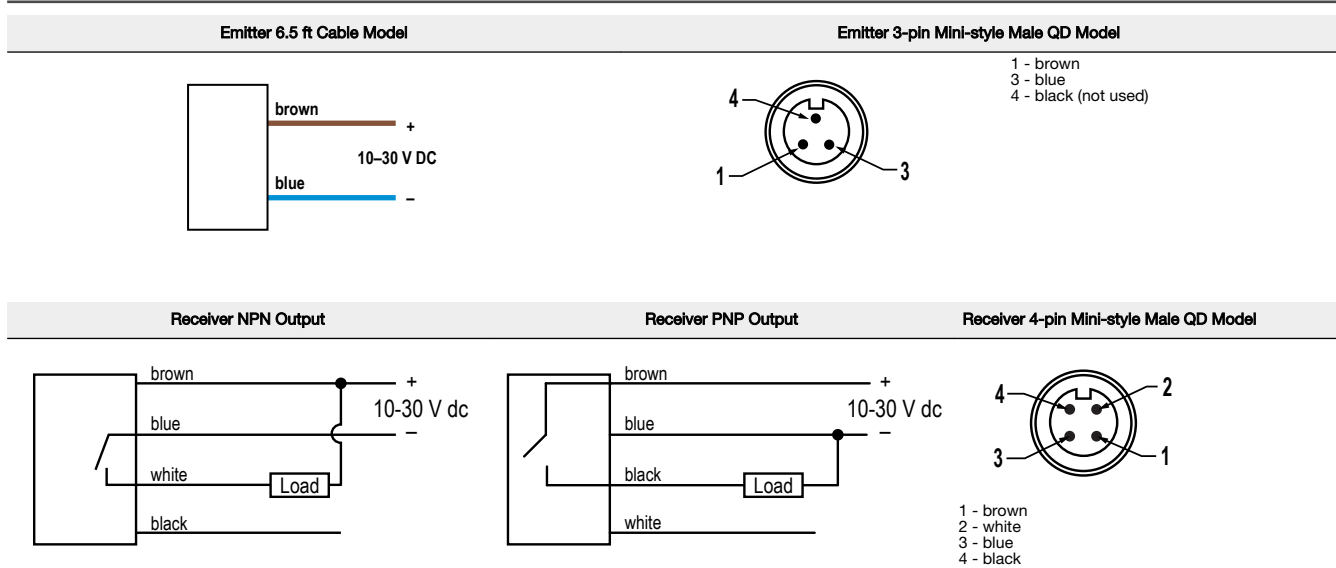
	Sensor Codes		
	A	B	C
Response to dark signal	12 ms	20 ms	20 ms
Response to light signal	20 ms	17 ms	28 ms

Differently-coded sensor pairs in a common field of view may not perform as described in Table 1 on p. 2. To prevent unwanted response, a receiver operating under worst-case conditions may require some additional time to verify that the signal it sees is actually coming from its own companion emitter. These worst-case response times are given in Table 2 on p. 2.

Table 2: Response time of adjacent sensor pairs in a common field of view

	Sensor Codes		
	A + B	A + C	A + B + C
Response to dark signal	A = 12 ms; B = 20 ms	A = 12 ms; C = 20 ms	A = 12 ms; B = 20 ms; C = 40 ms
Response to light signal	Doubles A, B	Doubles A, C	Triples A, B, C

Wiring Diagrams



Specifications

Supply Voltage

10 to 30 V dc at 20 mA maximum for receivers (exclusive to load current) and 25 mA maximum for emitters

Sensor Beam

Opposed mode
Modulated infrared, 880 nm

Range

100x excess gain at 3 m (10 ft) emitter-receiver separation distance (see excess gain curve)

Effective Beam Diameter

25 mm (1 in)

Sunlight Immunity

Receivers may be pointed into a light source of 120,000 lux without false-triggering, and will still respond only to the infrared beam from their modulated emitters. Receivers will not respond to sunlight reflected from water spray droplets.

Construction

Reinforced black PBT polyester housing, electronics are epoxy-encapsulated
Lenses: Molded, replaceable acrylic

Connection

2 m (6.5 ft) or 9 m (30 ft) attached PVC-jacketed cable; or integral mini-style quick disconnect (QD) fitting. QD connector housing and pins are isolated to 2500 V.

Indicators

Top-mounted LED indicator.
Red LED on (receiver): Output is conducting
Red LED flashing (receiver): Pulses at a rate proportional to the strength of the received light signal.
Green LED on (emitter): Infrared sensing beam is "on"

Operating Temperature Range

-20 °C to +70 °C (-4 °F to +158 °F)

Response Time

12 to 28 ms, depending upon code

Output Configuration

Bipolar solid-state dc PNP sourcing and NPN sinking outputs, light operate only (outputs conduct when the receiver sees the modulated light from its emitter)

Output Rating

150 mA maximum (continuous, each output)
OFF-state leakage current: 100 µA, maximum
ON-state saturation voltage: < 1 V at 10 mA and < 2 V at 150 mA (PNP); < 200 mV at 10 mA and < 1 V at 150 mA (NPN)

Environmental Rating

NEMA 6P; IEC IP67

Water Immersion

Emitters and receivers are rated NEMA 6P (IEC IP67). Sensors continue to operate during and after being submerged in water at a depth of 6 feet for a period of 48 hours. Immersion greatly reduces the efficiency of the lens, which results in greatly diminished sensing range.

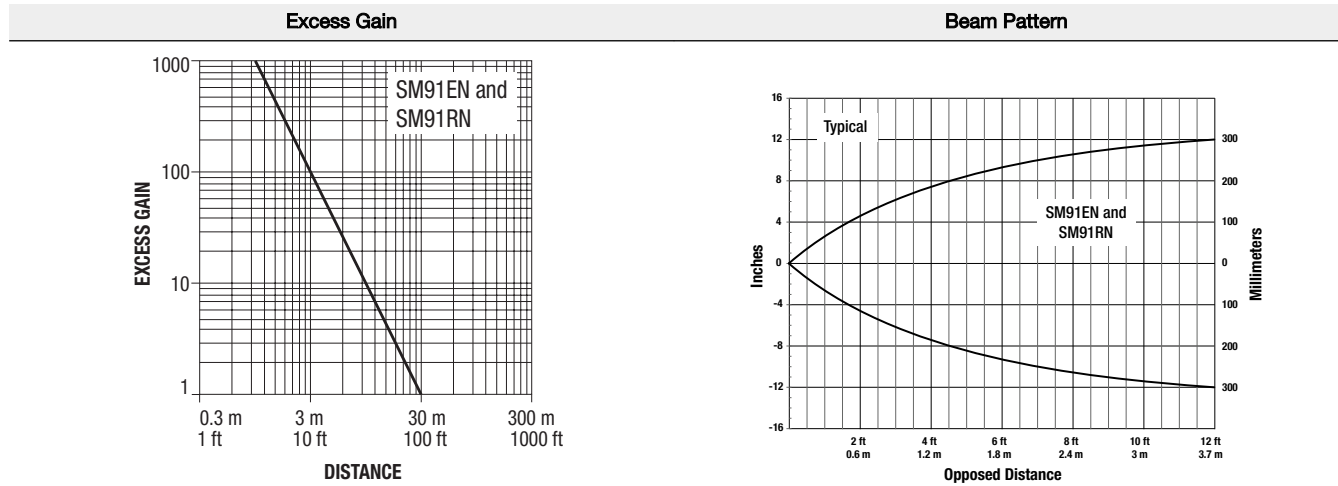
Strobe Light Immunity

Receivers are immune to one Federal Signal Corp. "Fireball" model FB2PST strobe.

EMI-RFI Immunity

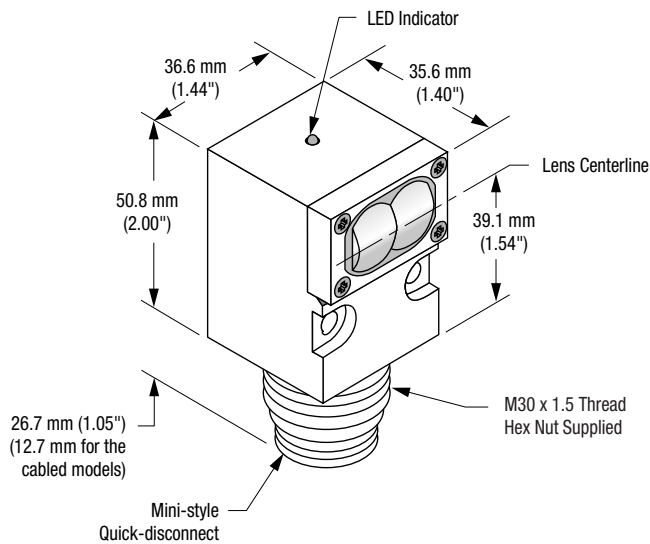
Emitters and receivers will not respond to transmissions from a 5 Watt output handheld transceiver on the test frequencies of 464.500 and 151.625 MHz when the transceiver's antenna is held 6 inches or more away from the sensor.

Performance Curves



Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise.





Accessories




Cordsets for Emitters

3-Pin Mini-Style Cordsets				
Model	Length	Style	Dimensions	Pinout (Female)
MBCC-306	1.83 m (6 ft)	Straight		<p>1 = Brown 3 = Blue 4 = Black</p>
MBCC-312	3.66 m (12 ft)			
MBCC-330	9.14 m (30 ft)			

Cordsets for Receivers

4-Pin Mini-Style Cordsets—Single Ended				
Model	Length	Style	Dimensions	Pinout (Female)
MBCC-406	1.83 m (6 ft)	Straight		 <p>1 = Brown 2 = White 3 = Blue 4 = Black</p>
MBCC-412	3.66 m (12 ft)			
MBCC-430	9.14 m (30 ft)			

Brackets

<p>SMB30MM</p> <ul style="list-style-type: none"> 12-ga. stainless steel bracket with curved mounting slots for versatile orientation Clearance for M6 (1/4 in) hardware Mounting hole for 30 mm sensor  <p>Hole center spacing: A = 51, A to B = 25.4 Hole size: A = 42.6 x 7, B = 25.4, C = 25.4</p>	<p>SMB30C</p> <ul style="list-style-type: none"> 30 mm split clamp, black PBT bracket Stainless steel mounting hardware included Mounting hole for 30 mm sensor  <p>Hole center spacing: A = 45 Hole size: B = 27.2</p>
<p>SMB30S</p> <ul style="list-style-type: none"> Swivel bracket with 30 mm mounting hole for sensor Adjustable captive swivel ball Black reinforced thermoplastic polyester Stainless steel mounting and swivel locking hardware included  <p>Hole center spacing: A = 45 Hole size: B = 27.2</p>	

Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.