



## Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760  
607-754-9187 Fax 607-754-9255  
<http://www.ergpower.com>

# Specifications and Applications Information

03/26/08

Preliminary

# 8mA23524F




## Two Lamp DC to AC Inverter

The ERG 8mA23524F (8m Class) low profile dc to ac inverter is specifically designed to power the AU Optronics G065VN01 LCD display module to a moderate brightness level from a +12 volt dc source.

This low profile inverter features:

- ✓ Less Than 8 mm in Height
- ✓ LCD Module Specific
- ✓ Display Compatible Output Connector
- ✓ Firm Specifications
- ✓ Application Information
- ✓ Designed, Manufactured and Supported in the USA
- ✓ Custom Input and Output Voltages
- ✓ Flexible System Interface
- ✓ Notebook Display Head Compatible

## Package Configuration

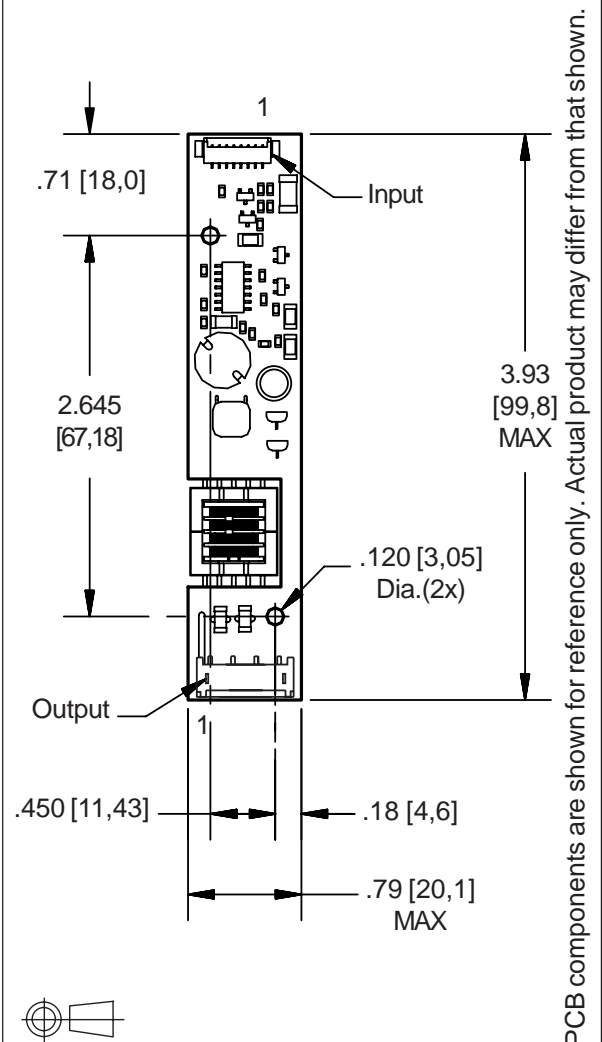

## Pin Descriptions

J1-1 +Vin  
J1-2 +Vin  
J1-3 GND  
J1-4 GND  
J1-5 N/C  
J1-6 Enable  
J1-7 N/C  
J1-8 GND

J2-1 ACout  
J2-2 ACout  
J2-3 ACreturn  
J2-4 ACreturn

## 8mA Package

PCB components are shown for reference only.  
Actual product may differ from that shown.

## Connectors

Input J1  
Molex 53261-0871

Output J2  
JST SM04(4.0)B-BHS-1-TB

**Absolute Maximum Ratings**

Rating	Symbol	Value	Units
Input Voltage Range	$V_{in}$	-0.3 to +13.2	Vdc
Storage Temperature	$T_{stg}$	-40 to +85	°C

**Operating Characteristics**

With a load simulating the referenced display and lamp warm-up of 5 minutes.  
 Unless otherwise noted  $V_{in} = 12.00$  Volts dc and  $T_a = 25^{\circ}\text{C}$ .

Characteristic	Symbol	Min	Typ	Max	Units
Input Voltage	$V_{in}$	+10.8	+12.0	+12.6	Vdc
Component Surface Temperature (Note 2)	$T_s$	-20	-	+80	°C
Input Current (Note 1)	$I_{in}$	-	0.41	0.47	Adc
Operating Frequency	$F_o$	30	35	40	kHz
Minimum Output Voltage (Note 3)	$V_{out} \text{ (min)}$	1500	-	-	Vrms
Efficiency	<b>h</b>	-	77	-	%
Output Current (per lamp)	$I_{out}$	-	5.1	-	mArms
Output Voltage	$V_{out}$	-	370	-	Vrms
Enable Pin Input Current Requirement (Note 4)	$I_{Enable}$	-	3.2	-	mAdc

Specifications subject to change without notice.

(Note 1) Input current in excess of maximum may indicate a load/inverter mismatch condition, which can result in reduced reliability. Please contact ERG technical support.

(Note 2) Surface temperature must not exceed 80 degrees C; thermal management actions may be required.

(Note 3) Provided data is not tested but guaranteed by design.

(Note 4) Required User Enable/Disable Circuit is shown on page 3.

**Application Notes:**

- 1) The minimum distance from high voltage areas of the inverter to any conductive material should be .12 inches per kilovolt of starting voltage.
- 2) Mounting hardware to be non-conductive.
- 3) Open framed inverters should not be used in applications at altitudes over 10,000 feet.
- 4) Contact ERG for possible exceptions.




**Endicott Research Group, Inc.**

2601 Wayne St., Endicott, NY 13760  
 607-754-9187 Fax 607-754-9255  
<http://www.ergpower.com>



## Dimming Option

### Required User Enable/Disable Interface Circuit

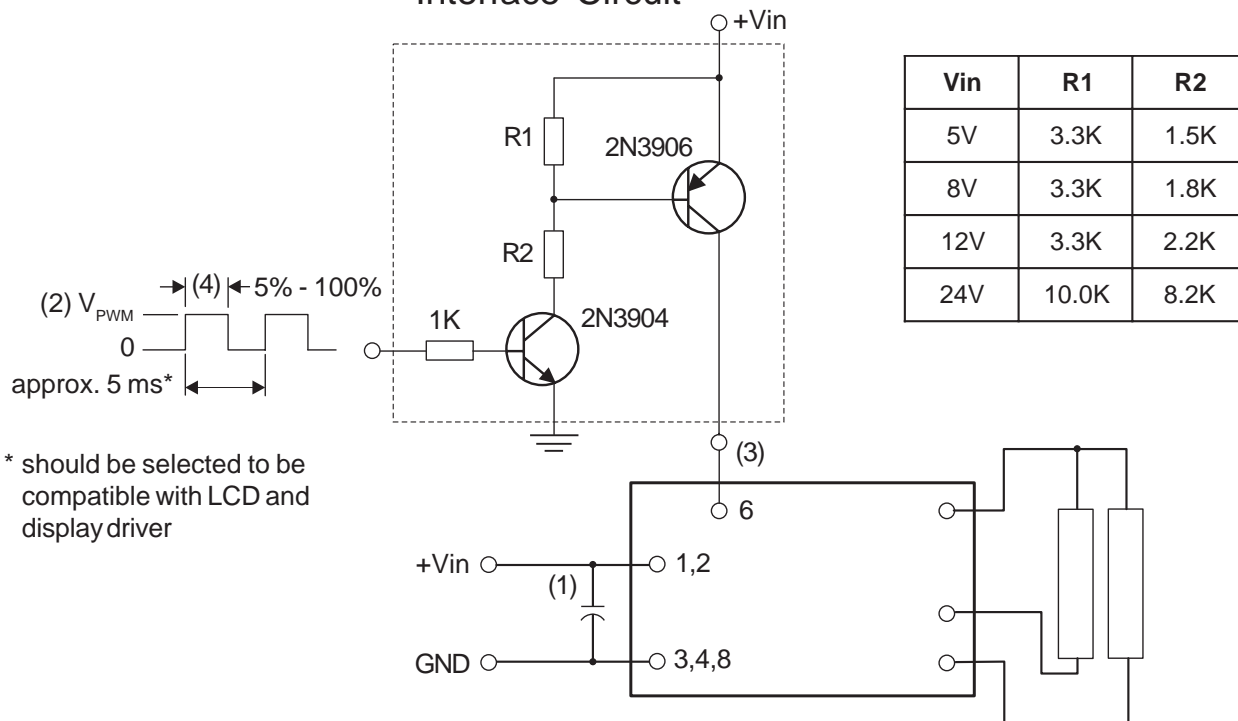

- (1) Low ESR type input by-pass capacitor (22  $\mu$ F - 100  $\mu$ F) may be required to reduce reflected ripple.
- (2)  $V_{PWM}$  from 2.4V to less than or equal to 13.2V.
- (3) Full brightness without PWM control requires that pin 6 be tied to +Vin. Pin 6 must be at 0V to turn off.
- (4) Duty Cycle 5% - 100%.



Endicott Research Group, Inc. (ERG) reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by ERG is believed to be accurate and reliable. However, no responsibility is assumed by ERG for its use.