

AC TO DC EXTERNAL UN-REGULATED WALLMOUNT ADAPTOR DIVERSE AC PLUGS SINGLE OUTPUT 8.4-9.6 WATTS LINEAR POWER ADAPTORS APS41EA SERIES



FEATURES:

- COST EFFECTIVE UN-REGULATED ADAPTORS
- WORLDWIDE DIVERSE AC PLUGS
- MEET USA OR EUROPEAN STANDARD
- LOW NOISE MEET EMI REQUIREMENT
- CE MARKING COMPLIANCE

SPECIFICATION

INPUT SPECIFICATION

Input Voltage: Nominal 100/110/120Vac or 220/230/240 Vac. Custom Vac available
Input Range: Typical $\pm 8.0\%$
Input Connector: Wallmount format AC plugs WM1,2 (USA/Japan)/ WM3(Euro-stecker)/ WM5 (UK)/WM6 (Australia)
Input Frequency: 100 to 120Vac / 60Hz typical
 220 to 240Vac / 50Hz typical
Input Current: 120mA max. @120Vac/60Hz
 60mA max. @230Vac/50Hz
Dielectric Withstand: Meets IEC 950
EMI: Inherent low conducted and radiated noise level, meets EN55022 & FCC class B


OUTPUT SPECIFICATION

Output Voltage: See Ratings Chart
Output Current: See Ratings Chart
Output Wattage: Max.9.6 VA @115Vac/60Hz input
 Max. 8.4 VA @230Vac/50Hz input
Output Connector: Optional
Noise & Ripple: Typ. 20% peak to peak
Overload Protection: None, only by thermal protection
Thermal Protection: Thermal fuse installed inside the input transformer

GENERAL SPECIFICATION

Circuit Topology: Line frequency lamination steel transformer circuit
Safety Standard: UL1950 & CSA C22.2 NO. 950 or IEC 950 Class I & II
Operating Temperature: 0 to +40°C
Storage Temperature: -20°C to +85°C
Cooling: Free air convection
Construction: Impact resistant plastic enclosure case
Wallmount format in EI-41 case

MODEL NO. DESCRIPTION: APS41EA — X X X Y Y Y - N

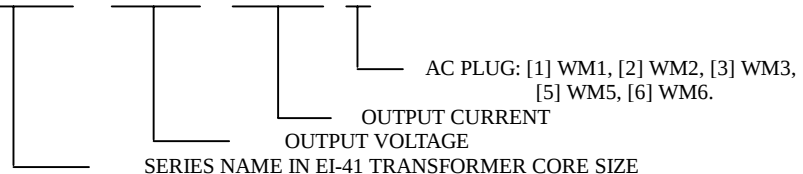

OUTPUT VOLTAGE/CURRENT RATINGS CHART

U.S.A VERSION Input Voltage: 100-120Vac/120mA @60Hz.

DEFINED O/P VOLTAGE (Vdc)	OUTPUT VOLTAGE (Vdc) / CURRENT (A)
3.0 Vdc < Any Voltage > 24.0 Vdc	3.0-5.0V/1.5-1.3A, 5.5-7.0V/1.25-1.10A, 7.5-9.50V/1.05-0.90A, 10.0-12.0V/0.85-0.65A, 12.5-15.0V/0.63-0.56A, 15.5-17.5V/5.5-5.1A, 18.0-19.5V/0.50-0.47A, 20.0-22.0V/0.46-0.42A, 22.5-24.0V/0.41-0.4A.

Note: Refer to the upper Chat or consult factory for the exact Model No. and V/A.

SINGLE OUPUT (Model No. for examples)

MODEL NO.	AC PLUG	I/P VOLTAGE(Vac)	O/P VOLTAGE (Vdc)	O/P CURRENT (A)
APS41EA-035150-1	WM1	120Vac	3.5V	1.50A
APS41EA-050130-2	WM2	120Vac	5.0V	1.30A
APS41EA-095090-1	WM1	120Vac	9.5V	0.90A
APS41EA-120065-2	WM2	120Vac	12.0V	0.65A
APS41EA-155055-1	WM1	120Vac	15.5V	0.55A
APS41EA-180050-2	WM2	120Vac	18.0V	0.50A
APS41EA-240040-1	WM1	120Vac	24.0V	0.40A

EUROPEAN VERSION Input Voltage 230Vac/60mA @50Hz.

DEFINED O/P VOLTAGE (Vdc)	OUTPUT VOLTAGE (Vdc) /CURRENT (A)
5.0 Vdc < Any Voltage > 24.0 Vdc	5.0-6.5V/1.3A-1.1A, 7.0-8.5V/1.0-0.85A, 9.0-10.50V/0.80-0.65A, 11.0-12.5V/0.65-0.59A, 13.0-15.0V/0.58-0.55A, 15.5-17.5V/5.4-0.48A, 18.0-19.5V/0.46-0.43A, 20.0-22.0V/0.42-0.38A, 22.5-24.0V/0.37-0.35A.

Note: Refer to the upper Chat or consult factory for the exact Model No. and V/A.

SINGLE OUPUT (Model No. for examples)

MODEL NO.	AC PLUG	I/P VOLTAGE(Vac)	O/P VOLTAGE (Vdc)	O/P CURRENT (A)
APS41EA-050130-3	WM3	220Vac	5.0V	1.30A
APS41EA-075095-5	WM5	240Vac	7.5V	0.95A
APS41EA-090080-6	WM6	240Vac	9.0V	0.80A
APS41EA-120060-3	WM3	220Vac	12.0V	0.60A
APS41EA-150055-5	WM5	240Vac	15.0V	0.55A
APS41EA-180046-3	WM3	220Vac	18.0V	0.46A
APS41EA-240035-6	WM6	240Vac	24.0V	0.35A

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 285g(10.00Oz.)

