

**FEATURES**

- ▶ DIP-24 Metal Package  
31.8 x 20.3 x 10.2 mm (1.25 x 0.8 x 0.4 inches)
- ▶ Ultra-wide 4:1 Input Range
- ▶ Excellent Load and Line Regulation
- ▶ Operating Ambient Temp. Range -40°C to +85°C
- ▶ Short Circuit Protection
- ▶ I/O-isolation 1500VDC
- ▶ 3 Years Product Warranty



CSA 60950-1

**PRODUCT OVERVIEW**

The MINMAX MIW2300 series is a range of isolated 3W DC-DC converter modules featuring fully regulated output voltages and ultra-wide 4:1 input voltage ranges. The product comes in a shielded metal DIP-24 package with standard pinout. An high efficiency allows an operating temperature range of -40°C to +85°C.

Typical applications for these converters are in battery operated equipment and instrumentation, distributed power systems, data communication and general industrial electronics.

**Model Selection Guide**

Model Number	Input Voltage (Range)	Output Voltage	Output Current		Input Current		Reflected Ripple Current	Max. capacitive Load	Efficiency (typ.) @Max. Load
			Max.	Min.	@Max. Load	@No Load			
			VDC	mA	mA	mA(typ.)	mA(typ.)	mA(typ.)	μF %
MIW2321	24 (9 ~ 36)	3.3	750	93	138	20	15	680	75
MIW2322		5	600	75	158				470
MIW2323		12	250	32	154				330
MIW2324		15	200	25	152				220
MIW2326		±12	±125	±16	156				150#
MIW2327		±15	±100	±13	156				100#
MIW2331	48 (18 ~ 75)	3.3	750	93	68	10	10	680	76
MIW2332		5	600	75	78				470
MIW2333		12	250	32	75				330
MIW2334		15	200	25	74				220
MIW2336		±12	±125	±16	76				150#
MIW2337		±15	±100	±13	76				100#

# For each output

**Input Specifications**

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	24V Input Models	6	7.5	9	
	48V Input Models	12	15	18	
Under Voltage Shutdown	24V Input Models	---	---	8.5	
	48V Input Models	---	---	16	
Short Circuit Input Power	All Models	---	---	2000	mW
Input Filter		Internal Pi Type			
Conducted EMI		Compliance to EN 55022, class A			

### Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	$\pm 2.0$	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads	---	$\pm 0.5$	$\pm 3.0$	%
Line Regulation	$V_{in} = \text{Min. to Max. @ Full Load}$	---	$\pm 0.2$	$\pm 1.0$	%
Load Regulation	$I_{out} = \text{Min. to Max.}$	---	$\pm 0.3$	$\pm 1.0$	%
Ripple & Noise	0-20 MHz Bandwidth	---	40	75	mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change	---	150	500	μsec
Transient Response Deviation		---	$\pm 3$	---	%
Temperature Coefficient		---	$\pm 0.01$	$\pm 0.02$	%/°C
Over Load Protection	Foldback	110	300	---	%
Input Filter	All Models	Internal Pi Type			
Short Circuit Protection		Continuous, Automatic Recovery			


### General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Second	1800	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100kHz, 1V	---	380	500	pF
Switching Frequency		250	---	350	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000			Hours
Safety Approvals	UL/cUL 60950-1 recognition (CSA certificate)				

### Environmental Specifications

Parameter		Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)		-40	+85	°C
Case Temperature		---	+100	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C


### Power Derating Curve

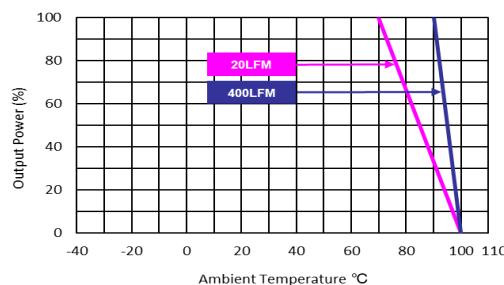

### Notes

- 1 Specifications typical at  $T_a=+25^\circ\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 4 We recommend to protect the converter by a fast blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact MINMAX.
- 6 Specifications are subject to change without notice.

### Package Specifications

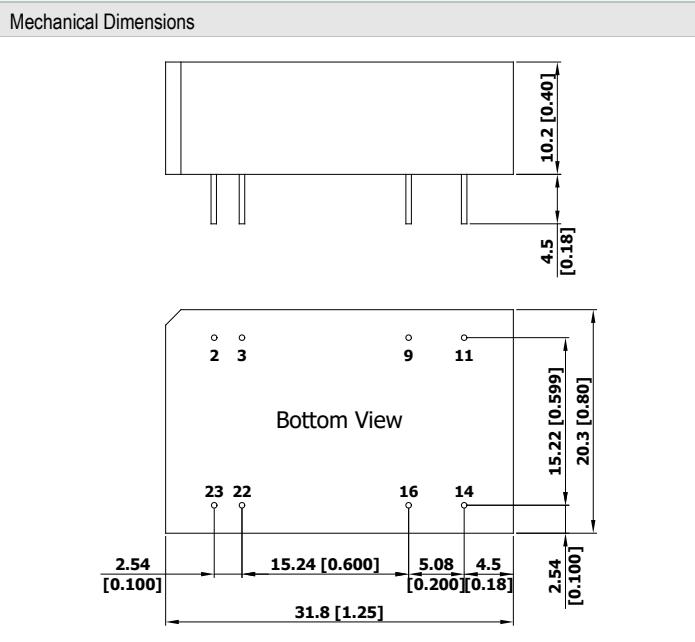

Pin Connections			
Pin	Single Output	Dual Output	Diameter mm (inches)
2	-Vin	-Vin	Ø 0.5 [0.02]
3	-Vin	-Vin	Ø 0.5 [0.02]
9	No Pin	Common	Ø 0.5 [0.02]
11	NC	-Vout	Ø 0.5 [0.02]
14	+Vout	+Vout	Ø 0.5 [0.02]
16	-Vout	Common	Ø 0.5 [0.02]
22	+Vin	+Vin	Ø 0.5 [0.02]
23	+Vin	+Vin	Ø 0.5 [0.02]

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)  
X.XX±0.13 (X.XXX±0.005)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)

### Physical Characteristics


Case Size	:	31.8x20.3x10.2mm (1.25x0.80x0.40 inches)
Case Material	:	Plastic resin (flammability to UL 94V-0 rated)
Pin Material	:	Phosphor Bronze
Weight	:	12.2g

## Test Setup

### Input Reflected-Ripple Current Test Setup


Input reflected-ripple current is measured with a inductor Lin (4.7 $\mu$ H) and Cin (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 kHz) to simulate source impedance.

Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

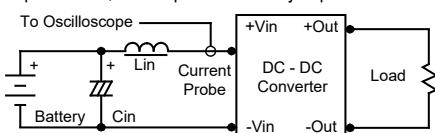

### Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.47 $\mu$ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

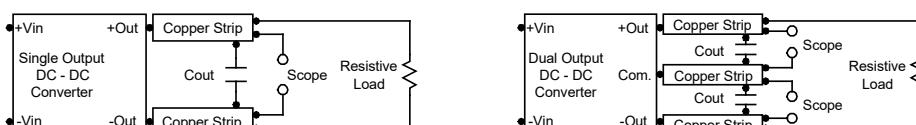

## Technical Notes


### Overcurrent Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

### Input Source Impedance


The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 kHz) capacitor of a 4.7 $\mu$ F for the 24V input devices and a 2.2 $\mu$ F for the 48V devices.

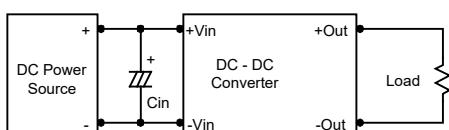

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 $\mu$ F capacitors at the output.

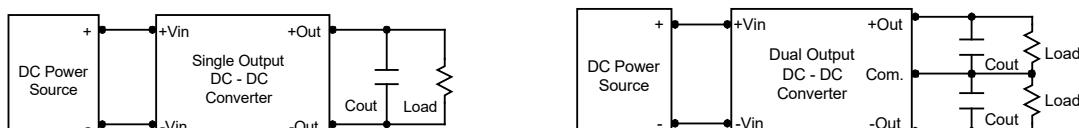

### Maximum Capacitive Load

The MIW2300 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 100°C.

The derating curves are determined from measurements obtained in a test setup.

