

Add: No.168, Mingjia Road, Shanghai 201107, P.R.China
Tel: +86 (0)21 52634688 Website: www.moons.com.cn

Rev.	Date	Contents	ECO NO.	DWG	CHK	APPR
A0	2016/11/14	New realease		Baoyu Shen	Feng He	Feng He



- **Features**
- Input voltage: 90-305Vac
 - Built-in active PFC function: 0.98 Typ
 - High efficiency: 93% Typ
 - Constant current/ 0-10V dimming/ clock dimming/ PWM dimming/Dim off
 - Full power at 65%I_{max}~100%I_{max} (constant power)
 - IP67 design for indoor or outdoor installations
 - High surge immunity
 - Compliance to worldwide safety regulations for lighting
 - Suitable for dry/damp locations
 - 5 Years Warranty

■ **Specification**

Model		105	150	210	300	420	600	720
(MU260HxxxAQ_CP)								
	Efficiency (230Vac)(Typ.) _{Note.1}	93.0%	93.0%	93.0%	93.0%	93.0%	93.0%	93.0%
	Voltage Range (V) _{Note.2}	90 ~ 305Vac, OR 127 ~ 430Vdc						
	Voltage Rated (V) _{Note.2}	120 ~ 277Vac						
	Frequency Range (Hz)	47~63						
	Power Factor	PF>0.98/120VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load						
	THD	THD< 20% when output loading ≥ 60% at 120VAC/230VAC input and output loading ≥ 80% at 277VAC input						
	AC Current (Max.)	2.7A MAX at 120Vac, 1.4A MAX at 230Vac						
	Inrush Current (Max.)	COLD START 75A(twidth=680μs measured at 50% I _{peak}) at 230VAC						
	MAX. No. of PSUs on 16A CIRCUIT BREAKER							
Output	Leakage Current (Max.)	0.75mA at 277Vac/60Hz						
	Rated Output Voltage (V)	371-248	260-173	186-124	130-87	93-62	65-43	54-36
	Output Voltage Range (V)	371-149	260-104	186-74	130-52	93-37	65-26	54-22
	Rated Current (mA)	700-1050	1000-1500	1400-2100	2000-3000	2800-4200	4000-6000	4800-7200
	Output Current Range (mA)	70-1050	100-1500	140-2100	200-3000	280-4200	400-6000	480-7200
	Rated Power (W)	260W						
	Output Current Setting Range	6.5%-100% of I _{o_max}						
	Constant Power Setting Range	65%-100% of P _{o_max}						
	Ripple Current (Typ.)	10% of I _{o_max} . ((PK-AV) /AV) with LED default mode and full load)						
	Current Tolerance	±5%						
	Line Regulation	±3%						
	Load Regulation	±3%						
	Turn on delay Time	<1s, at 120Vac; <0.5s, at 230Vac						
Dimming Control	12Vdc Output Voltage (Vdc)	10.8Vmin. ~ 12Vtyp. ~ 13.2Vmax.						
	12Vdc Output Current(Vdc)	0mA~50mA max.						
	0~10V/DIM+ Voltage	Absolute maximum voltage -10Vmin~20Vmax						
	0~10V/DIM+ Short Current	280uA~450uA (DIM(+)=0)						
	DIMMING FUNCTION	Default 0-10V dimming mode. Other dimming modes sets to PWM/Clock Dimming(CLK) by software configuration						
Protection	Over Voltage (V)(Typ.)	>426V	>300V	>214V	>150V	>107V	>75V	>63V
	Short Circuit	Protection type: Voltage limiting.output will not exceed the upper limit voltage , recovers automatically after fault condition is removed.						
	Over temperature	Protection type: Decreases output current,returning to normal after over temperature is removed.						
Environment	Operating Temp.	-40~+55°C(Refer to 'Derating Curve')						
	Tc	85°C max						
	Operating Humidity	20~95%RH						
	Storage Temp., Humidity	-40~+85°C , 10-95%RH						
	Temp. Coefficient	0.03%/°C (0~55°C)						
Safety & EMC	Vibration	10-500Hz, 5G 12min/cycle, period for 72min each along X、Y、Z axes						
	Safety Standard	UL8750, UL1012, CSA C22.2 NO.107.1, EN61347-1, EN61347-2-13						
	Withstand Voltage	I/P-O/P:3.75kVac, I/P-FG:1.875kVac, O/P-FG:1.5kVac						
	Isolation Resistance	I/P-O/P:100M Ohms (500VDC/25°C/70%RH)						
	EMC Emission	FCC Part 15 Class B/ EN55015, EN61000-3-2 Class C, EN61000-3-3						
Others	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547 (Surge: L-N: ±4kV, L,N-FG: ±6kV)						
	MTBF	TBD						
	Dimension	190*190*77.5						
	Weight (Typ.)	2.7Kg						

Note.1: Measured at full load and steady-state temperature in 25°C ambient(Efficiency will be about 2% lower if measured immediately after startup); Note. 2: Derating may be needed under low input voltage, Please Refer to 'Derating Curve' ;

subject to change without notice


Page 3 of 8

SHANGHAI MOONS' AUTOMATION CONTROL CO., LTD.

Add: No.168, Mingjia Road, Shanghai 201107, P.R.China


Tel: +86 (0)21 52634688 Website: www.moons.com.cn

Derating Curve

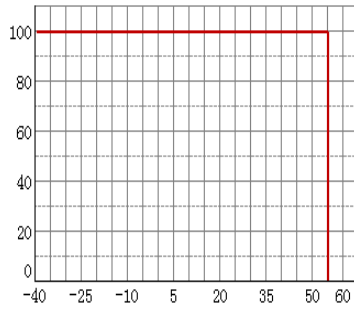


Ambient Temperature (°C)

V/I Curve

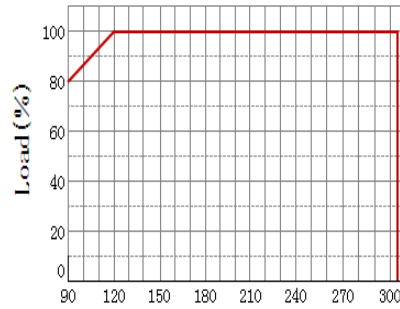


Input Voltage (V)


V/I Operating Area

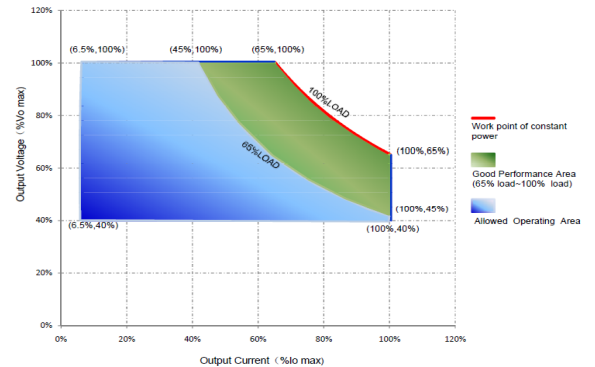


Power Factor VS. Load Curve

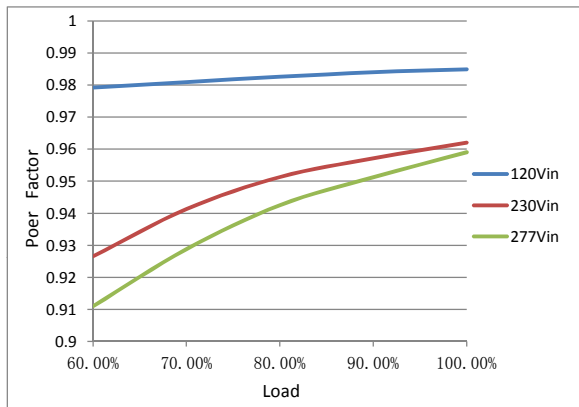


Efficiency VS. Load Curve

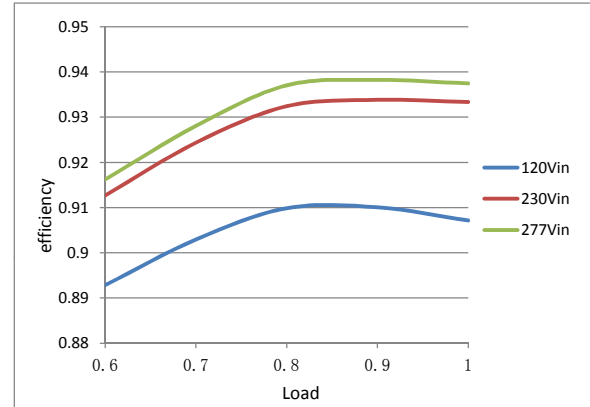

THD VS. Load Curve

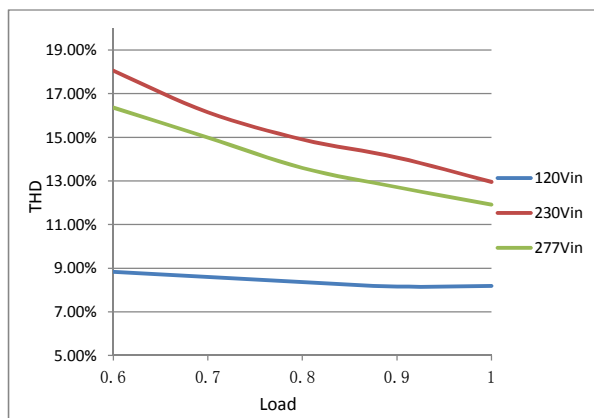


Life Time VS. Tcase (Ref.)

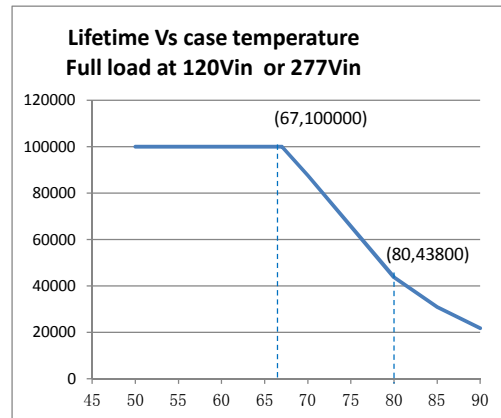

■ Instruction

1.Field Programmable Topology

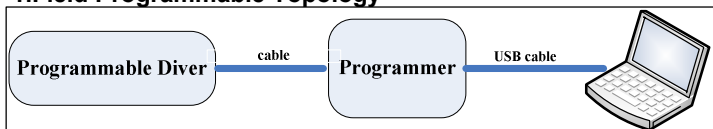


The programmable driver can be programmed by using special PC software and the programmer module.

2.Dimming Interface Description

Pin description

Pin	Name	Value	Description
1	Vaux 12V	10.8V-13.2V	Passive dimmers power supply
2	Dim+/Program	0-10V	Dimming/Programming input
3	Dim-	0V	DC Ground

CLKS DIMMING PROGRAMMING INTERFACE



3.Dimming Software Function Instruction

■ Adjustable Output Current(AOC)

Adjustable Output Current(AOC)

Module Current mA

Max Current mA Power W

Users can set the rated current between 7%*Max Current and 100%*Max Current

■ PWM

Input a PWM signal from the 2nd pin(Dim+/Program) of the dimming interface to change the output current. User can set "Positive Logic" or "Negative Logic" of the PWM signal. PWM duty circle: 1%~99%(it has both positive and negative logics), frequency: 500Hz~5kHz, 3V~10V is high, 0.3V~0.8V is low.

■ Adjustable Startup Time(AST)

Adjustable Startup Time(AST)

Start Fadeup Time s

Set driver's "Start Fade up Time". It means how much time the driver costs to achieve the "Module Current" that the user set. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

■ Fade Time(FT)


Fade Time(FT)

Fadeup Time s

Set driver's "Fade up Time". This function is available in the Smart Midnight ClockDIM and Fixed ClockDIM mode; It means how much time the driver costs to achieve another dimming level from previous dimming level. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

■ 1-10V

Allow users to set the max and min output current and corresponding output voltage to clarify the 1-10V dimming curve. Input a 0~10V signal from 2nd pin of the dimming interface. Default: input $\leq 1V$, output current 10%; input $\geq 8.5V$, output current 100%.

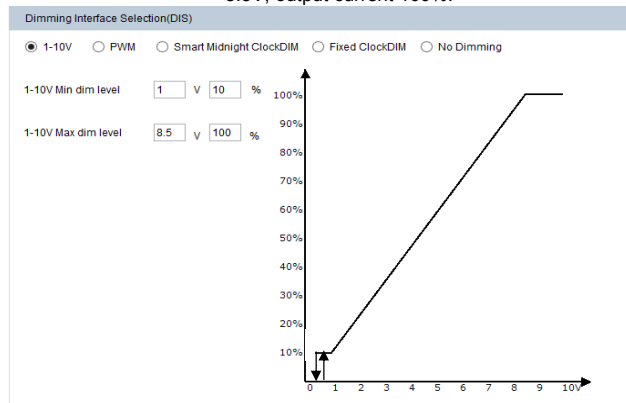


Dimming Interface Selection(DIS)

☐ 1-10V ☒ PWM ☐ Smart Midnight ClockDIM ☐ Fixed ClockDIM ☐ No Dimming


PWM Logic(PWML)

Positive Or Negative Logic

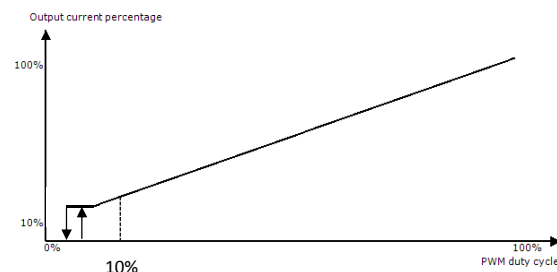



■ Instruction

■ SmartMidnight ClockDIM

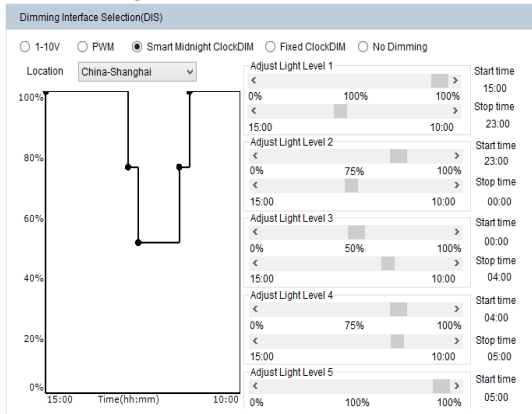


Smart Midnight ClockDIM allows dimming to predefined light levels based on the nightly operating time. With flexibility in setting time and light levels, the user can configure the driver for specific locations and application needs. Using Smart Midnight ClockDIM, it is possible to set up to 5 dim levels and time intervals. The driver does not have a real time clock. Instead it runs a virtual clock, determined by the length of nightly operating hours. After 3 ON-OFF cycles, the driver will calculate the virtual clock time. A valid ON-time is defined as a period during which the driver operates continuously for ≥ 4 hours to ≤ 24 hours. For example, if the requirement in summer is: 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75% (other time 100% or Off). The driver should be powered on for 7h, so it can calculate the virtual clock time as 22:00. Then we can set the dimming plan: 22:00~23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%. From summer to winter, the valid ON-time changes day by day. The driver should be powered on for 17h in winter, and it also can calculate the virtual clock time as 17:00. Then the dimming plan is 17:00~23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%, 05:00~10:00: 100%. From the above, if we set the dimming plan as shown in the picture, after repeating the driver ON-time for 3 consecutive days, the dimming plan takes effect from the 4th day onwards. Each day the driver powered on, it has a different start time according to the virtual clock time. So the driver can satisfy different requirements for different seasons.

■ Constant Light Output(CLO)

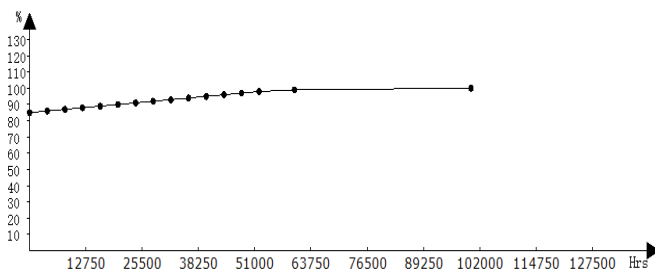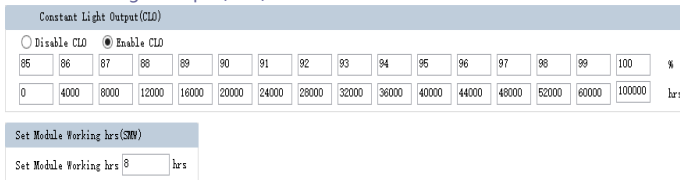

■ Fixed ClockDIM

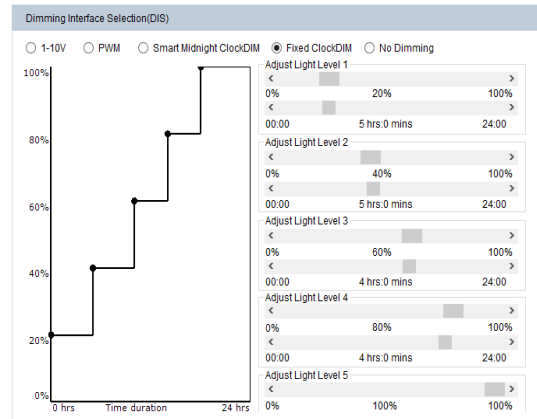


Allow users to separate 24hrs into 5 sections and corresponding output current.

■ No Dimming



The driver will be in constant output mode.

■ Set MODULE Working hrs(SMW)



User can check how much time the driver works through this function.


Traditional light sources suffer from depreciation in light output over time. This applies to LED light sources as well. The CLO feature enables LED solutions to deliver constant lumen output through the life of the light engine. Based on the type of LEDs used, heat sinking and driver current, it is possible to estimate the depreciation of light output for specific LEDs and this information can be entered into the driver. The driver counts the number of light source working hours and will increase output current based on this input to enable CLO. When the CLO feature is enabled, the driver nominal output current will be defined by the CLO percentage as shown by the equation below:

$$\text{Driver target nominal output current} = \text{CLO percentage} \times \text{AOC}$$

For example, in the CLO profile shown in Figure, between 52,000-60,000 working hours, the CLO percentage is set at 98%. Assuming the nominal AOC is set to 500mA, the driver output current with CLO enabled will be $0.98 \times 500 = 490$ mA. The CLO percentage can be set to a value between 85%-100%, in increments of 1%. The LED module working hours can be set at any value between (0-100,000 hours).

■ Mechanical Specification

Dimensions (Unit: mm)

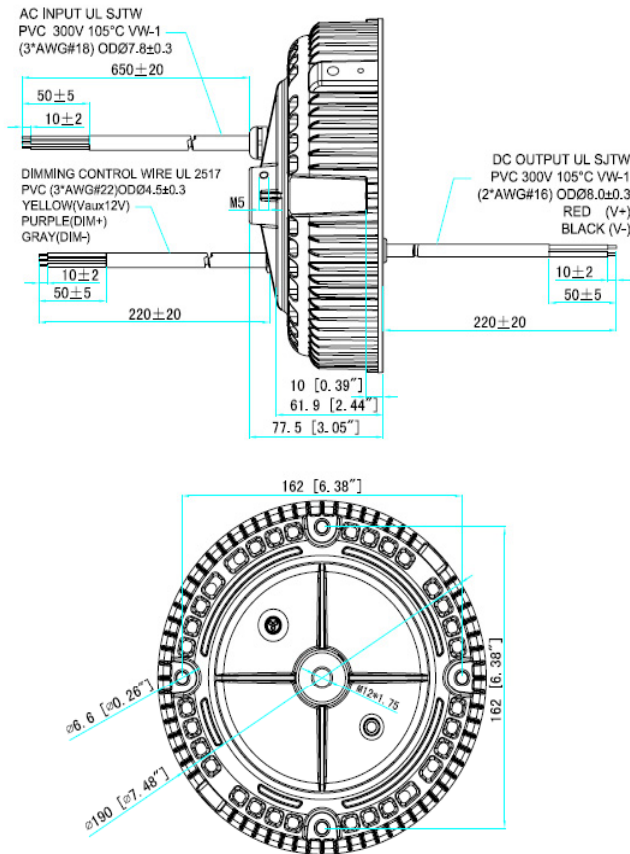

■ Label

TBD

RoHS Compliance:

Our products comply with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.