

MU260HxxxAQ1_CP

A0

DWG NO. : MSSD-

■ Features · Input voltage: 90-305Vac

- · Built-in active PFC function: 0.98 Typ.
 - · High efficiency: 93% Typ.
 - · Constant current/ 0-10V dimming/ clock dimming/ PWM dimming/Dim off
 - · Full power at 65%lomax~100%lomax (constant power)
 - · IP67 design for indoor or outdoor installations
 - · High surge immunity
 - · Compliance to worldwide safety regulations for lighting
 - · Suitable for dry/damp locations
 - · 5 Years Warranty

	Model	405	450	040	200	400		700	
(MU	J260HxxxAQ1_CP)	105	150	210	300	420	600	720	
	Efficiency (230Vac)(Typ.) _{Note.1}	93.0%	93.0%	93.0%	93.0%	93.0%	93.0%	93.0%	
	Voltage Range (V) _{Note.2}	90 ~ 305Vac, OR 127~ 430Vdc							
	Voltage Rated (V) _{Note.2}				120 ~ 277Vac				
	Frequency Range (Hz)	47~63 PF>0.98/120VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load THD< 20% when output loading ≧ 60% at 120VAC/230VAC input and output loading ≧ 80% at 277VAC input 2.7A MAX at 120Vac, 1.4A MAX at 230Vac COLD START 75A(twidth=680µs measured at 50% Ipeak) at 230VAC							
	Power Factor								
	THD								
	AC Current (Max.)								
	Inrush Current (Max.)								
	MAX. No. of PSUs on 16A CIRCUIT BREAKER								
	Leakage Current (Max.)		-	0.7	75mA at 277Vac/60	Hz			
	Rated Output Voltage (V)	371-248	260-173	186-124	130-87	93-62	65-43	54-36	
	Output Voltage Range (V)	371-149	260-104	186-74	130-52	93-37	65-26	54-22	
	Rated Current (mA)	700-1050	1000-1500	1400-2100	2000-3000	2800-4200	4000-6000	4800-7200	
	Output Current Range (mA)	70-1050	100-1500	140-2100	200-3000	280-4200	400-6000	480-7200	
	Rated Power (W)	260W							
Output	Output Current Setting Range	6.5%-100% of lo_max							
ouipui	Constant Power Setting Range	65%-100% of Po_max							
	Ripple Current (Typ.)	10% of Io_max. ((PK-AV) /AV) with LED default mode and full load)							
	Current Tolerance	±5%							
	Line Regulation	±3%							
	Load Regulation	±3%							
	Turn on delay Time	<1s, at 120Vac; <0.5s, at 230Vac							
	12Vdc Output Voltage (Vdc)	10.8Vmin.~12Vtyp.~13.2Vmax.							
Dimming	12Vdc Output Current(Vdc)	0mA~50mA max.							
Control	0~10V/DMI+ Voltage	Absolute maximum voltage -10Vmin~20Vmax							
	0~10V/DMI+ Short Current)uA~450uA (DIM(+				
	DIMMING FUNCTION	Default 0-10V dimming mode. Other dimming modes sets to PWM/Clock Dimming(CLK) by software configuration							
	Over Voltage (V)(Typ.)	>426V >300V >214V >150V >107V >75V							
		Protection type: Voltage limiting.output will not exceed the upper limit voltage, recovers automatically after fault condition is ren							
Protection	Short Circuit	Protection type: Hiccup mode. recovers automatically after short is removed.							
	Over temperature	Protection type: Decreases output current, returning to normal after over temperature is removed.							
	Operating Temp.	-40~+60°C(Refer to 'Derating Curve') (Option:-40~+65°C)							
	Tc	85°C max							
Environment	Operating Humidity	20~95%RH							
	Storage Temp., Humidity			-4	0~+85℃,10-95%	RH			
	Temp. Coefficient	0.03%/°C (0~60°C)							
	Vibration	10-500Hz, 5G 12min/cycle, period for 72min each along X、Y、Z axes							
	Safety Standard	UL8750, UL1012, CSA C22.2 NO.107.1, EN61347-1, EN61347-2-13							
Safety &	Withstand Voltage	I/P-O/P:3.75kVac, I/P-FG:1.875kVac, O/P-FG:1.5kVac							
EMC	Isolation Resistance	I/P-O/P:100M Ohms (500VDC/25°C/70%RH)							
-	EMC Emission	FCC Part 15 Class B/ EN55015, EN61000-3-2 Class C, EN61000-3-3							
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61547 (Surge: L-N: ±4kV, L,N-FG: ±6kV)							
	MTBF				TBD				
Others	Dimension	191*191*76.5							
	Weight (Typ.)	2.7Kg							

Note.1: Measured at full load and steady-state temperature in 25°C ambient(Efficiency will be about 2% lower if measured immediately after startup); Note. 2: Derating may be needed under low input voltage, Please Refer to 'Derating Curve';


subject to change without notice

Page 3 of 8


MU260HxxxAQ1_CP

General - Outdoor


DWG NO. : MSSD-A0

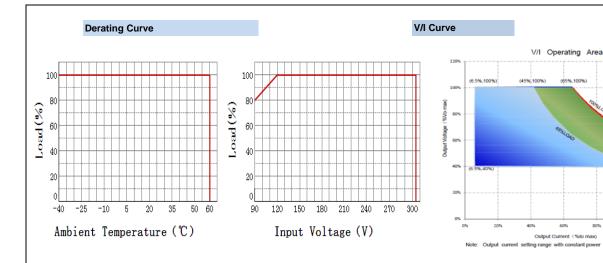



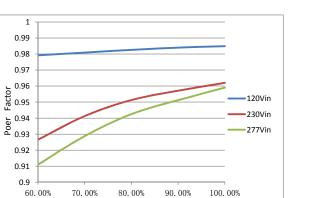

Efficiency VS. Load Curve

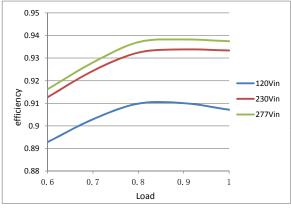


ant

THD VS. Load Curve

Power Factor VS. Load Curve


MOONS'

moving in better ways

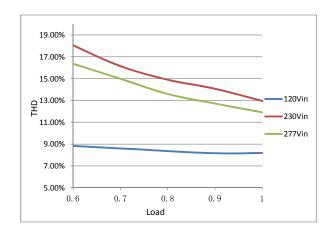

Load

Life Time VS. Tcase (Ref.)

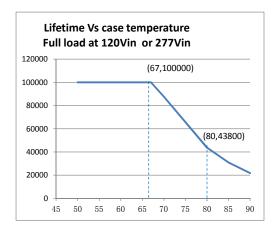

subject to change without notice

Page 5 of 8



MU260HxxxAQ1 CP

General - Outdoor

CLKS DIMMING PROGRAMMING INTERFACE Vaux 12V / YE(黄色)

Program [/]PU(紫色)

/ GR(灰色)

DWG NO · MSSD- A0

Instruction

1.Field Programmable Topology



The programmable driver can be programmed by using special PC software and the programmer module.

2. Dimming Interface Description

Pin Name		Value	Description		
1	Vaux 12V	10.8V-13.2V	Passive dimmers power supply		
2	Dim+/Program	0-10V	Dimming/Programming input		
3	Dim-	0V	DC Ground		

3.Dimming Software Function Instruction





Users can set the rated current between 7%*Max Current and 100%*Max Current

PWM

Input a PWM signal from the 2nd pin(Dim+/Program) of the dimming interface to change the output current. User can set "Positive Logic" or ' Negative Logic" of the PWM signal. PWM duty circle: 1%~99%(it has both positive and negative logics), frequency: 500Hz~5kHz, 3V~10V is high,-0.3V~0.8V is low.

Dim+

Dim-

Adjustable Startup Time(AST)

Adjustable Startup Time(AST)	
Start Fadeup Time 5 💌	s

Set driver's "Start Fade up Time". It means how much time the driver costs to achieve the "Module Current that the user set. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

Set driver's "Fade up Time". This

function is available in the Smart

ClockDIM mode; It means how much time the driver costs to achieve another dimming level from previous dimming level. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

Midnight ClockDIM and Fixed


Fade Time(FT)

Fade Time(FT)


Fadeup	Time	1	~	s

■ 1-10V

Allow users to set the max and min output current and corresponding output voltage to clarify the 1-10V dimming curve. Input a 0~10V signal from 2nd pin of the dimming interface. Default: input \leq 1V, output current 10%; input \geq 8.5V, output current 100%.

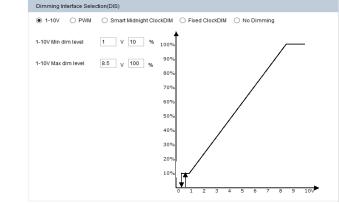

subject to change without notice

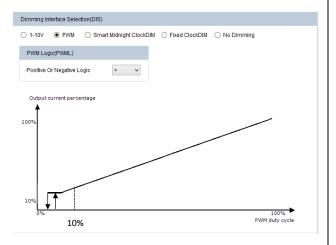




SHANGHAI MOONS' AUTOMATION CONTROL CO., LTD. Add: No.168, Mingjia Road, Shanghai 201107, P.R.China Tel: +86 (0)21 52634688 Website: www.moons.com.cn




General - Outdoor

Instruction


SmartMidnight ClockDIM

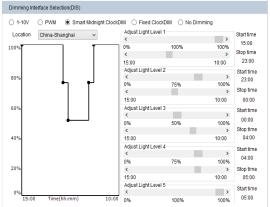

Smart Midnight ClockDIM allows dimming to predefined light levels based on the nightly operating time. With flexibility in setting time and light levels, the user can configure the driver for specific locations and application needs. Using Smart Midnight ClockDIM, it is possible to set up to 5 dim levels and time intervals. The driver does not have a real time clock. Instead it runs a virtual clock, determined by the length of nightly operating hours. After 3 ON-OFF cycles, the driver will calculate the virtual clock time. A valid ONtime is defined as a period during which the driver operates continuously for ≥ 4 hours to ≤ 24 hours. For example, if the requirement in summer is: 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75% (other time 100% or Off). The driver should be powered on for 7h, so it can calculate the virtual clock time as 22:00. Then we can set the dimming plan: 22:00~23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%. From summer to winter, the valid ON-time changes day by day. The driver should be powered on for 17h in winter, and it also can calculate the virtual clock time as 17:00. Then the dimming plan is 17:00~23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%, 05:00~10:00: 100%. From the above, if we set the dimming plan as shown in the picture, after repeating the driver ON-time for 3 consecutive days, the dimming plan takes effect from the 4th day onwards. Each day the driver powered on, it has a different start time according to the virtual clock time. So the driver can satisfy different requirements for different seasons.

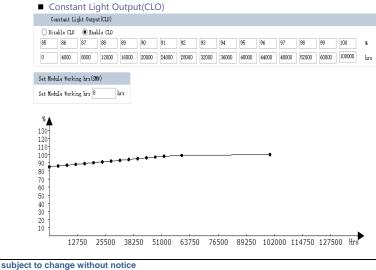

Fixed ClockDIM

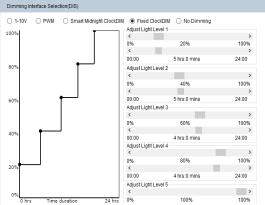

Allow users to separate 24hrs into 5 sections and corresponding output current.

No Dimming Dimming Interface Selection(DIS)

○ 1-10V ○ PWM ○ Smart Midnight ClockDIM ○ Fixed ClockDIM ● No Dimming

The driver will be in constant output mode.

Set MODULE Working hrs(SMW)

Set	Module	Working	hrs(SMW)	

Set	Module	Working	hrs	10	hr s
-----	--------	---------	-----	----	------

User can check how much time the driver works through this function.

Traditional light sources suffer from depreciation in light output over time. This applies to LED light sources as well. The CLO feature enables LED solutions to deliver constant lumen output through the life of the light engine. Based on the type of LEDs used, heat sinking and driver current, it is possible to estimate the depreciation of light output for specific LEDs and this information can be entered into the driver. The driver counts the number of light source working hours and will increase output current based on this input to enable CLO. When the CLO feature is enabled, the driver nominal output current will be defined by the CLO percentage as shown by the equation below: Driver target nominal output current = CLO percentage * AOC. For example, in the CLO profile shown in Figure, between 52,000-60,000 working hours, the CLO percentage is set at 98%. Assuming the nominal AOC is set to 500mA, the driver output current with CLO enabled will be 0.98 x 500 = 600 mA. The CLO percentage can be set to a value between 85%-100%, in increments of 1%. The LED module working hours can be set at any value between (0-100.000 hours).

Page 7 of 8

SHANGHAI MOONS' AUTOMATION CONTROL CO., LTD. Add: No.168, Mingjia Road, Shanghai 201107, P.R.China

Tel: +86 (0)21 52634688 Website: www.moons.com.cn




General - Outdoor

DWG NO. : MSSD-



Page 8 of 8

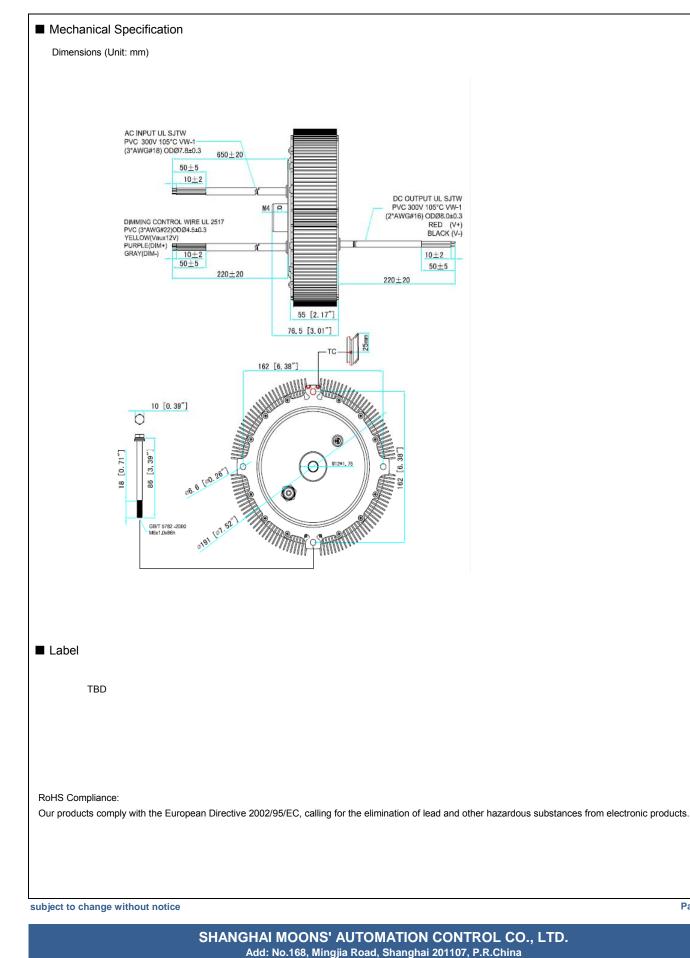

Tel: +86 (0)21 52634688 Website: www.moons.com.cn