



## FEATURES

- Universal 85 - 264VAC or 120 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -25°C to +70°C
- Efficiency up to 88%
- High I/O isolation voltage up to 4000VAC
- DC OK function
- Operating altitude up to 5000m
- Output short circuit, over-current, over-voltage protection
- DIN rail TS35X7.5/ TS35X15 mountable
- Design refer to UL/IEC62368, UL61010, UL508

LI60-20BxxPU series is Mornsun AC-DC converter series featuring a cost-effective, energy efficient green power supply solution for standard DIN-rail mounting. The products offer a high level of stability and immunity to noise for industrial control equipment, machinery, and other industrial equipment in a variety of harsh environments. These light weight AC-DC converters have an extremely compact design and the standard rail installation for space saving. With good EMC performance, design refer to international UL/EN/IEC/BS EN62368, UL61010, UL508 standards for EMC and safety.

## Selection Guide

Certification	Part No.	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range ADJ (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
EN	LI60-20B05PU	50	5V/10A	5-6	83	12000
	LI60-20B12PU	60	12V/5A	12-15	87	6000
	LI60-20B24PU	60	24V/2.5A	24-30	88	1500
	LI60-20B48PU	60	48V/1.25A	48-56	88	680

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		85	--	264	VAC
	DC input		120	--	370	VDC
Input Voltage Frequency	AC input		47	--	63	Hz
Input Current	115VAC		--	--	1.8	A
	230VAC		--	--	1.0	
Inrush Current	115VAC		--	30	--	
	230VAC		--	60	--	
Leakage Current	240VAC		<0.5mA			
Hot Plug			Unavailable			

## Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	--	±2	--	%
		12V/24V/48V	--	±1	--	
Line Regulation	Rated load		--	±1	--	
Load Regulation	230VAC	5V	--	±1.5	--	
		12V/24V/48V	--	±1	--	
Minimum Load			0	--	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	5V	--	80	100	mV
		12V	--	100	120	
		24V	--	120	150	
		48V	--	150	200	

Temperature Coefficient		--	±0.03	--	%/°C
Hold-up Time	115VAC	--	20	--	ms
	230VAC	--	60	--	
DC OK Signal**	Resistive load	30VDC/1A Max.			
Over-current Protection		≥110% Io, constant current mode, self-recover			
Short Circuit Protection		Constant current mode, recovers automatically after fault condition is removed			
Over-voltage Protection	5V	≤7.5V	Output voltage hiccup, self-recover		
	12V	≤18V			
	24V	≤36V			
	48V	≤64.8V			

Note: \*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information;

\*\*DC OK Signal: When the output voltage is normal, the relay is connected. When the output voltage is abnormal (<90%Vo), the relay is disconnected.

## General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - output	Electric strength test for 1min., leakage current <10mA	4000	--	--	VAC
	Input - ⊕		2000	--	--	
	Output - ⊕		500	--	--	
Insulation Resistance	Input - output	Test voltage: 500VDC	50	--	--	MΩ
	Input - ⊕					
	Output - ⊕					
Operating Temperature		-25	--	+70	°C	
Storage Temperature		-40	--	+85		
Storage Humidity	Non-condensing	10	--	95	%RH	
Operating Humidity		20	--	95		
Power Derating	Operating temperature derating	5V	+45°C to +70°C	2	--	% / °C
		12V/24V/48V	+55°C to +70°C	2.67	--	
	Input voltage derating	85VAC-100VAC	1.33	--	--	%/VAC
Switching Frequency	230VAC, 100% load	--	65	--	kHz	
Safety Standard		EN62368-1, BS EN 62368-1 (Report); Design refer to UL/IEC62368-1, UL61010-1, UL508				
Safety Class		CLASS I				
MTBF	MIL-HDBK-217F@25°C	≥300,000 h				

## Mechanical Specifications



Case Material	Plastic, heat-resistant (UL94V-0)
Dimensions	100.00 x 36.50 x 90.00mm
Weight	230g (Typ.)
Cooling Method	Free air convection

## Electromagnetic Compatibility (EMC)



Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A

EFT	IEC/EN61000-4-4	±2KV	Perf. Criteria A
Surge	IEC/EN61000-4-5	Line to line ±2KV/line to PE ±4KV	Perf. Criteria A
CS	IEC/EN61000-4-6	10Vr.m.s	Perf. Criteria A
PFMF	IEC/EN61000-4-8	30A/m	Perf. Criteria A
Voltage dips, short interruption and voltage variations	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods (50Hz), 30 periods (60Hz)	Perf. Criteria B



### Product Characteristic Curve

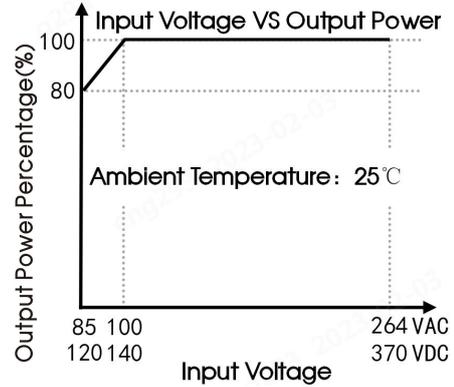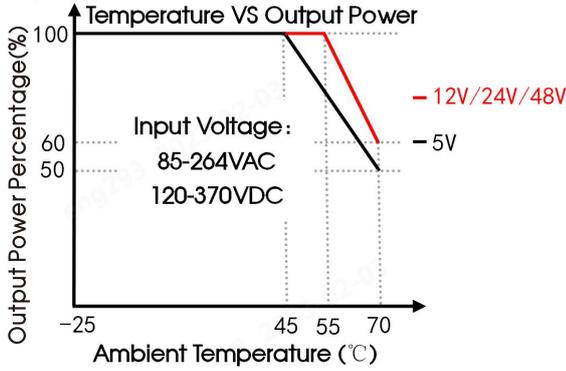


Note: 1. With an AC input voltage between 85-100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;  
 2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

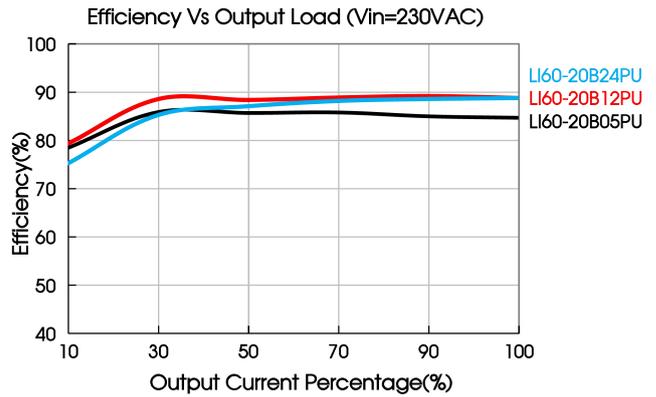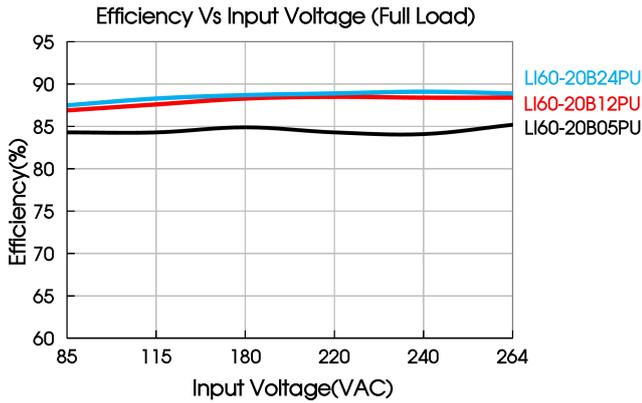

### Installation Diagram

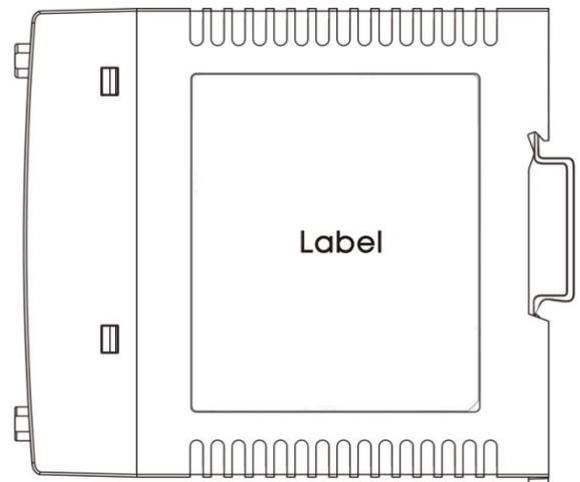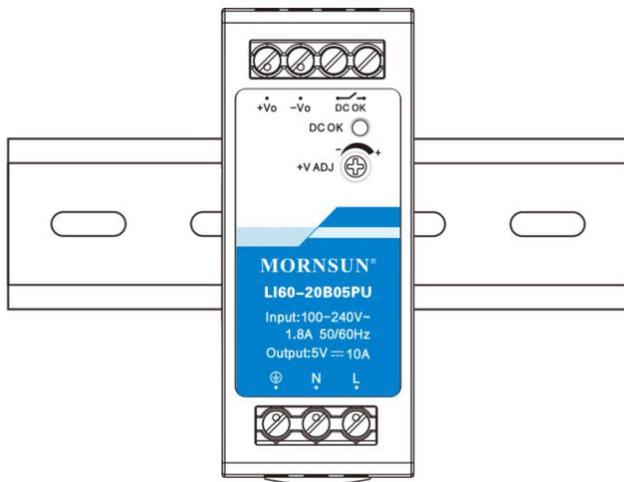


Materials required in the installation		
1	Product	1PCS
2	Slotted screwdriver	1PCS
3	TS35/7.5 or TS35/15	1PCS
4	26-10AWG Wire	/ PCS
5	The content is for reference only. Regarding the actual wire diameter and tightening torque, refer to the dimensional drawing.	



Product



Slotted screwdriver  
Diameter : 3mm




TS35/7.5 or TS35/15




### Installation steps ①-②

① Clamp the buckle of the product into the TS35 DIN rail.

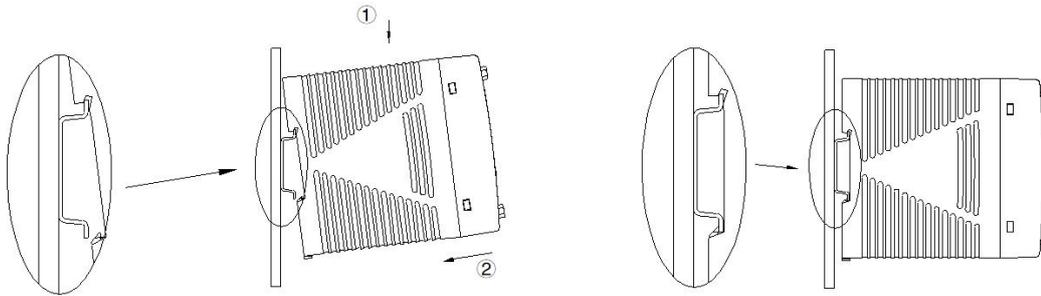


② Push the product vertically towards the TS35 DIN rail until hearing the sound of the buckle snapping into it.

### Disassembly Steps ③-④

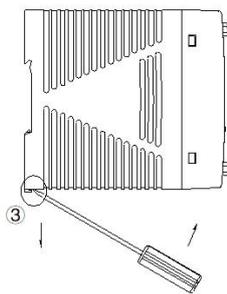

③ After inserting the slotted screwdriver into the square groove at the bottom of the buckle, push the slider of the buckle downward in the direction shown in the figure.


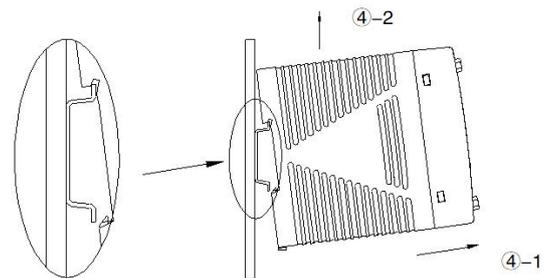


④ Hold the bottom of the product and push it outwards while pushing down the slider, then lift the product up to take the product out of the DIN rail.

Note: Keep the following installation clearances: 20mm on top, 20mm on the bottom, 5mm on the left and right sides are recommended when the device is loaded permanently with more than 50% of the rated power. Increase this clearance to 15mm in case the adjacent device is a heat source (e.g. another power supply).

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

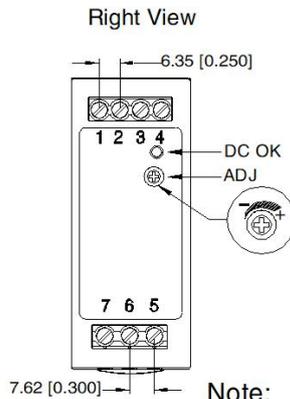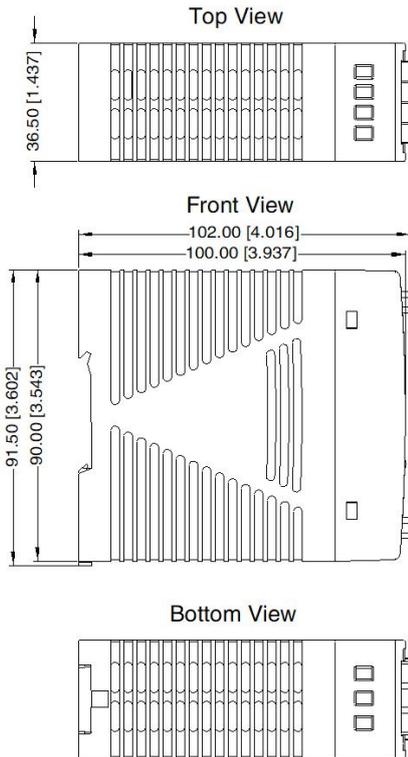

Pin-Out	
Pin	Mark
1	+Vo
2	-Vo
3	DC OK
4	
5	AC(L)
6	AC(N)
7	

Note:

Unit: mm[inch]

DC ON: Output status indicator LED  
ADJ: adjustable resistance to change output voltage

Wire range Input: 26-10 AWG ( 14-10AWG for pin7 )

Output: 5V: 14-10AWG

12V: 18-14AWG

24V、48V: 20-18AWG

Tightening torque: M3, Max 0.4 N · m

Mounting rail: TS35

General tolerances: ± 1.00[ ± 0.039]

Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220618;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity <75% RH with nominal input voltage and rated output load;
- The room temperature derating of 3.5°C/1000m is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The output voltage can be adjusted by the ADJ, clockwise to increase;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com