


AMESP500U-277JZ

Click to
ORDER
samples

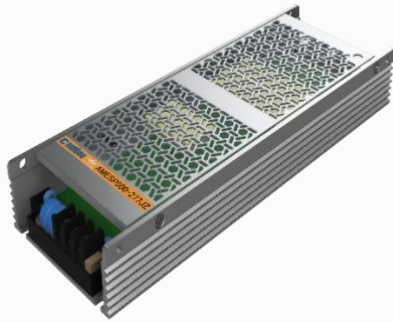

Enclosed

The AMESP500U-277JZ series is an efficient, enclosed, fan less, ultra-narrow, and semi-potted 500W AC/DC power supply module. It offers a wide commercial input voltage range of 85-305VAC, output voltage ranges from 5-55V, low power consumption, high efficiency, high reliability, and safer isolation.

This new series offers great operating temperatures, from -40°C to +85°C with full power up to 50°C and features an isolation of 4000VAC with improved reliability and system safety. Additionally, it has operating altitude of 5000m. Furthermore, a high MTBF of 200,000h, output short circuit protection (OSCP), output over-current protection (OCP), output over-voltage protection (OVP) and an over-temperature protection (OTP) come standard with the series.


The AMESP500U-277JZ is suitable for street lighting controls, grid power, instrumentation, industrial controls, communication, and civil applications.

Features

- Universal Input: 85 - 305VAC/120 - 430VDC
- Operating Temp: -40°C to +85°C
- High isolation voltage: 4000VAC
- Active PFC
- Output short circuit, over-current, over-voltage, over temperature protection
- Efficiency up to 95%
- 150% peak load output for 1 second
- Operating altitude up to 5000m
- Certified : EN/BS EN 62368-1
- Designed to meet : UL 62368-1, EN 60335-1, EN 61558-1, GB4943.1 standards

Summary

AMESP500U-277JZ

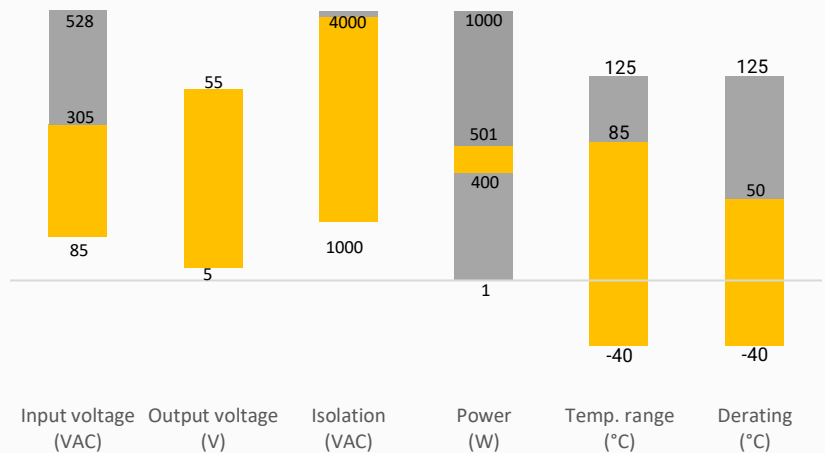

Training



Product Training Video



Press Release

Coming Soon!

Application Notes

Applications



Power Grid



Industrial



Telecom

Models & Specifications

Single Output

Model	Input Voltage (VAC)	Input Voltage (VDC)	Max Output wattage (W)	Nominal Output Voltage/Current (Vo/Io)	Output Voltage Adjustable Range(V)	Max Capacitive Load at Room temp (μF)	Max Capacitive Load at Low temp (μF)	Efficiency @ 230VAC Typ. (%)
AMESP500U-5S277JZ	85-305	120-430	400	5/80	4.5-5.5	12000	6000	90
AMESP500U-12S277JZ	85-305	120-430	500.4	12/41.7	11.4-12.6	10000	4000	94
AMESP500U-24S277JZ	85-305	120-430	501.6	24/20.9	22.8-25.2	8000	3000	94.5
AMESP500U-36S277JZ	85-305	120-430	500.4	36/13.9	34.2-37.8	6000	2000	95
AMESP500U-48S277JZ	85-305	120-430	501.6	48/10.45	45.6-50.4	4000	1000	95
AMESP500U-55S277JZ	85-305	120-430	489.5	55/8.9	45.0-58.0	2000	600	95

Input Specifications

Parameters	Conditions	Typical	Minimum	Maximum	Units
Input current	115VAC			6	A
	230VAC			3	A
Inrush current	Cold Start, 115VAC	30			A
	Cold Start, 230VAC	60			A
Leakage	277VAC			0.75	mA RMS
Input Frequency			47	63	Hz
Power Factor	Full Load, 115VAC	0.98			
	Full Load, 230VAC	0.95			
Input Voltage Range	AC Input		85	305	VAC
	DC Input		120	430	VDC
Hot Plug	Unavailable				

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	Full Load, 5V	±2		%
	Full Load, 12V/24V/36V/48V/55V	±1		%
Line regulation	Rated Load, 5V	±0.5		%
	Rated Load, 12V/24V/36V/48V/55V	±0.3		%
Load Regulation	0%-100% load, 5V	±1.0		%
	0%-100% load, 12V/24V/36V/48V/55V	±0.5		%
Ripple & Noise*	20MHz bandwidth (peak to peak value)		200	mV p-p
Hold up time	115VAC	12		ms
	230VAC	12		ms

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47μF electrolytic capacitor and 0.1μF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

Isolation Specification				
Parameters	Conditions	Minimum	Maximum	Units
Tested Input-GND	60 sec, leakage $\leq$ 10mA	2000		VAC
Tested I/O voltage		4000		VAC
Tested Output-GND voltage		1500		VAC
Resistance	Environment temperature: $25 \pm 5^{\circ}\text{C}$ Relative humidity: $<95\%\text{RH}$, non-condensing Testing Voltage: 500VDC	50		M Ω

General Specifications					
Parameters	Conditions	Typical	Minimum	Maximum	Units
Safety class	Class I				
Over current protection	hiccup, Auto recovery	≥ 110			% of Iout
Over voltage protection	5V output, output voltage turns off, re-power on for recover		5.75	6.75	VDC
	12V output, output voltage turns off, re-power on for recover		13.2	15.6	VDC
	24V output, output voltage turns off, re-power on for recover		26.4	31.2	VDC
	36V output, output voltage turns off, re-power on for recover		39.6	46.8	VDC
	48V output, output voltage turns off, re-power on for recover		52.8	60.0	VDC
	55V output, output voltage turns off, re-power on for recover		60.0	69.0	VDC
Over temperature protection	Output voltage turn off, self-recovery after the temperature drops				
Short circuit protection	Hiccup, continuous, auto-recover, Recovery time < 5 sec after short circuit disappear				
Operating temperature	See derating graph		-40	+85	°C
Storage temperature			-40	+85	°C
Power Derating	40 °C to 85 °C, 5V output with aluminum plate		1.667		%/°C
	45 °C to 85 °C, 12V output with aluminum plate		2		%/°C
	50 °C to 85 °C, 24V/36V/48V/55V output with aluminum plate		2.5		%/°C
	40 °C to 85 °C, 110VAC, 5V output (derating from 70% load) without aluminum plate		1		%/°C
	50 °C to 85 °C, 110VAC, 12V/24V/36V/48V/55V output (derating from 70% load) without aluminum plate		1.5		%/°C
	40 °C to 50 °C, 230VAC, 5V output (derating from 80% load) without heat sink plate		1		%/°C
	50 °C to 85 °C, 230VAC, 5V output (derating from 80% load) without heat sink plate		1.5		%/°C
	40 °C to 85 °C, 230VAC, 12V output (derating from 90% load) without heat sink plate		1.33		%/°C
	45 °C to 85 °C, 230VAC, 24V/36V/48V/55V output (derating from 90% load) without heat sink plate		1.6		%/°C
	85VAC ~ 110VAC input voltage		1		%/VAC
Cooling	Free air convection				
Humidity	Non-condensing		10	95	% RH
Case material	Metal (AL6063, SGCC)				
Weight		985			g
Dimensions (L x W x H)	9.13 x 3.19 x 1.22 inches (232.00 x 81.00 x 31.00 mm)				
MTBF	> 200,000 hrs (MIL-HDBK - 217F, t=+25°C)				
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.					


Safety Specifications

Parameters




Agency approvals	EN/BS EN62368-1	
Standards	Information technology Equipment	Design to meet UL62368-1
	EMC - Conducted and radiated emission	CISPR32 / EN55032, class B
	Harmonic Current	IEC/EN61000-3-2 CLASS A/D
	Voltage Flicker	IEC/EN6100-3-3
	Electrostatic Discharge Immunity	IEC/EN61000-4-2 Contact $\pm 8\text{KV}$, Air $\pm 15\text{KV}$, Criteria A
	RF, Electromagnetic Field Immunity	Input port IEC/EN 61000-4-3 10V/m, Criteria A
		Output port EN61000-6-2 10Vr.m.s
	Electrical Fast Transient/Burst Immunity	Input port IEC/EN 61000-4-4 $\pm 2\text{KV}$, Criteria A
		Output port EN61000-6-2 $\pm 2\text{KV}$
	Surge Immunity	Input port IEC/EN 61000-4-5 L-L $\pm 2\text{KV}$, L-GND $\pm 4\text{KV}$, Criteria A
		Output port EN61000-6-2, L-L $\pm 0.5\text{KV}$, L-GND $\pm 1\text{KV}$, Criteria A
	RF, Conducted Disturbance Immunity	Input port IEC/EN 61000-4-6, 10 Vr.m.s, Criteria A
	Intercom Interference Test	MS-SOP-DQC-007, Criteria B
	Power Frequency Magnetic Field	IEC/EN61000-4-11, 30A/m, Criteria A
	Voltage dips, Short Interruptions Immunity	IEC/EN 61000-4-11 0%, 70%, Criteria B

Derating

Thermal Derating with Aluminum Plate

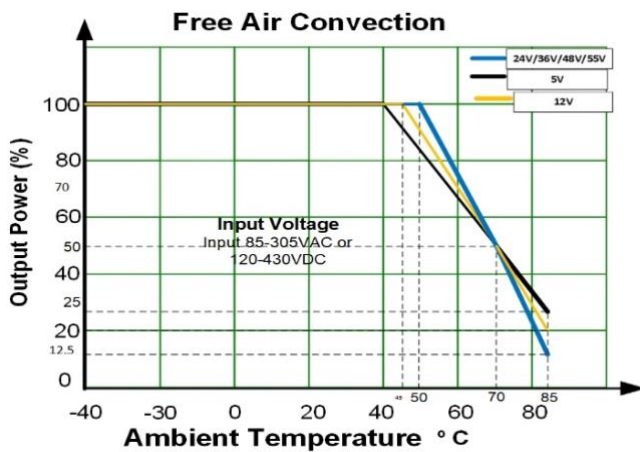


Without Aluminum Plate

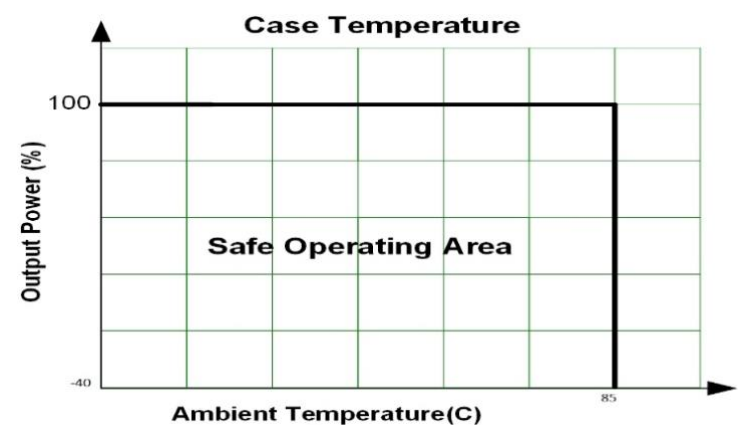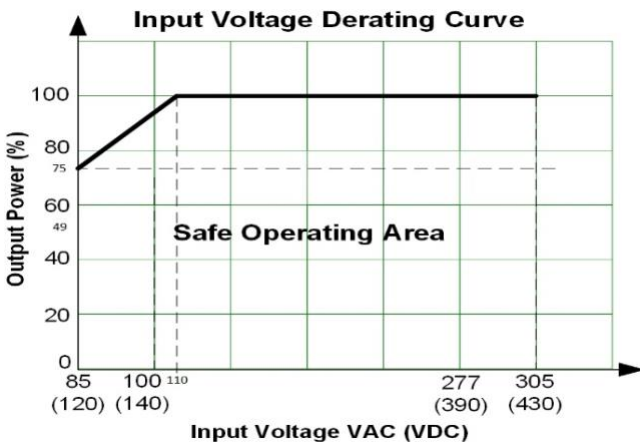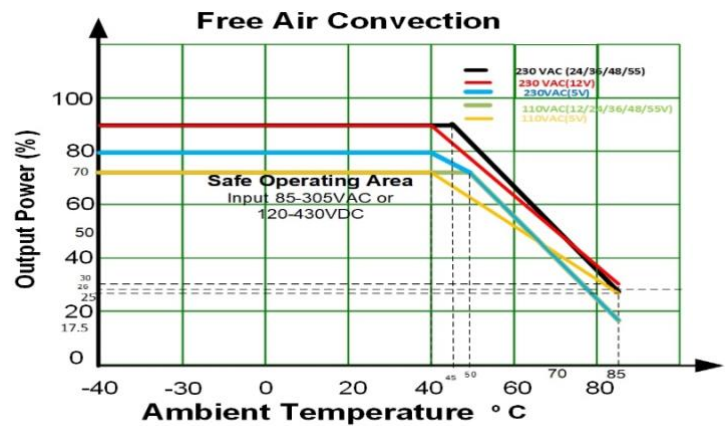


Efficiency vs input voltage




Efficiency vs Input Voltage (Full Load)

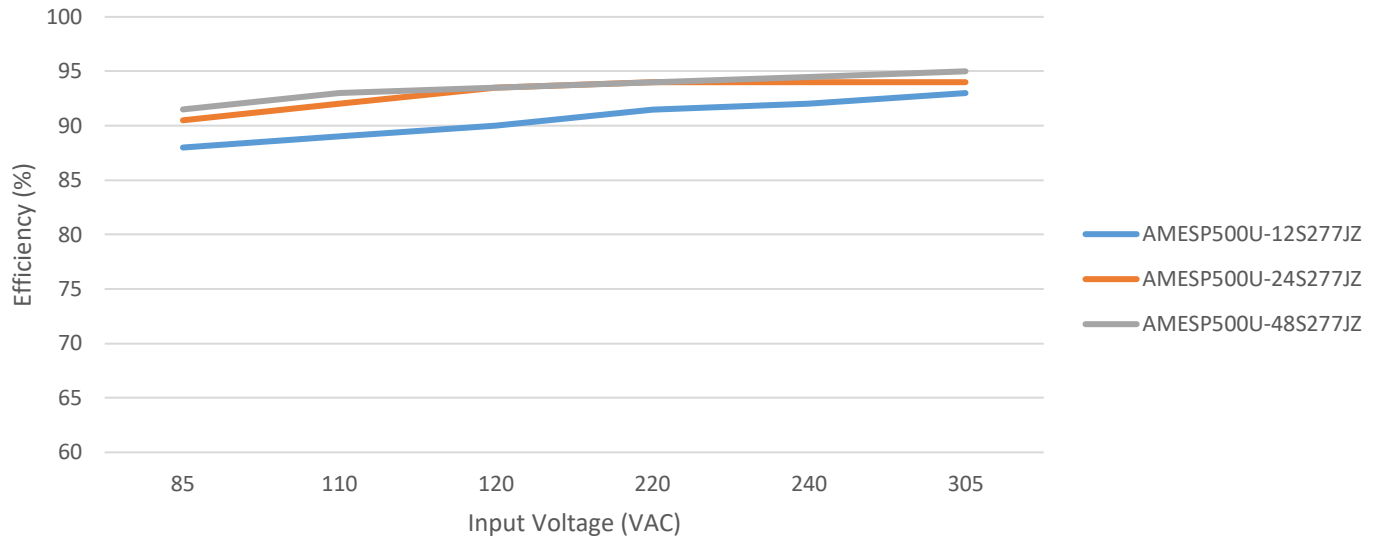

Efficiency vs Output Load (Vin=230VAC)

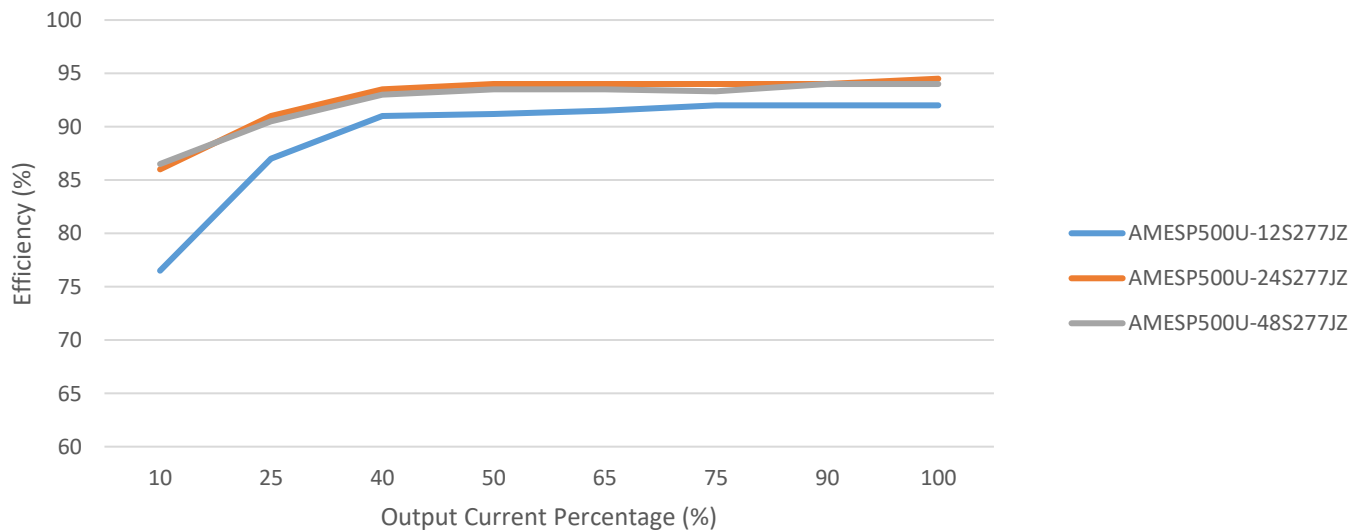

Dimensions

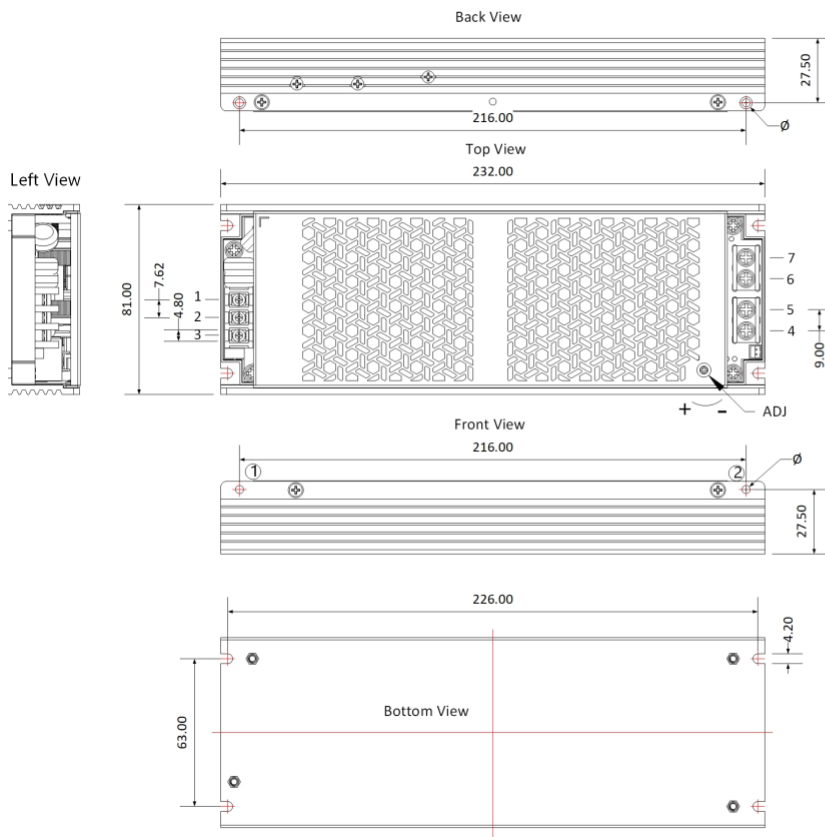


THIRD ANGLE PROJECTION



Pin-Out	
Pin	Mark
1	$\oplus$
2	AC(N)
3	AC(L)
4	+Vo
5	+Vo
6	-Vo
7	-Vo

Position	Installation Method	Screw Spec.	L	Torque(max)
① - ②	Screw Out	M3	Min 10mm	0.4N-m
	Screw Itself	M3	Max 8mm	0.4N-m

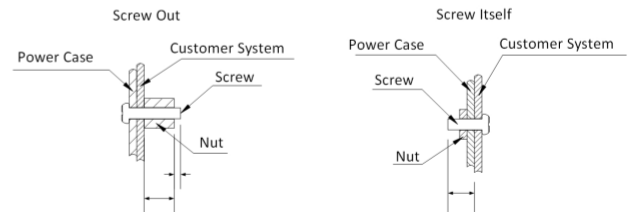

Note:

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: 22-14AWG

Tightening torque: M3, Max 0.5N-m

General tolerances: $\pm 1.00[\pm 0.039]$

Note:

- That is a schematic diagram of side installation, install with M3×6 combination screws, derating refer to without aluminum plate curve.
- That is the schematic diagram of the bottom installation, install with M3×4 round head screws, it is necessary to apply thermal grease on the bottom of the product, derating refer to with aluminum plate curve.

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.