

# Datasheet SHTC3

## Humidity and Temperature Sensor IC

- Ultra-low power consumption
- Full battery supply voltage range (1.62 - 3.6 V)
- Small DFN package:  $2 \times 2 \times 0.75 \text{ mm}^3$
- Typical accuracy:  $\pm 2 \% \text{RH}$  and  $\pm 0.2 ^\circ \text{C}$
- Fully calibrated and reflow solderable
- Power-up and measurement within 1 ms
- NIST traceability



### Product Summary

The SHTC3 is a digital humidity and temperature sensor designed especially for battery-driven high-volume consumer electronics applications. This sensor is strictly designed to overcome conventional limits for size, power consumption, and performance to price ratio in order to fulfill current and future requirements. Sensirion's CMOSens® technology offers a complete sensor system on a single chip, consisting of a capacitive humidity sensor, a bandgap temperature sensor, analog and digital signal processing, A/D converter, calibration data memory, and a digital communication interface supporting I<sup>2</sup>C Fast Mode Plus. The small  $2 \times 2 \times 0.75 \text{ mm}^3$  DFN package enables applications in even the most limited of spaces.

The sensor covers a humidity measurement range of 0 to 100 %RH and a temperature measurement range of -40 °C to 125 °C with a typical accuracy of  $\pm 2 \% \text{RH}$  and  $\pm 0.2 ^\circ \text{C}$ . The broad supply voltage of 1.62 V to 3.6 V and an energy budget below 1  $\mu \text{J}$  per measurement make the SHTC3 suitable for mobile or wireless applications powered by batteries. With the industry-proven quality and reliability of Sensirion's humidity and temperature sensors and constant accuracy over a large measurement range, the SHTC3 offers best performance-to-price ratio. Tape and reel packaging together with suitability for standard SMD assembly processes make the SHTC3 predestined for high-volume applications.


### Benefits of Sensirion's CMOSens® Technology

- High reliability and long-term stability
- Industry-proven technology with a track record of more than 15 years
- Designed for mass production
- Optimized for lowest cost
- High signal-to-noise ratio

### Contents of this Data Sheet

|    |                                                      |    |
|----|------------------------------------------------------|----|
| 1  | Humidity and Temperature Sensor Specifications ..... | 2  |
| 2  | Electrical Specifications .....                      | 3  |
| 3  | Timing Specifications .....                          | 4  |
| 4  | Interface Specifications .....                       | 6  |
| 5  | Operation and Communication .....                    | 6  |
| 6  | Quality .....                                        | 9  |
| 7  | Packaging and Traceability .....                     | 9  |
| 8  | Ordering Information .....                           | 9  |
| 9  | Technical Drawings .....                             | 10 |
| 10 | Further Information .....                            | 12 |

### Block diagram

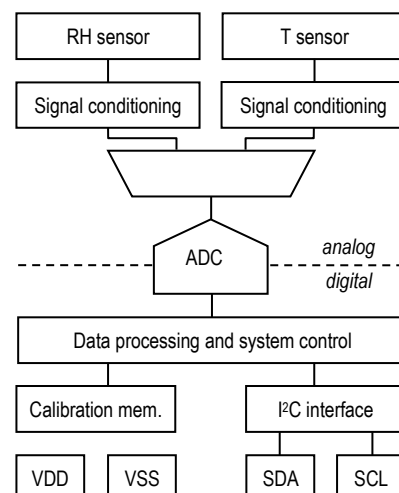

**Figure 1** Functional block diagram of the SHTC3.

# 1 Humidity and Temperature Sensor Specifications


Every SHTC3 is individually tested and calibrated and is identifiable by its unique serial number. The serial number is stored in an unchangeable OTP memory.

For the calibration, Sensirion uses transfer standards, which are subject to a scheduled calibration procedure. The calibration of the reference, used for the calibration of the transfer standards, is NIST traceable through an ISO/IEC 17025 accredited laboratory.

## Relative Humidity

| Parameter                       | Condition             | Value        | Unit  |
|---------------------------------|-----------------------|--------------|-------|
| Accuracy tolerance <sup>1</sup> | Typ.                  | ±2.0         | %RH   |
|                                 | Max.                  | see Figure 2 | %RH   |
| Repeatability <sup>2</sup>      | -                     | 0.1          | %RH   |
| Resolution <sup>3</sup>         | -                     | 0.01         | %RH   |
| Hysteresis                      | -                     | ±1           | %RH   |
| Specified range <sup>4</sup>    | extended <sup>5</sup> | 0 to 100     | %RH   |
| Response time <sup>6</sup>      | τ 63%                 | 8            | s     |
| Long-term drift <sup>7</sup>    | Typ.                  | <0.25        | %RH/y |

**Table 1** Humidity sensor specifications.

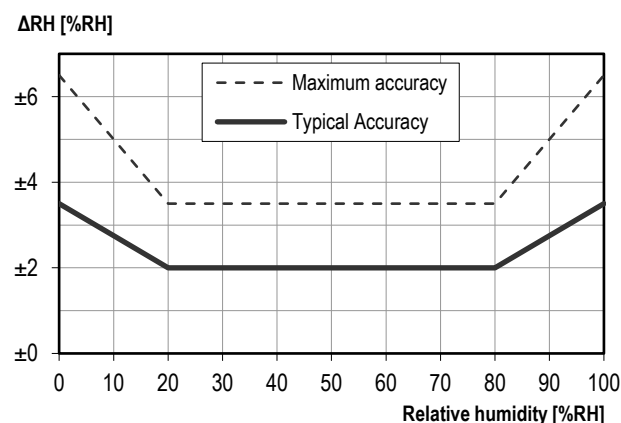


**Figure 2** Typical and maximal tolerance for relative humidity in %RH at 25 °C.

## Temperature

| Parameter                       | Condition | Value        | Unit |
|---------------------------------|-----------|--------------|------|
| Accuracy tolerance <sup>1</sup> | Typ.      | ±0.2         | °C   |
|                                 | Max.      | see Figure 3 | °C   |
| Repeatability <sup>2</sup>      | -         | 0.1          | °C   |
| Resolution <sup>3</sup>         | -         | 0.01         | °C   |
| Specified range <sup>4</sup>    | -         | -40 to +125  | °C   |
| Response time <sup>8</sup>      | τ 63%     | <5 to 30     | s    |
| Long-term drift <sup>9</sup>    | Typ.      | <0.02        | °C/y |

**Table 2** Temperature sensor specifications.

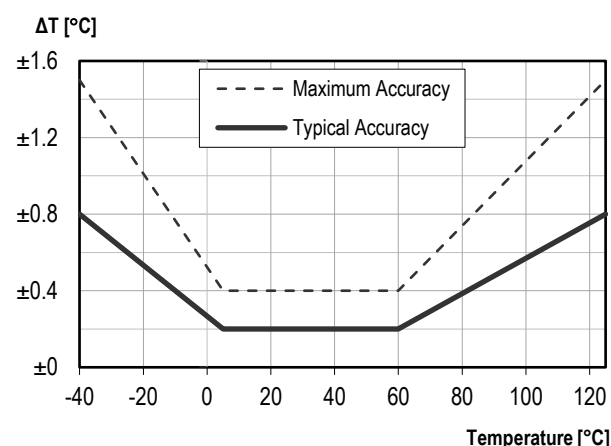

**Figure 3** Typical and maximal tolerance for temperature sensor in °C.

<sup>1</sup> For definition of typ. and max. accuracy tolerance, please refer to the document "Sensirion Humidity Sensor Specification Statement". Specification applies to normal mode.

<sup>2</sup> The stated repeatability is 3 times the standard deviation (3σ) of multiple consecutive measurement values at constant conditions and is a measure for the noise on the physical sensor output. Specification applies to normal mode.

<sup>3</sup> Resolution of A/D converter. Specification applies to normal mode.

<sup>4</sup> Specified range refers to the range for which the humidity or temperature sensor specification is guaranteed.

<sup>5</sup> For details about recommended humidity and temperature operating range, please refer to section 1.2.

<sup>6</sup> Time for achieving 63% of a humidity step function, valid at 25°C and 1 m/s airflow. Humidity response time in the application depends on the design-in of the sensor.


<sup>7</sup> Typical value for operation in normal RH/T operating range. Max. value is < 0.5 %RH/y. Value may be higher in environments with vaporized solvents, out-gassing tapes, adhesives, packaging materials, etc. For more details please refer to Handling Instructions.

<sup>8</sup> Temperature response time depends on heat conductivity of sensor substrate and design-in of sensor in application.

<sup>9</sup> Max. value is < 0.04°C/y.

## 1.1 RH Accuracy at Various Temperatures

Typical RH accuracy at 25°C is defined in Figure 2. For other temperatures, typical accuracy has been evaluated to be as displayed in Figure 4.

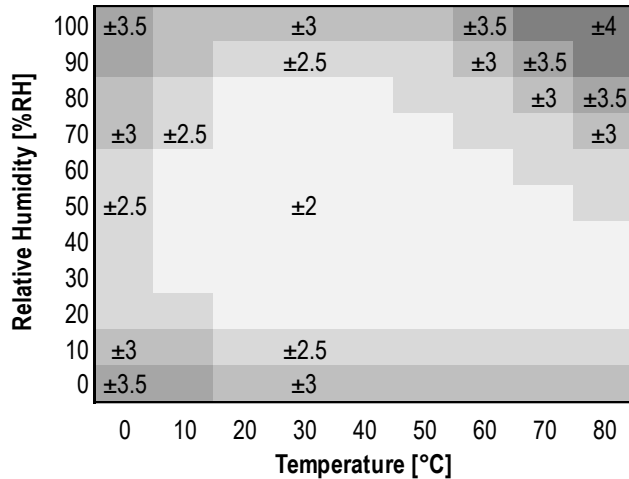

**Figure 4** Typical accuracy of relative humidity measurements given in %RH for temperatures 0°C ... 80°C.

## 1.2 Recommended Operating Conditions

The sensor performs best when operated within the recommended normal temperature and humidity range of 5 – 60 °C and 20 – 80 %RH, respectively. Long-term exposure to conditions outside the normal range, especially at high humidity, may temporarily offset the RH signal (e.g. +3%RH after 60h at >80%RH). After returning to normal temperature and humidity range the sensor will slowly come back to its calibration state by itself. Prolonged exposure to extreme conditions may accelerate ageing.

To ensure stable operation of the humidity sensor, please refer to the Handling Instructions SHT. Please note as well that this does apply not only to transportation and manufacturing, but also to operation of the SHTC3.

## 2 Electrical Specifications

### 2.1 Electrical Characteristics

Default conditions of 25 °C and 3.3 V supply voltage apply to values in the table below, unless otherwise stated.

| Parameter                | Symbol           | Conditions          |              | Min                 | Typ. | Max                  | Units | Comments                                                                                                                  |
|--------------------------|------------------|---------------------|--------------|---------------------|------|----------------------|-------|---------------------------------------------------------------------------------------------------------------------------|
| Supply voltage           | V <sub>DD</sub>  |                     |              | 1.62                | 3.3  | 3.6                  | V     | -                                                                                                                         |
| Power-up/down level      | V <sub>POR</sub> | Static power supply |              | 1.28                | 1.4  | 1.55                 | V     | -                                                                                                                         |
| Supply current           | I <sub>DD</sub>  | Idle state          |              | -                   | 45   | 70                   | μA    | After power-up the sensor remains in the idle state unless a sleep command is issued or other data transmission is active |
|                          |                  | Sleep Mode          |              | -                   | 0.3  | 0.6                  | μA    | When in sleep mode, the sensor requires a dedicated wake-up command to enable further I <sup>2</sup> C communication      |
|                          |                  | Measurement         | Normal Mode  | -                   | 430  | 900                  | μA    | Average current consumption while the sensor is measuring                                                                 |
|                          |                  |                     | Low Power M. | -                   | 270  | 570                  | μA    |                                                                                                                           |
|                          |                  | Average             | Normal Mode  | -                   | 4.9  | -                    | μA    | Average current consumption (continuous operation with one measurement per second)                                        |
|                          |                  |                     |              | Low Power M.        | -    | 0.5                  | -     | μA                                                                                                                        |
| Low level input voltage  | V <sub>IL</sub>  | -                   |              | -                   | -    | 0.42 V <sub>DD</sub> | V     | -                                                                                                                         |
| High level input voltage | V <sub>IH</sub>  | -                   |              | 0.7 V <sub>DD</sub> | -    | -                    | V     | -                                                                                                                         |
| Low level output voltage | V <sub>OL</sub>  | 3 mA sink current   |              | -                   | -    | 0.2 V <sub>DD</sub>  | V     | -                                                                                                                         |

**Table 3** Electrical specifications.

## 2.2 Absolute Maximum Ratings

Stress levels beyond the limits listed in Table 4 may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these conditions cannot be guaranteed. Exposure to the absolute maximum rating conditions for extended periods may affect the reliability of the device. Parameters are only tested each at a time.

| Parameter                                   | Rating         |
|---------------------------------------------|----------------|
| Supply voltage, $V_{DD}$                    | -0.3 to +4 V   |
| Operating temperature range                 | -40 to +125 °C |
| Storage temperature range <sup>10</sup>     | -40 to +125 °C |
| ESD HBM (human body model) <sup>11</sup>    | -2 to 2 kV     |
| ESD CDM (change device model) <sup>12</sup> | -500 to 500 V  |
| Latch up, JEDEC Class II, 125°C             | -100 to 100 mA |

**Table 4** Absolute maximum ratings.

## 3 Timing Specifications

### 3.1 Sensor System Timings

Default conditions of 25 °C and 3.3 V supply voltage apply to values the table below, unless otherwise stated. Max. values are measured at -40 °C.

| Parameter            | Symbol     | Conditions                              | Min. | Typ. | Max. | Units   | Comments                                                                   |
|----------------------|------------|-----------------------------------------|------|------|------|---------|----------------------------------------------------------------------------|
| Power-up time        | $t_{PU}$   | After hard reset, $V_{DD} \geq V_{POR}$ | -    | 180  | 240  | $\mu s$ | Time between $V_{DD}$ reaching $V_{PU}$ and sensor entering the idle state |
| Soft reset time      | $t_{SR}$   | After soft reset.                       | -    | 180  | 240  | $\mu s$ | Time between ACK of soft reset command and sensor entering the idle state  |
| Measurement duration | $t_{MEAS}$ | Average                                 |      |      |      | ms      | Duration for a humidity and temperature measurement                        |
|                      |            | Normal Mode                             | -    | 10.8 | 12.1 |         |                                                                            |
|                      |            | Low Power M.                            | -    | 0.7  | 0.8  |         |                                                                            |

**Table 5** System timing specifications.

<sup>10</sup> The recommended storage temperature range is 10-50°C. Please consult the document "SHTxx Handling Instructions" for more information.

<sup>11</sup> According to ANSI/ESDA/JEDEC JS-001-2014; AEC-Q100-002.


<sup>12</sup> According to ANSI/ESD S5.3.1-2009; AEC-Q100-011.

### 3.2 Communication Timings

Default conditions of 25 °C and 3.3 V supply voltage apply to values in the table below, unless otherwise stated.

| Parameter                                  | Symbol       | Conditions                                            | Standard-mode |      | Fast-mode                   |      | Fast-mode Plus              |      | Units   |
|--------------------------------------------|--------------|-------------------------------------------------------|---------------|------|-----------------------------|------|-----------------------------|------|---------|
|                                            |              |                                                       | Min.          | Max. | Min.                        | Max. | Min.                        | Max. |         |
| SCL clock frequency                        | $f_{SCL}$    | -                                                     | 0             | 100  | 0                           | 400  | 0                           | 1000 | kHz     |
| Hold time (repeated) START condition       | $t_{HD,STA}$ | After this period, the first clock pulse is generated | 4.0           | -    | 0.6                         | -    | 0.26                        | -    | $\mu s$ |
| LOW period of the SCL clock                | $t_{LOW}$    | -                                                     | 4.7           | -    | 1.3                         | -    | 0.5                         | -    | $\mu s$ |
| HIGH period of the SCL clock               | $t_{HIGH}$   | -                                                     | 4.0           | -    | 0.6                         | -    | 0.26                        | -    | $\mu s$ |
| Set-up time for a repeated START condition | $t_{SU,STA}$ | -                                                     | 4.7           | -    | 0.6                         | -    | 0.26                        | -    | $\mu s$ |
| SDA hold time                              | $t_{HD,DAT}$ | -                                                     | 0             | -    | 0                           | -    | 0                           | -    | $\mu s$ |
| SDA set-up time                            | $t_{SU,DAT}$ | -                                                     | 250           | -    | 100                         | -    | 50                          | -    | ns      |
| SCL/SDA rise time                          | $t_R$        | -                                                     | -             | 1000 | 20                          | 300  | -                           | 120  | ns      |
| SCL/SDA fall time                          | $t_F$        | -                                                     | -             | 300  | $20 \times (V_{DD} / 5.5V)$ | 300  | $20 \times (V_{DD} / 5.5V)$ | 120  | ns      |
| SDA valid time                             | $t_{VD,DAT}$ | -                                                     | -             | 3.45 | -                           | 0.9  | -                           | 0.45 | $\mu s$ |
| Set-up time for STOP condition             | $t_{SU,STO}$ | -                                                     | 4.0           | -    | 0.6                         | -    | 0.26                        | -    | $\mu s$ |
| Capacitive load on bus line                | $C_B$        | -                                                     | -             | 400  | -                           | 400  | -                           | 550  | pF      |

**Table 6** Communication timing specifications. The numbers above are values according to the I<sup>2</sup>C specification.

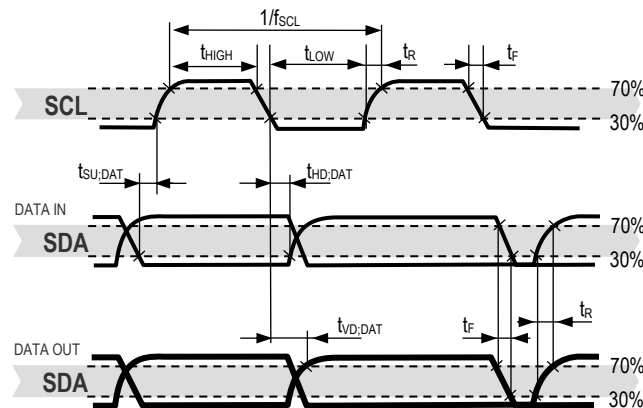


**Figure 5** Timing diagram for digital input/output pads. SDA directions as seen from the sensor. Bold SDA lines are controlled by the sensor, plain SDA lines are controlled by the micro-controller. Note that SDA valid read time is triggered by falling edge of preceding toggle.

## 4 Interface Specifications

The SHTC3 supports I<sup>2</sup>C Normal, Fast Mode and Fast Mode Plus (SCL clock frequency from 0 to 1 MHz) with clock stretching. Please choose the protocol most suited to your application and refer to its specific specifications. For detailed information on the I<sup>2</sup>C protocol, refer to NXP I<sup>2</sup>C-bus specification and user manual UM10204, Rev. 6, April 4<sup>th</sup>, 2014.

The SHTC3 comes in a 4-pin package – see Table 7.

| Pin | Name | Comments                    |
|-----|------|-----------------------------|
| 1   | VDD  | Supply voltage              |
| 2   | SCL  | Serial clock, bidirectional |
| 3   | SDA  | Serial data, bidirectional  |
| 4   | VSS  | Ground                      |




**Table 7** SHTC3 pin assignment (top view). The center pad is internally connected to VSS.

Power-supply pins supply voltage (VDD) and ground (VSS) must be decoupled with a 100 nF capacitor that shall be placed as close to the sensor as possible – see Figure 6.

SCL is used to synchronize the communication between the microcontroller and the sensor. The master must keep the clock frequency within 0 to 1 MHz as specified in Table 6. The SHTC3 may pull down the SCL line when clock stretching is enabled.

The SDA pin is used to transfer data in and out of the sensor. For safe communication, the timing specifications defined in the I<sup>2</sup>C manual must be met.

To avoid signal contention, the microcontroller must only drive SDA and SCL low. External pull-up resistors (e.g. 10 kΩ) are required to pull the signal high. For dimensioning resistor sizes please take the bus capacity requirements into account. Note that pull-up resistors may be included in I/O circuits of microcontrollers.

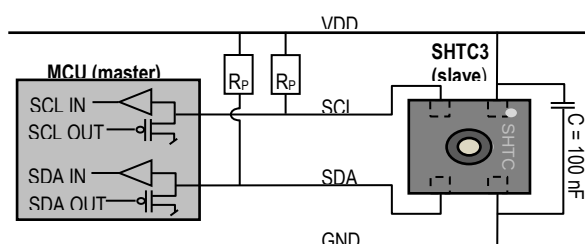

**Figure 6** Typical application circuit, including pull-up resistors  $R_P$  and decoupling of VDD and VSS by a capacitor.

For good performance of the SHTC3 in the application, the center pad of the SHTC3 offers the best thermal contact to

the temperature sensor. For more information on design-in, please refer to the document “SHTxx Design Guide”.

For mechanical reasons the center pad should be soldered. Electrically, the center pad is internally connected to GND and may be connected to the GND net on the PCB additionally.

## 5 Operation and Communication

All commands and memory locations of the SHTC3 are mapped to a 16-bit address space which can be accessed via the I<sup>2</sup>C protocol.

### 5.1 I<sup>2</sup>C Address

The I<sup>2</sup>C device address is given Table 8:

| SHTC3                    | Hex. Code | Bin. Code |
|--------------------------|-----------|-----------|
| I <sup>2</sup> C address | 0x70      | 111'0000  |

**Table 8** SHTC3 I<sup>2</sup>C device address.

Each transmission sequence begins with START condition (S) and ends with an (optional) STOP condition (P) as described in the I<sup>2</sup>C-bus specification.

### 5.2 Power-Up, Sleep, Wakeup

Upon VDD reaching the power-up voltage level  $V_{POR}$ , the SHTC3 enters the idle state after a duration of  $t_{PU}$ . After that, the sensor should be set to sleep mode with the command given in Table 9<sup>13</sup>.

| Command | Hex. Code | Bin. Code           |
|---------|-----------|---------------------|
| Sleep   | 0xB098    | 1011'0000'1001'1000 |

**Table 9** Sleep command of the sensor.

When the sensor is in sleep mode, it requires the following wake-up command before any further communication, see Table 10:

| Command | Hex. Code | Bin. Code           |
|---------|-----------|---------------------|
| Wakeup  | 0x3517    | 0011'0101'0001'0111 |

**Table 10** Wake-up command of the sensor.

### 5.3 Measurement Commands

The SHTC3 provides a clock-stretching option and the order of the signal return can be selected. These parameters are selected by dedicated measurement commands as summarized in Table 11. N. B.: Each measurement command triggers always both, a temperature *and* a relative humidity measurement.

<sup>13</sup> If an immediate sensor signal is desired, sending the sensor to sleep mode can be omitted. Not sending the sensor to sleep mode for an extended amount of time keeps up the current consumption of the sensor.

|              | Clock Stretching Enabled |               | Clock Stretching Disabled |               |
|--------------|--------------------------|---------------|---------------------------|---------------|
|              | Read T First             | Read RH First | Read T First              | Read RH First |
| Normal Mode  | 0x7CA2                   | 0x5C24        | 0x7866                    | 0x58E0        |
| Low Power M. | 0x6458                   | 0x44DE        | 0x609C                    | 0x401A        |


**Table 11** Measurement commands.

## 5.4 Measuring and Reading the Signals

Each measurement cycle contains a set of four commands, each initiated by the I2C START condition and ended by the I2C STOP condition:

1. Wakeup command
2. Measurement command
3. Read out command
4. Sleep command

An exemplary measurement set is shown in Figure 7

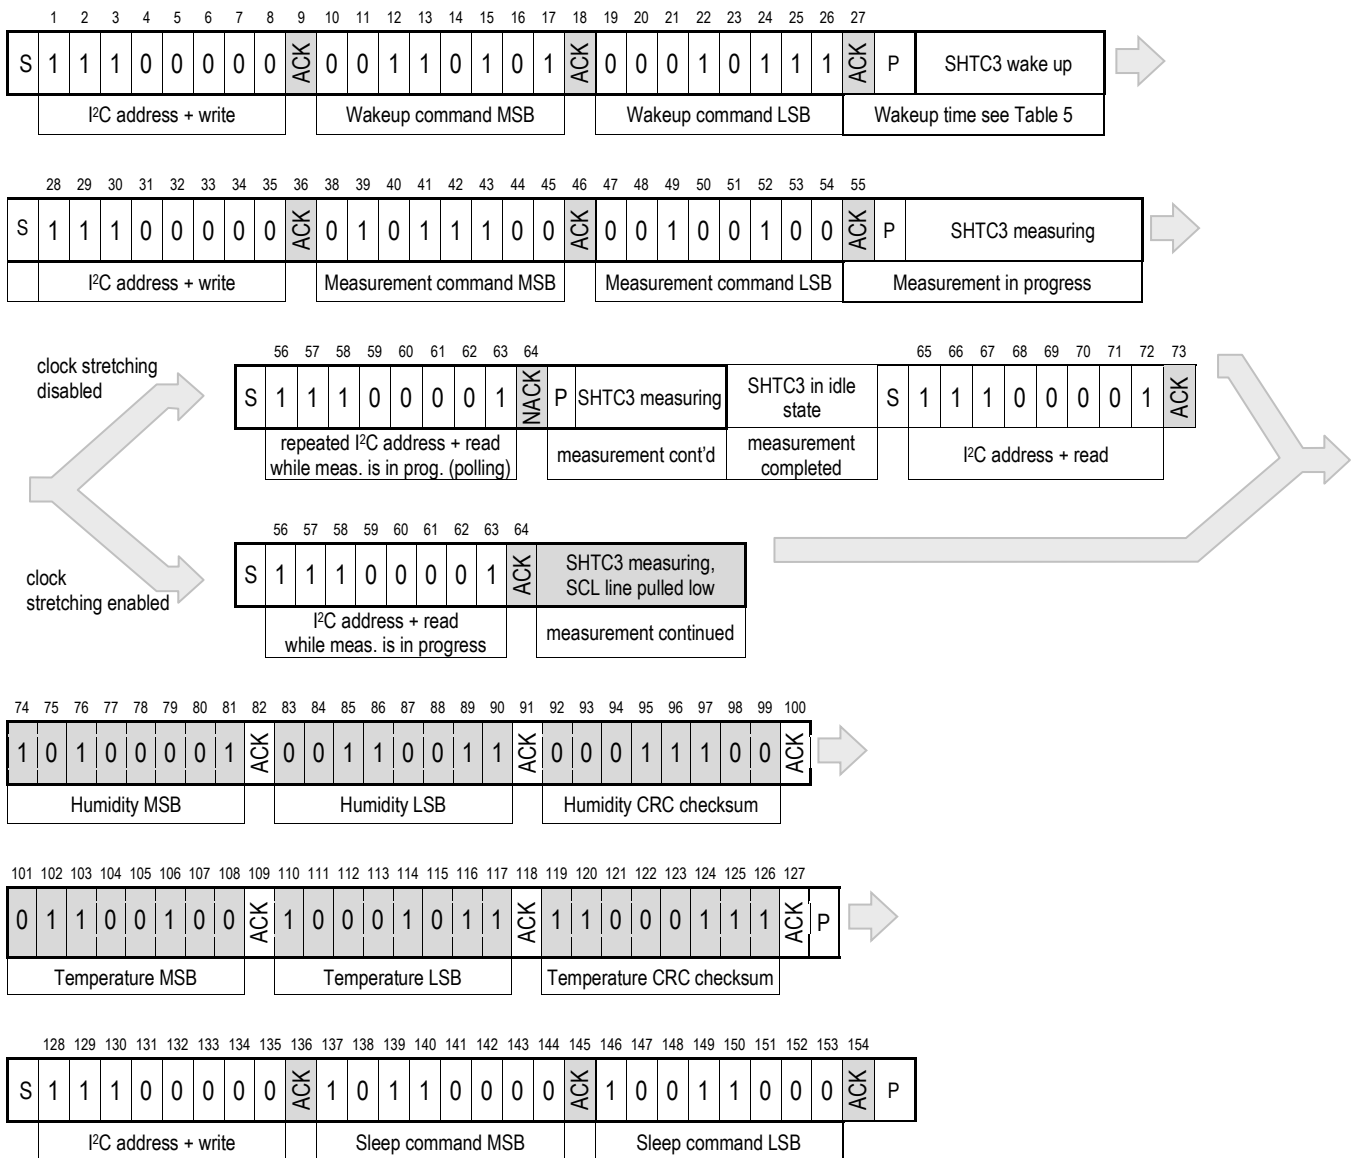

**Figure 7** Communication sequence for waking up the sensor, starting a measurement and reading measurement results displaying both clock stretching options.

The numerical example corresponds to a read humidity-first command with clock stretching enabled. The physical values of the transmitted measurement results are 63 %RH and 23.7 °C. Clear blocks are controlled by the microcontroller, grey blocks by the SHTC3.

## 5.5 Sensor Behavior during Measurement and Clock Stretching

In general, the sensor does not respond to any I<sup>2</sup>C activity during measurement, i.e. I<sup>2</sup>C read and write headers are not acknowledged (NACK). However, when clock stretching has been enabled by using a corresponding measurement command, the sensor responds to a read header with an ACK and subsequently pulls down the SCL line until the measurement is complete. As soon as the measurement is complete, the sensor starts sending the measurement results.

During measurement, the sensor has a current consumption according to Table 3.

For best possible repeatability of humidity and temperature measurements, it is recommended to avoid any communication on the I<sup>2</sup>C bus while the SHTC3 is measuring. For more information, see the application note "Optimization of Repeatability".

## 5.6 Readout of Measurement Results

After a measurement command has been issued and the sensor has completed the measurement, the master can read the measurement results by sending a START condition followed by an I<sup>2</sup>C read header. The sensor will acknowledge the reception of the read header and send two bytes of data followed by one byte CRC checksum and another two bytes of data followed by one byte CRC checksum. Each byte must be acknowledged by the microcontroller with an ACK condition for the sensor to continue sending data. If the SHTC3 does not receive an ACK from the master after any byte of data, it will not continue sending data.

The I<sup>2</sup>C master can abort the read transfer with a NACK condition after any data byte if it is not interested in subsequent data, e.g. the CRC byte or the second measurement result, in order to save time.

In case the user needs humidity and temperature data but does not want to process CRC data, it is recommended to read the first two bytes of data with the CRC byte (without processing the CRC data) and abort the read transfer after reading the second two data bytes with a NACK. This procedure is more time efficient than starting two different measurements and aborting the read transfer after the first two data bytes each time.

## 5.7 Soft Reset

The SHTC3 provides a soft reset mechanism that forces the system into a well-defined state without removing the power supply. If the system is in its idle state (i.e. if no measurement is in progress) the soft reset command can be sent to SHTC3 according to Table 12. This triggers the

sensor to reset all internal state machines and reload calibration data from the memory.

| Command        | Hex. Code | Bin. Code           |
|----------------|-----------|---------------------|
| Software reset | 0x805D    | 1000'0000'0101'1101 |

**Table 12** Soft reset command.

## 5.8 Reset through General Call

Additionally, a reset of the sensor can also be generated using the "general call" mode according to I<sup>2</sup>C-bus specification<sup>14</sup>. This generates a reset which is functionally identical to using the nReset pin. It is important to understand that a reset generated in this way is not device specific. All devices on the same I<sup>2</sup>C bus that support the general call mode will perform a reset. Additionally, this command only works when the sensor is able to process I<sup>2</sup>C commands. The appropriate command consists of two bytes and is shown in Table 13.

| Command                                      | Code   |
|----------------------------------------------|--------|
| Address byte                                 | 0x00   |
| Second byte                                  | 0x06   |
| Reset command using the general call address | 0x0006 |

**Table 13** Reset through the general call address (clear blocks are controlled by the microcontroller, grey blocks by the sensor)

## 5.9 Read-out of ID Register

The SHTC3 has an ID register which contains an SHTC3-specific product code. The read-out of the ID register can be used to verify the presence of the sensor and proper communication. The command to read the ID register is shown in Table 14.

| Command          | Hex. Code | Bin. Code           |
|------------------|-----------|---------------------|
| Read ID register | 0xEFC8    | 1110'1111'1100'1000 |

**Table 14** Read-out command of ID register.


It needs to be sent to the SHTC3 after an I<sup>2</sup>C write header. Once the SHTC3 has acknowledged the proper reception of the command, the master can send an I<sup>2</sup>C read header and the SHTC3 submits the 16-bit ID followed by 8 bits of CRC. The structure of the ID is described in Table 15.

<sup>14</sup> [http://www.nxp.com/documents/user\\_manual/UM10204.pdf](http://www.nxp.com/documents/user_manual/UM10204.pdf)



## 9 Technical Drawings

### 9.1 Package Outline

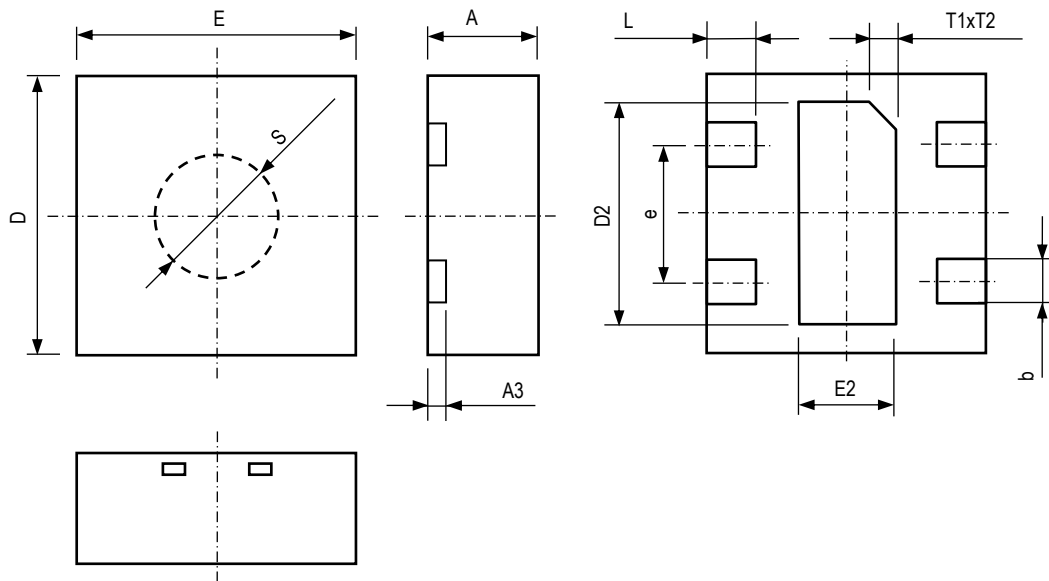

\* Mold opening shows smooth transition to package surface. Therefore this dimension is not well defined and given for reference only.

**Figure 9** Package outline drawing of the SHTC3.

| Parameter          | Symbol | Min | Nom.    | Max | Units | Comments                                                                                                                            |
|--------------------|--------|-----|---------|-----|-------|-------------------------------------------------------------------------------------------------------------------------------------|
| Package height     | A      | 0.7 | 0.75    | 0.8 | mm    | -                                                                                                                                   |
| Leadframe height   | A3     | -   | 0.15    | -   | mm    | -                                                                                                                                   |
| Pad width          | b      | 0.3 | 0.35    | 0.4 | mm    | -                                                                                                                                   |
| Package width      | D      | 1.9 | 2       | 2.1 | mm    | -                                                                                                                                   |
| Center pad length  | D2     | 1.5 | 1.6     | 1.7 | mm    | -                                                                                                                                   |
| Package length     | E      | 1.9 | 2       | 2.1 | mm    | -                                                                                                                                   |
| Center pad width   | E2     | 0.6 | 0.7     | 0.8 | mm    | -                                                                                                                                   |
| Pad pitch          | e      | -   | 1       | -   | mm    | -                                                                                                                                   |
| Pad length         | L      | 0.3 | 0.35    | 0.4 | mm    | -                                                                                                                                   |
| Max cavity         | S      | -   | -       | 1   | mm    | Mold opening shows smooth transition to package surface. Therefore this dimension is not well defined and given for reference only. |
| Center pad marking | T1xT2  | -   | 0.2x45° | -   | mm    | indicates the position of pin 1                                                                                                     |

**Table 18** Package outline dimensions and tolerances.



## 10 Further Information

For more in-depth information on the SHTC3 and its application please consult the following documents:

| Document Name                                     | Description                                                              | Source                                                                                                                                                                    |
|---------------------------------------------------|--------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SHTxx Design Guide                                | Design guidelines for designing SHTxx humidity sensors into applications | Available for download at the Sensirion humidity sensors download center:<br><a href="http://www.sensirion.com/humidity-download">www.sensirion.com/humidity-download</a> |
| SHTxx Handling Instructions                       | Guidelines for proper handling of SHTxx humidity sensors                 | Available for download at the Sensirion humidity sensors download center:<br><a href="http://www.sensirion.com/humidity-download">www.sensirion.com/humidity-download</a> |
| Sensirion Humidity Sensor Specification Statement | Definition of sensor specifications.                                     | Available for download at the Sensirion humidity sensors download center:<br><a href="http://www.sensirion.com/humidity-download">www.sensirion.com/humidity-download</a> |

**Table 19** Documents containing further information relevant for the SHTC3.

## Revision History

| Date          | Version | Page(s) | Changes                                                                                                                                                               |
|---------------|---------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| July 2018     | 1       | all     | Initial version                                                                                                                                                       |
| January 2019  | 1.1     | 5       | Added explicit specifications of normal and fast I <sup>2</sup> C mode.                                                                                               |
| June 2019     | 2       | 1, 2    | Added statement on NIST traceability                                                                                                                                  |
| January 2021  | 3       | 10      | Added dimension tolerances, updated "Important Notices".                                                                                                              |
| December 2022 | 4       | 12      | Updated Table 19 due to obsolete document: Information covered now in handling instructions. Also changed reference in text to reference to the handling instruction. |

## Important Notices

### Warning, Personal Injury

**Do not use this product as safety or emergency stop devices or in any other application where failure of the product could result in personal injury. Do not use this product for applications other than its intended and authorized use. Before installing, handling, using or servicing this product, please consult the data sheet and application notes. Failure to comply with these instructions could result in death or serious injury.**

If the Buyer shall purchase or use SENSIRION products for any unintended or unauthorized application, Buyer shall defend, indemnify and hold harmless SENSIRION and its officers, employees, subsidiaries, affiliates and distributors against all claims, costs, damages and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if SENSIRION shall be allegedly negligent with respect to the design or the manufacture of the product.

### ESD Precautions

The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation, take customary and statutory ESD precautions when handling this product. See application note "ESD, Latchup and EMC" for more information.

### Warranty

SENSIRION warrants solely to the original purchaser of this product for a period of 12 months (one year) from the date of delivery that this product shall be of the quality, material and workmanship defined in SENSIRION's published specifications of the product. Within such period, if proven to be defective, SENSIRION shall repair and/or replace this product, in SENSIRION's discretion, free of charge to the Buyer, provided that:

- notice in writing describing the defects shall be given to SENSIRION within fourteen (14) days after their appearance;
- such defects shall be found, to SENSIRION's reasonable satisfaction, to have arisen from SENSIRION's faulty design, material, or workmanship;
- the defective product shall be returned to SENSIRION's factory at the Buyer's expense; and
- the warranty period for any repaired or replaced product shall be limited to the unexpired portion of the original period.

This warranty does not apply to any equipment which has not been installed and used within the specifications recommended by SENSIRION for the intended and proper use of the equipment. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH HEREIN, SENSIRION MAKES NO WARRANTIES, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO THE PRODUCT. ANY AND ALL WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSLY EXCLUDED AND DECLINED.

SENSIRION is only liable for defects of this product arising under the conditions of operation provided for in the data sheet and proper use of the goods. SENSIRION explicitly disclaims all warranties, express or implied, for any period during which the goods are operated or stored not in accordance with the technical specifications.

SENSIRION does not assume any liability arising out of any application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. All operating parameters, including without limitation recommended parameters, must be validated for each customer's applications by customer's technical experts. Recommended parameters can and do vary in different applications.

SENSIRION reserves the right, without further notice, (i) to change the product specifications and/or the information in this document and (ii) to improve reliability, functions and design of this product.

Copyright © 2021, by SENSIRION. CMOSens® is a trademark of Sensirion. All rights reserved

## Headquarters and Subsidiaries

### Sensirion AG

Laubisruestr. 50  
CH-8712 Staefa ZH  
Switzerland

phone: +41 44 306 40 00  
fax: +41 44 306 40 30  
[info@sensirion.com](mailto:info@sensirion.com)  
[www.sensirion.com](http://www.sensirion.com)

### Sensirion Taiwan Co. Ltd

phone: +886 3 5506701  
[info@sensirion.com](mailto:info@sensirion.com)  
[www.sensirion.com](http://www.sensirion.com)

### Sensirion Inc., USA

phone: +1 312 690 5858  
[info-us@sensirion.com](mailto:info-us@sensirion.com)  
[www.sensirion.com](http://www.sensirion.com)

### Sensirion Japan Co. Ltd.

phone: +81 3 3444 4940  
[info-jp@sensirion.com](mailto:info-jp@sensirion.com)  
[www.sensirion.com/jp](http://www.sensirion.com/jp)

### Sensirion Korea Co. Ltd.

phone: +82 31 337 7700~3  
[info-kr@sensirion.com](mailto:info-kr@sensirion.com)  
[www.sensirion.com/kr](http://www.sensirion.com/kr)

### Sensirion China Co. Ltd.

phone: +86 755 8252 1501  
[info-cn@sensirion.com](mailto:info-cn@sensirion.com)  
[www.sensirion.com/cn](http://www.sensirion.com/cn)

To find your local representative, please visit [www.sensirion.com/distributors](http://www.sensirion.com/distributors)