



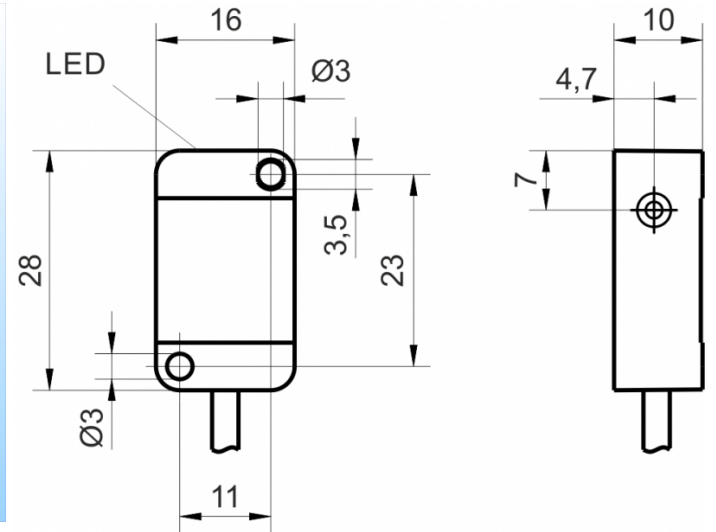

Name
Order number
Switching distance
Mounting


KJ2-Q28KB-DPÖ
08310000437
2 mm




Switch type



Signal Type
Connection



Connection diagramm

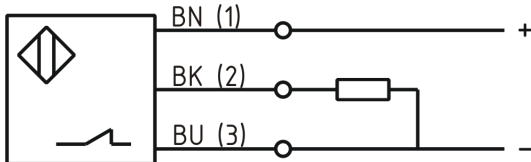

Dimension (in mm)
Technical Specification
Operating voltage
Max. ripple
Voltage drop
Max. load current
No load current
Leakage current
Switching frequency
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy
Switching state
Time delay
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Cable length

Q 28 x 10 x 16
10 - 30 VDC
 $\leq 10 \%$
2,4 V
200 mA
 $\leq 13 \text{ mA}$
 $\leq 10 \mu\text{A}$
1000 Hz
 $\leq 15 \%$
-25 ° C to 70 ° C
 $\leq 10 \%$
 $\leq 2 \%$
LED
100 ms
yes
yes
yes
IP67
DIN EN 60947-5-2: 2008
Plastic
2 m



KJ2-Q28KB-DPÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Utilisation category	DC 13
Cable material	PVC LIYY grau (grey)
Cable cross	3x0.14 mm ²
FIT / MTTF acc. to SIEMENS 29500	40,55 / 2815y
Housing Material	PA6 GF30 black translucent

Errors and omissions exceptet