

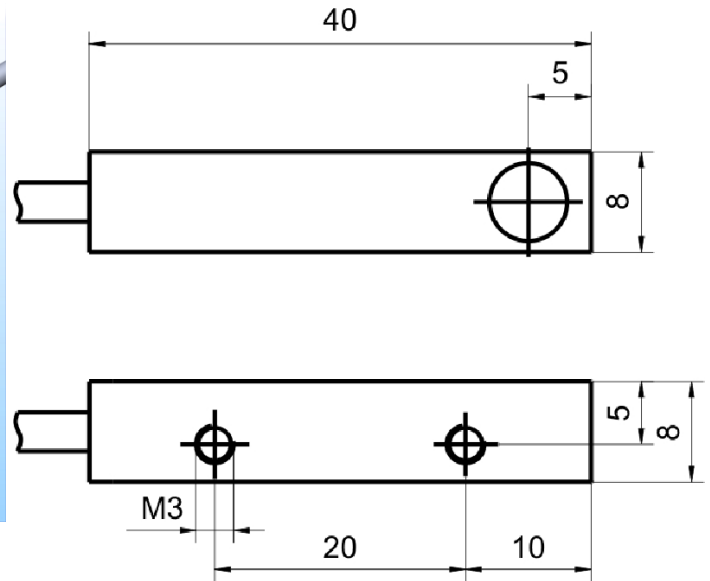


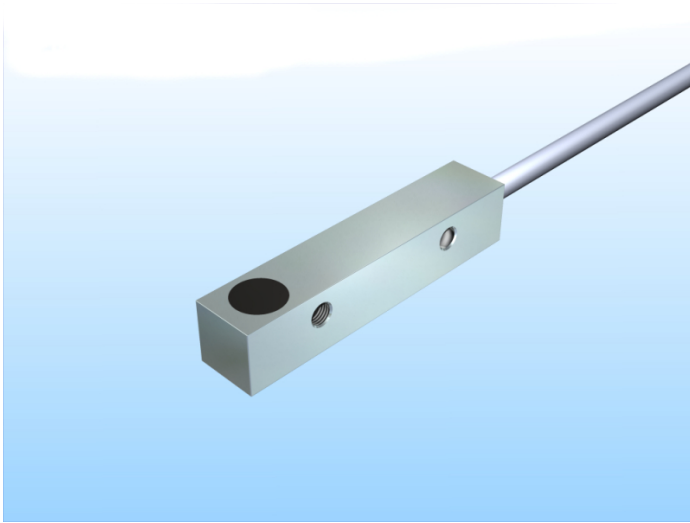

Name
Order number
Switching distance
Mounting

KJ3-Q8MB40-DPÖ
08310000835
3 mm



shielded




N.C.
DC PNP



Cable

Connection diagramm

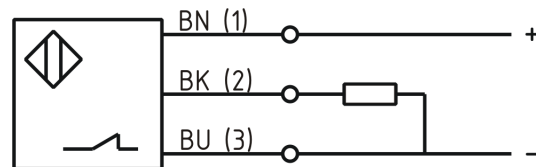

8 x 8 x 40

Dimension (in mm)
Technical Specification
Special features
Operating voltage
Max. ripple
Voltage drop
Max. load current
No load current
Leakage current
Switching frequency
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy
Switching state
Time delay
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category

quasi-shielded mounting
10 - 30 VDC
 $\leq 10 \%$
2,4 V
200 mA
 $\leq 13 \text{ mA}$
 $\leq 10 \mu\text{A}$
1000 Hz
 $\leq 15 \%$
-25°C ° C to 70 ° C
 $< 10 \%$
 $\leq 5 \%$
LED
300 ms
yes
yes
yes
IP 67



KJ3-Q8MB40-DPÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

EMC-level
Housing material
Material active face
Cable length
Utilisation category
Cable material
Cable cross
FIT / MTTF acc. to SIEMENS 29500

DIN EN 60947-5-2: 2008
Brass, nickel plated
Ultramid schwarz (black)
2 m
DC 13
PVC LIYY grau (grey)
3x0.14 mm²
49,56 / 2303y

Errors and omissions exceptet