
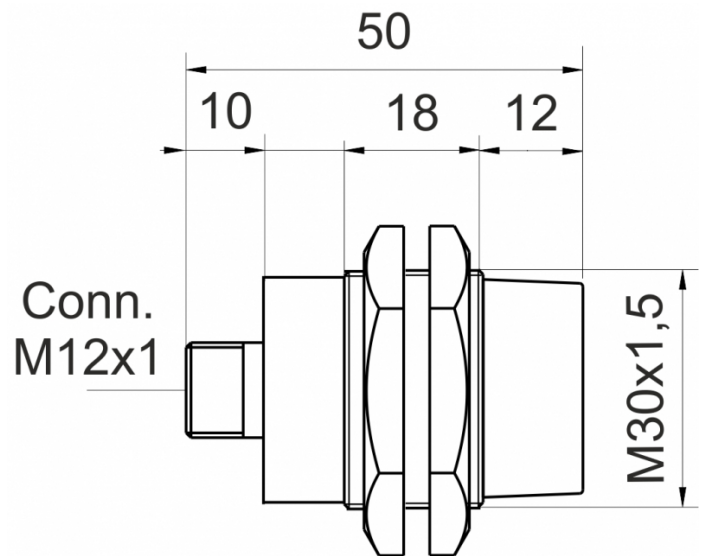


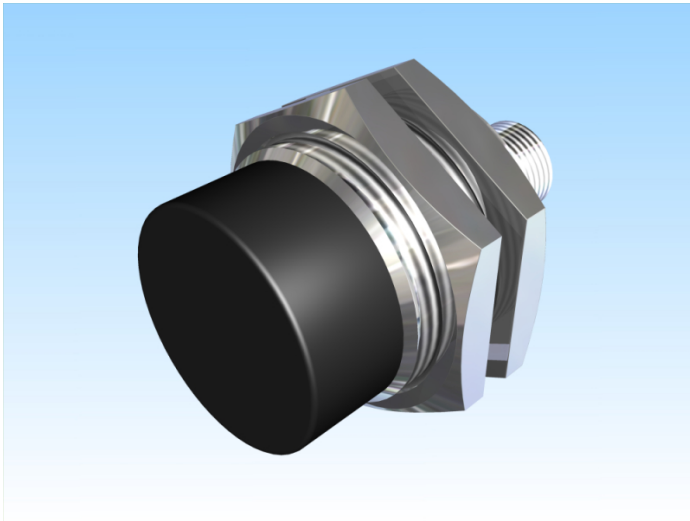


Name
Order number
Switching distance
Mounting

Switch type

Signal Type
Connection
Connection diagramm

KJ15-M30MN50-ANI-V2
08310001032
from 3 mm to 15 mm

 non shielded
 analog current
analog current
connector M12

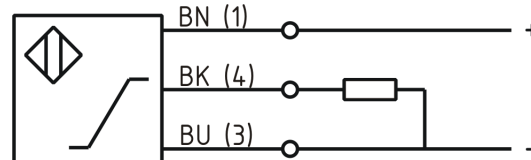

fine-pitch thread M30 x 50

Dimension (in mm)
Technical Specification
Special features
Operating voltage
Max. ripple
No load current
Switching frequency
Operating temperature
Temperature drift
Repeat accuracy
Linearity
Time delay
Resolution
Reverse voltage protection
Protection category
EMC-level
Housing material
Material active face
Utilisation category
Contact material
Contact surface material
Contact holder
Nominal operating voltage

Output Current 4 ... 20 mA
11 - 35 VDC
 $\leq 5 \%$
 $\leq 10 \text{ mA}$
150 Hz
-25 ° C to 70 ° C
 $\pm 5 \%$
 $\leq 1 \%$
 $\leq 5 \%$
300 ms
1,33 mA / mm
yes
IP67
DIN EN 60947-5-7:2004-06
Brass, nickel plated
PCB
DC 13
CuSn
NiAu
PA 6
24 V DC



Termination
internal load resistor

KJ15-M30MN50-ANI-V2

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Connector M12 4pin