
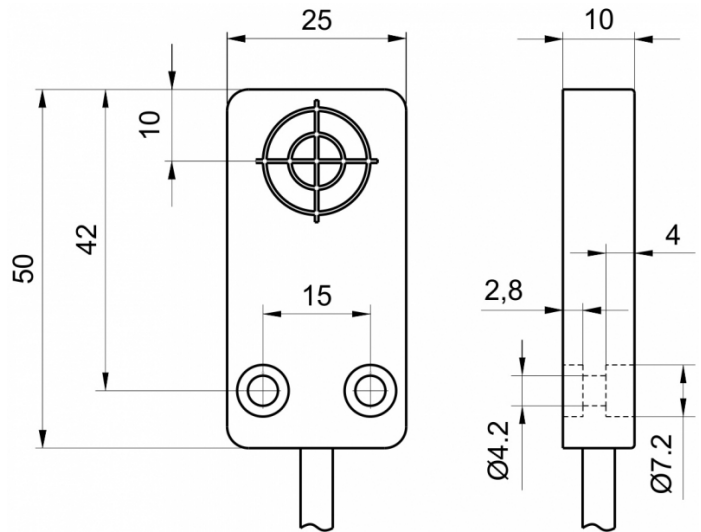


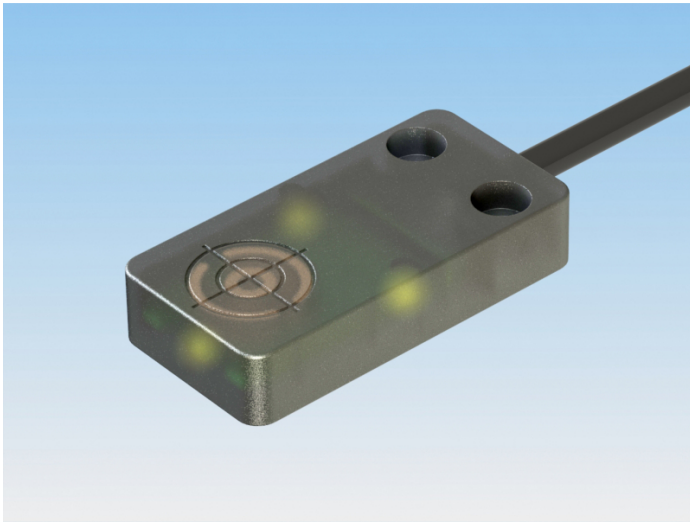

Name  
Order number  
Switching distance  
Mounting

KJ8-Q25KN-DPÖ  
08310001952  
8 mm

 non shielded


Switch type

 N.C.  
DC PNP

Signal Type  
Connection

 Cable

Connection diagramm

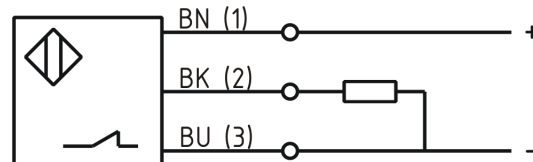

Q 25 x 10 x 50

Dimension (in mm)  
Technical Specification  
Operating voltage  
Max. ripple  
Voltage drop  
Max. load current  
No load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Switching state  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Cable length  
Utilisation category

10 - 30 VDC  
≤ 10 %  
2,4 V  
200 mA  
≤ 13 mA  
≤ 10 µA  
800 Hz  
≤ 15 %  
-25 ° C to 70 ° C  
≤ 10 %  
≤ 5 %  
LED  
yes  
yes  
yes  
IP 67  
DIN EN 60947-5-2: 2008  
PA 6.6  
2 m  
DC 13



## KJ8-Q25KN-DPÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Cable material  
Nominal operating voltage  
Cable cross  
FIT / MTTF

PVC  
24 V DC  
3x0.34 mm<sup>2</sup>  
90,13 / 1267y

**Errors and omissions exceptet**