

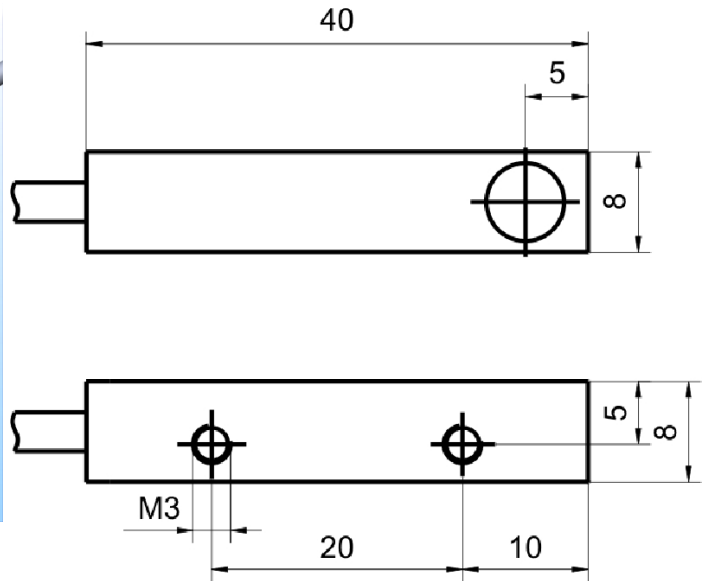


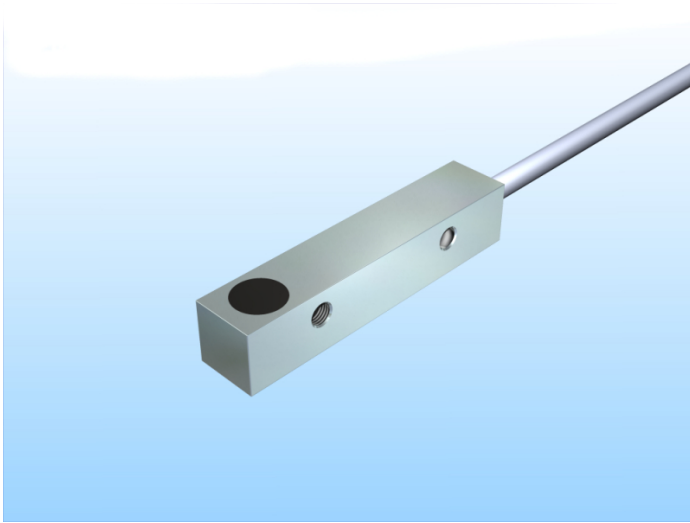


Name  
Order number  
Switching distance  
Mounting

KJ2-Q8MB-DPÖ  
08310020475  
2 mm



shielded




N.C.

DC PNP



Cable

Connection diagramm

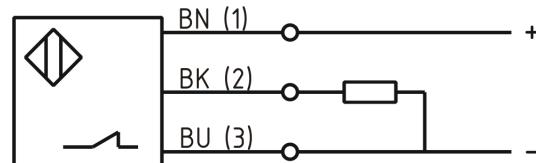

Q 8 x 8 x 40

Dimension (in mm)  
Technical Specification  
Operating voltage  
Max. ripple  
Voltage drop  
Max. load current  
No load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Switching state  
Time delay  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level

10 - 30 VDC  
 $\leq 10 \%$   
2,4 V  
200 mA  
 $\leq 13 \text{ mA}$   
 $\leq 10 \mu\text{A}$   
1000 Hz  
 $\leq 15 \%$   
-25 ° C to 70 ° C  
 $\leq 10 \%$   
 $\leq 5 \%$   
LED  
100 ms  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2:2008



## KJ2-Q8MB-DPÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Housing material  
Material active face  
Cable length  
Utilisation category  
Cable material  
Cable cross  
FIT / MTTF acc. to SIEMENS 29500

Brass, nickel plated  
Ultramid schwarz (black)  
2 m  
DC 13  
PVC LIYY grau (grey)  
3x0.14 mm<sup>2</sup>  
49,56 / 2369y

**Errors and omissions excepted**