



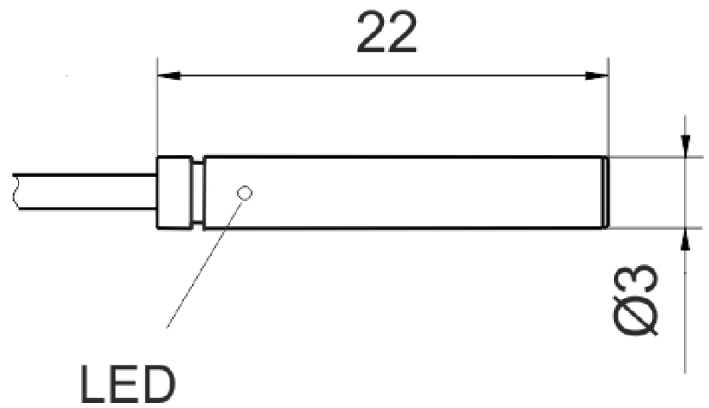


Name  
Order number  
Matchcode  
Switching distance  
Mounting


SJ0,8-G3EB22-DPS  
08313030081  
9980-3010  
0,8 mm




Switch type



Signal Type  
Connection



Connection diagramm

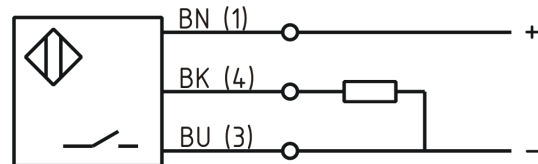

Dimension (in mm)  
Technical Specification  
Operating voltage  
Max. ripple  
Voltage drop  
Max. load current  
No load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Switching state  
Efficiency  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Material active face  
Cable material  
Termination

D 3 x 22  
10 - 30 VDC  
 $\leq 10$  %  
1 V  
200 mA  
 $\leq 10$  mA  
 $\leq 10$   $\mu$ A  
2000 Hz  
 $\leq 15$  %  
-25 ° C to 70 ° C  
 $\leq 10$  %  
 $\leq 1$  %  
LED  
DC 13  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2:2008  
Stainless steel V2A  
POM  
PUR LIY11Y grau (gre  
2m PUR 3x0,15mm<sup>2</sup>



## **SJ0,8-G3EB22-DPS**

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

**Errors and omissions exceptet**