
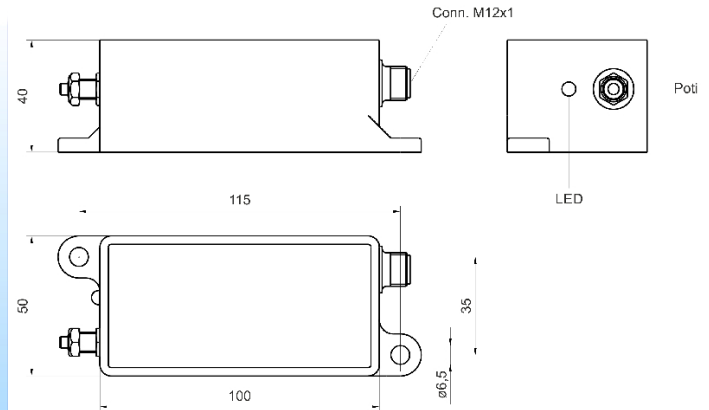


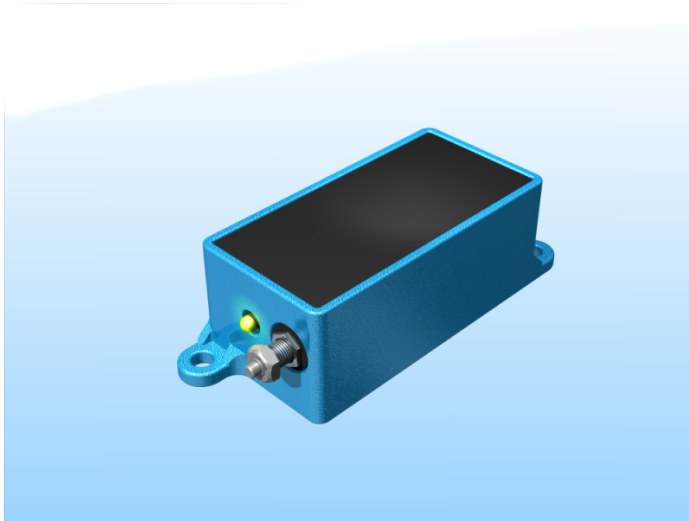

Name  
Order number  
Matchcode  
Switching distance  
Mounting

KJ70-Q100AN-DNS-V2-F1  
08317090365  
9809-0365  
70 mm

 non shielded


Switch type

 N.O.  
DC NPN

Signal Type  
Connection

 Connector

Connection diagramm

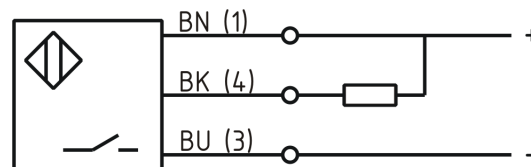

Q 100 x 50 x 40

Dimension (in mm)  
Technical Specification  
Operating voltage  
Max. ripple  
Voltage drop  
Max. load current  
No load current  
Leakage current  
Switching frequency  
Switching hysteresis  
Operating temperature  
Temperature drift  
Repeat accuracy  
Switching state  
Short-circuit proof  
Overload protection  
Reverse voltage protection  
Protection category  
EMC-level  
Housing material  
Termination

10 - 30 VDC  
≤ 10 %  
2,4 V  
400 mA  
≤ 12 mA  
≤ 10 μA  
300  
≤ 15 %  
-25 ° C to 70 ° C  
< 10 %  
≤ 2 %  
LED  
yes  
yes  
yes  
IP67  
DIN EN 60947-5-2:2008  
Aluminum  
Connector M12 4pol



## KJ70-Q100AN-DNS-V2-F1

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Notes

Schaltabstand über Potentiometer einstellbar.

**Errors and omissions excepted**