
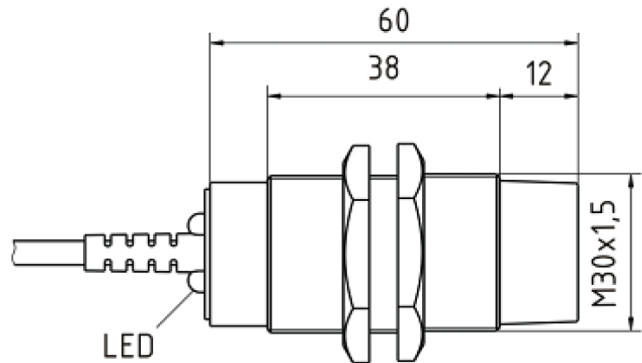


[Article Page](#)

Product Description

inductive sensor AC/DC

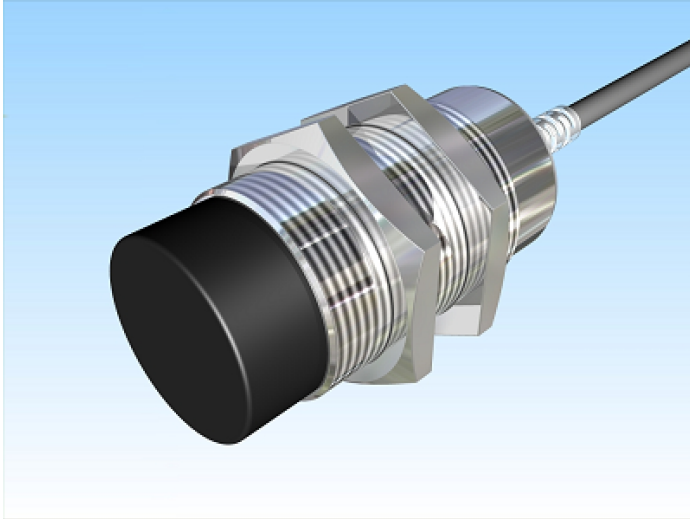

Name

KJ10-M30MN60-VZÖ

Order number

08317171700

Switching distance

15 mm

Mounting

 non shielded

Switch type


 N.C.
AC/DC

Signal Type

Connection

 Cable

Connection diagramm

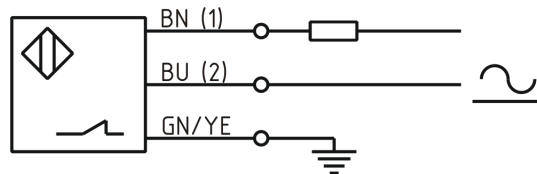

Dimension (in mm)

fine-pitch thread M30 x 60

Technical Specification

Operating voltage

20 - 250 V AC/DC

Voltage drop

5 V

Max. load current

350 mA

Leakage current

≤ 1,7 mA

Switching frequency

30

Switching hysteresis

≤ 15 %

Operating temperature

-25 ° C to 70 ° C

Temperature drift

≤ 10 %

Repeat accuracy

≤ 5 %

Switching state

LED

Short-circuit proof

yes

Overload protection

yes

Reverse voltage protection

yes

Protection category

IP67

EMC-level

DIN EN 60947-5-2:2008

Material active face

PCB

Termination

2m PVC 3x0,5mm²

Notes

Kurzschluss- und Überlastungsschutz rastend. Nach Beseitigung des Kurzschlusses muß die Spannungsversorgung für ca. 2s unterbrochen werden.



KJ10-M30MN60-VZÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Errors and omissions exceptet