


[Article Page](#)

Product Description
 Name
 Order number
 Matchcode
 Switching distance
 Mounting

inductive sensor DC
 KJ3-M8EB60-DPÖ-V1
 08317815464
 9981-5000
 3 mm




Switch type



Signal Type
 Connection



Connection diagramm

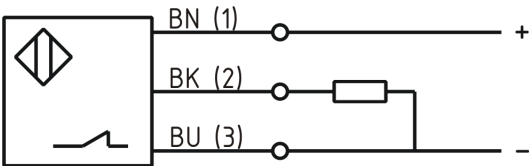

fine-pitch thread M8 x 60

Dimension (in mm)
 Technical Specification
 Operating voltage
 Max. ripple
 Voltage drop
 Max. load current
 No load current
 Leakage current
 Switching frequency
 Switching hysteresis
 Operating temperature
 Temperature drift
 Repeat accuracy
 Switching state
 Digital output
 Short-circuit proof
 Overload protection
 Reverse voltage protection
 Protection category
 EMC-level
 Housing material
 Material active face
 Termination

10 - 30 VDC
 ≤ 10 %
 1 V
 200 mA
 ≤ 10 mA
 ≤ 10 µA
 1000
 ≤ 15 %
 -25 ° C to 70 ° C
 < 10 %
 ≤ 2 %
 LED
 yes
 yes
 yes
 IP67
 DIN EN 60947-5-2:2008
 Stainless steel V2A
 PA 6.6
 Connector M8 3pol

Errors and omissions exceptet