

[Article Page](#)

Product Description
Name
Order number
Switching distance
Mounting

capacitive sensor DC
KC15-M30KN60-DPS
08320000020
15 mm



non shielded

Switch type



N.O.


Signal Type
Connection

DC PNP



Cable

Connection diagramm

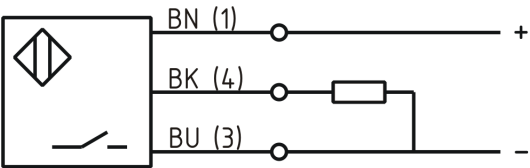

fine-pitch thread M30 x 60

Dimension (in mm)
Technical Specification
Operating voltage
Max. ripple
Voltage drop
Max. load current
No load current
Leakage current
Switching frequency
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy
Switching state
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Housing material
Termination

10 - 30 VDC
≤ 10 %
3 V
200 mA
≤ 20 mA
≤ 10 µA
10
≤ 15 %
-25 ° C to 70 ° C
≤ 10 %
≤ 5 %
LED
yes
yes
yes
IP67
DIN EN 60947-5-2:2008
PA 6.6
2m PVC 3x0,34mm²

Errors and omissions excepted