
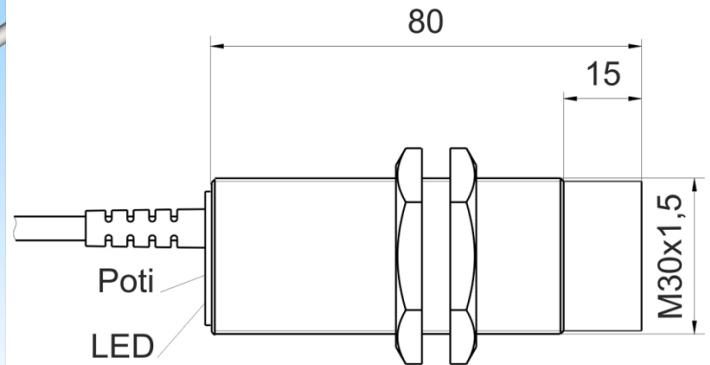


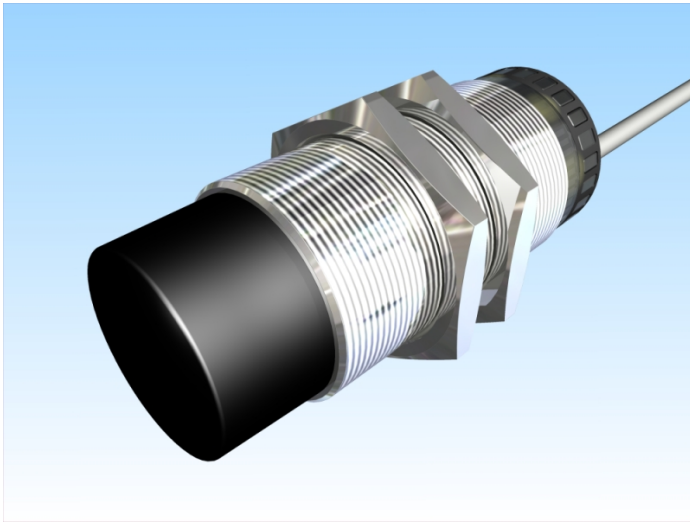

Name
Order number
Switching distance
Mounting

SC20-M30MN80-VZÖ
08323302080
20 mm

 non shielded


Switch type

 N.C.
AC/DC

Signal Type
Connection

 Cable

Connection diagramm

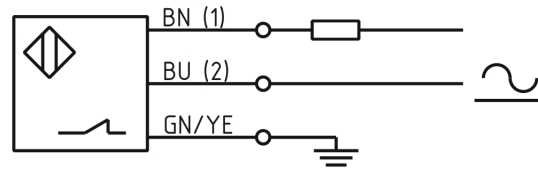

Dimension (in mm)
Technical Specification
Operating voltage
Min. load current
Max. load current
Leakage current
Switching hysteresis
Operating temperature
Temperature drift
Repeat accuracy
Switching state
Short-circuit proof
Overload protection
Reverse voltage protection
Protection category
EMC-level
Material active face
Termination
Notes

fine-pitch thread M30 x 80

20 - 250 V AC/DC

5 mA

200 mA

≤ 2,5 mA

≤ 15 %

-25 ° C to 70 ° C

≤ 1-15 %

≤ 1 %

LED

yes

yes

yes

IP67

DIN EN 60947-5-2:2008

PBT

2m PVC 3x0,5mm²

Netzfrequenz: 50/60Hz Spannungsabfall: 10V DC /
8V AC Kurzzeitstrom: 2,2A (20ms) Max.

Schaltfrequenz: AC 25Hz / DC 40Hz



SC20-M30MN80-VZÖ

Pulsotronic GmbH & Co. KG Neue Schichtstraße 14b 09366 Niederdorf Deutschland +49 (0)37296 930-200

Errors and omissions exceptet