

Accessories


Connecting pipe

Description **S1W-M12C4/AW-5PU**

Article number **6075689088**

Pin assignment

1	BN	1
2	WH	2
3	BU	3
4	BK	4

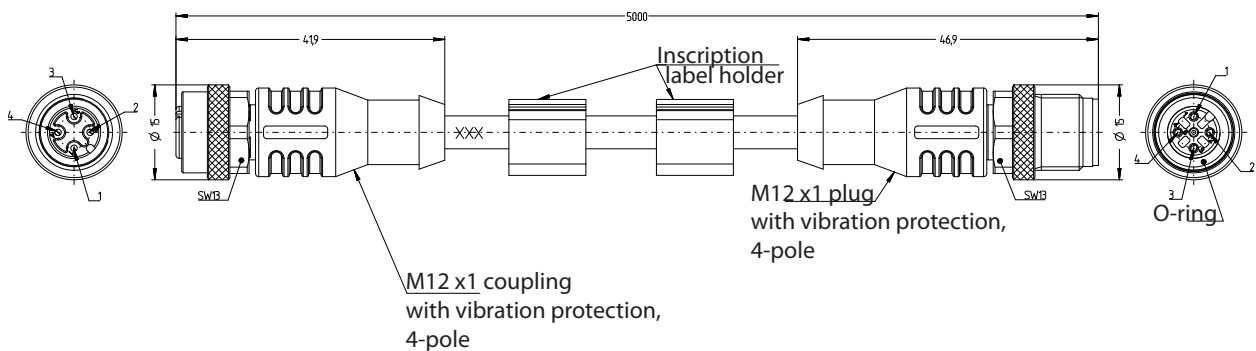

Electrical Data

Operating voltage	max. 250 V
Current rating	4 A at 40 °C
Insulation resistance	≥100 MΩ

Mechanical Data

Connection	M12x1, 4-pole (A-Coded)
Cable	LiF9YH-11YH 4 x 0,34 mm ² x 5 m +50 mm, outer-jacket PUR UL, black
Overmolding	TPU
Ambient temperature	-30 °C ... +90 °C
Degree of pollution	3
Type of protection	IP68 (only in fully snapped-in position with it's plugs)