



Coded switches



3 m PVC cable					
Designation			MAK-4236-3		
Part number			649.0642.301		
Delivery: ex-stock/built to order			●/—		
6 m PVC cable					
Designation			MAK-4236-6		
Part number			649.0642.302		
Delivery: ex-stock/built to order			●/—		
9 m PVC cable					
Designation			MAK-4236-9		
Part number			649.0642.303		
Delivery: ex-stock/built to order			●/—		
Plug RD 6.5 mm/4 poles					
Designation			MAK-4236-STK		
Part number			649.0642.305		
Delivery: ex-stock/built to order			●/—		
Switching capacity					
Operating voltage		max.	DC 30 V		
Switching capacity		max.	250 mW		
Ambient conditions					
Temperatur range		min./max.	-5 °C/+70 °C		
			+23 °F/+158 °C		
Protection class (according to IEC 529, EN 60529)			IP 67		
Housing material			PA 6.6		
Sensing distance		S on min.	5 mm		8 mm
		S off max.	14 mm		16 mm
Operating magnet					
Designation			TK-42-CD		TK-42-CD-SN8
Part number			640.2042.301		640.2042.306
To be used MÜZ					
see page			256–257		256–257

All dimensions in mm

Other versions available on request.
SW: wrench size

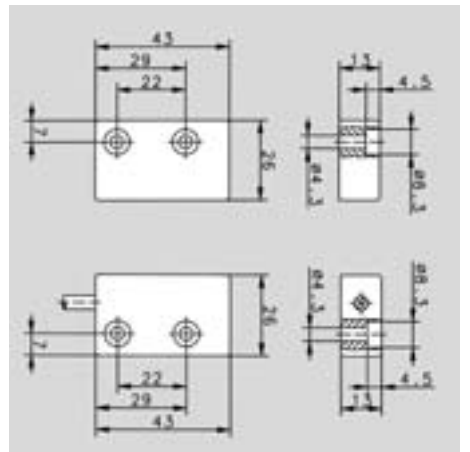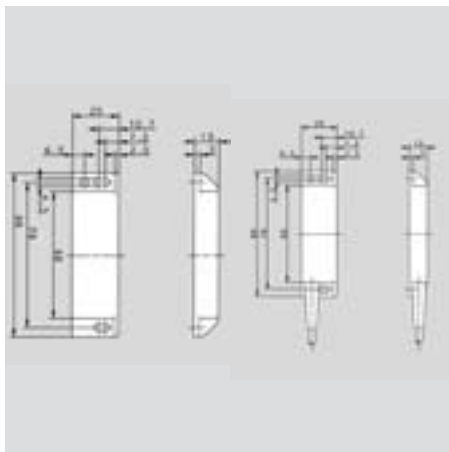

Coded switches



3 m PVC cable		
Designation		
Part number		
Delivery: ex-stock/bult to order		
6 m PVC cable		
Designation		
Part number		
Delivery: ex-stock/bult to order		
9 m PVC cable		
Designation		
Part number		
Delivery: ex-stock/bult to order		
Plug M 12/4 poles		
Designation		
Part number		
Delivery: ex-stock/bult to order		
Switching capacity		
Operating voltage	max.	DC 30 V
Switching capacity	max.	250 mW

Ambient conditions		
Temperatur range	min./max.	-5 °C/+70 °C
Protection class (according to IEC 529, EN 60529)		
Housing material		
Sensing distance		
S on	min.	3 mm
S off	max.	10 mm

Operating magnet		
Designation		
Part number		

To be used MÜZ		
see page		

All dimensions in mm

Other versions available on request.

MAK-5336-3		
649.0653.310		
●/-		
MAK-5336-6		
649.0653.311		
●/-		
MAK-5336-9		
649.0653.312		
●/-		
MAK-5336-STK		
649.0653.313		
●/-		

-5 °C/+70 °C		
+23 °F/+158 °C		
IP 67		
PA 6.6		
3 mm		
10 mm		

TK-43-CD		
640.2043.023		

256-257		
---------	--	--

