


1W AC-DC POWER MODULE BP SERIES (P-S ISOLATED)

FEATURES

- Input Range 100-277VAC 50/60Hz
- Output range from 3.3V-14VDC
Also can be customized
- Switching Power Module For PCB Mount
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 3600VAC
- Integrated perfect Protection
Low standby power and Leakage Current
- Integrated EMC network
- Dielectric Strength: 3600Vac 5mA1min
- Protection: OLP: Output over load protection
OSP: Output short protection
OTP: Over temperature protection
- Compact Size
- UL, TUV Approved

OUTLINE DIMENSIONS

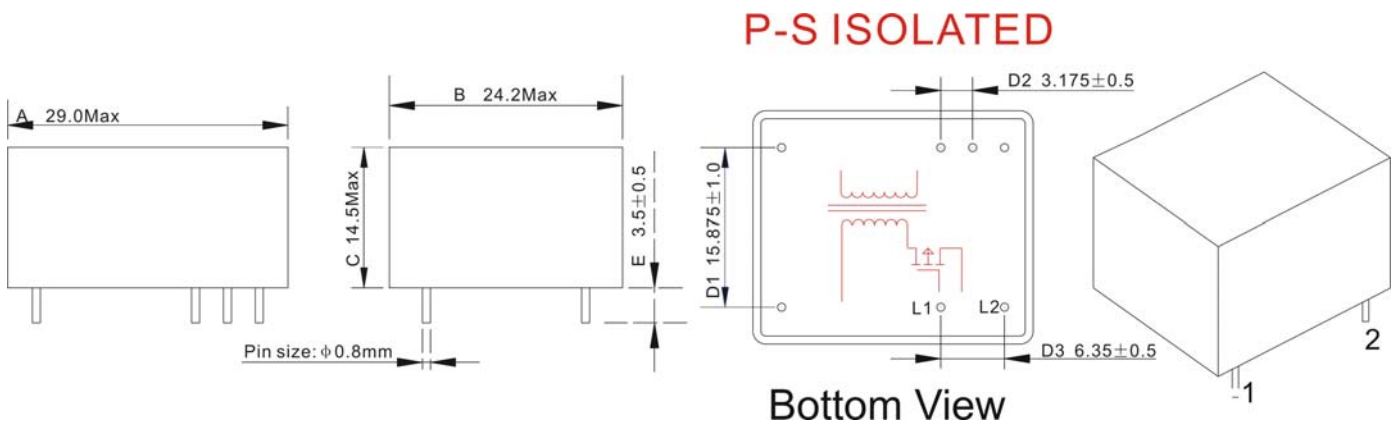

ELECTRONIC SPECIFICATIONS

Order Number	Leakage Current (Ma)	No load Loss (W)	Output(DC)			Ripple & Noise	Ambient TEMP(°C)	Weight	Certificate	
			S1	S2	Accuracy				UL	CE
BP01D1403W	0.2mA	0.3W	14V@48mA	3.3V@23mA	±5%	<1% Vout	60	20g	●	●
BP01D1405W	0.2mA	0.3W	14V@43mA	5V@28mA	±5%	<1% Vout	60	20g	●	●
BP01D0803W	0.2mA	0.3W	8V@72mA	3.3V@53mA	±5%	<1% Vout	60	20g	●	●
BP01D0805W	0.2mA	0.3W	8V@42mA	5V@83mA	±5%	<1% Vout	60	20g	●	●
BP01S1400W	0.2mA	0.3W	14V@71mA		±5%	<1% Vout	60	20g	●	●
BP01S0800W	0.2mA	0.3W	8V@83mA		±5%	<1% Vout	60	20g	●	●