


ZETTLER MAGNETICS CO., LTD.

3W AC-DC POWER MODULE SINGLE OUTPUT SERIES (P-S NON-ISOLATED)

FEATURES

- Input Range 195-240VAC 50/60Hz
- Output range from 12V-24VDC
Also can be customized
- Switching Power Module For PCB Mount
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 3600VAC
- Integrated perfect Protection
Low standby power and Leakage Current
- Integrated EMC network
- Dielectric Strength: 3600Vac 5mA1min
- Protection: OLP: Output over load protection
OSP: Output short protection
OTP: Over temperature protection
- Compact Size
- UL, TUV Approved

OUTLINE DIMENSIONS

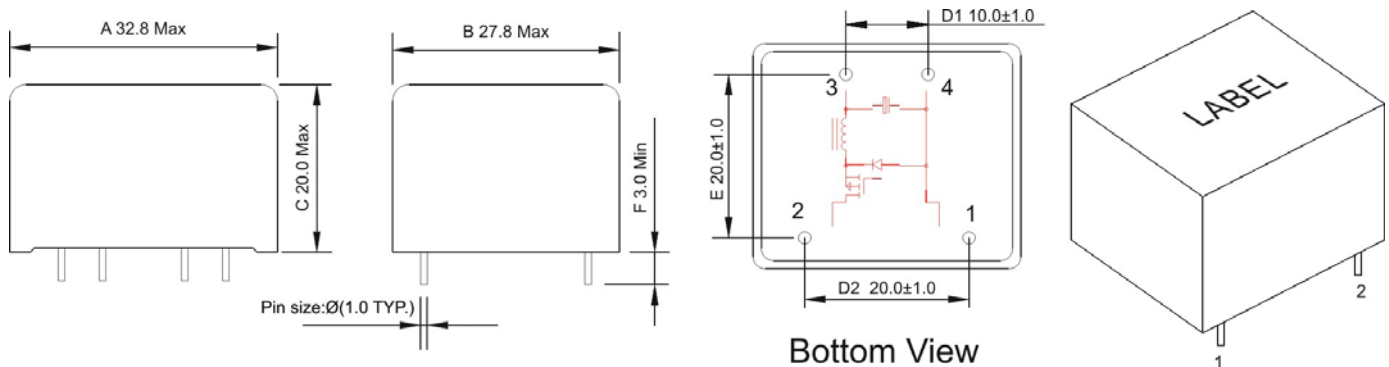

ELECTRONIC SPECIFICATIONS

Order Number	Leakage Current (Ma)	No load Loss (W)	Output Voltage (VDC.)	Output Current (Ma)	Voltage Accuracy	Ripple	Noise	Ambient TEMP(°C)	Phasic	Weight	Certificate		
											TUV	UL	CE
ZP03C1200W-A	0.1mA	0.3W	12V	250	±10%	<300mV	<300mV	70	+	30g		●	
ZP03C1500W-A	0.1mA	0.3W	15V	200	±10%	<300mV	<300mV	70	+	30g		●	
ZP03C1800W-A	0.1mA	0.3W	18V	166	±10%	<300mV	<300mV	70	+	30g		●	
ZP03C2400W-A	0.1mA	0.3W	24V	125	±10%	<300mV	<300mV	70	+	30g		●	
ZP03C1200W-B	0.1mA	0.3W	12V	250	±10%	<300mV	<300mV	70	-	30g		●	
ZP03C1500W-B	0.1mA	0.3W	15V	200	±10%	<300mV	<300mV	70	-	30g		●	
ZP03C1800W-B	0.1mA	0.3W	18V	166	±10%	<300mV	<300mV	70	-	30g		●	
ZP03C2400W-B	0.1mA	0.3W	24V	125	±10%	<300mV	<300mV	70	-	30g		●	