


ZETTLER MAGNETICS CO., LTD.

5W DUAL OUTPUT SERIES AC-DC POWER MODULE (P-S ISOLATED,S-S NON-ISOLATED)

FEATURES

- Input Range 100-240VAC 50/60Hz
- Output range from 5V-24VDC
Also can be customized
- Switching Power Module For PCB Mount
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 3600VAC
- Integrated perfect Protection
Low standby power and Leakage Current
- Integrated EMC network
- Dielectric Strength: 3600Vac 5mA1min
- Protection: OLP: Output over load protection
OSP: Output short protection
OTP: Over temperature protection
- Compact Size

OUTLINE DIMENSIONS

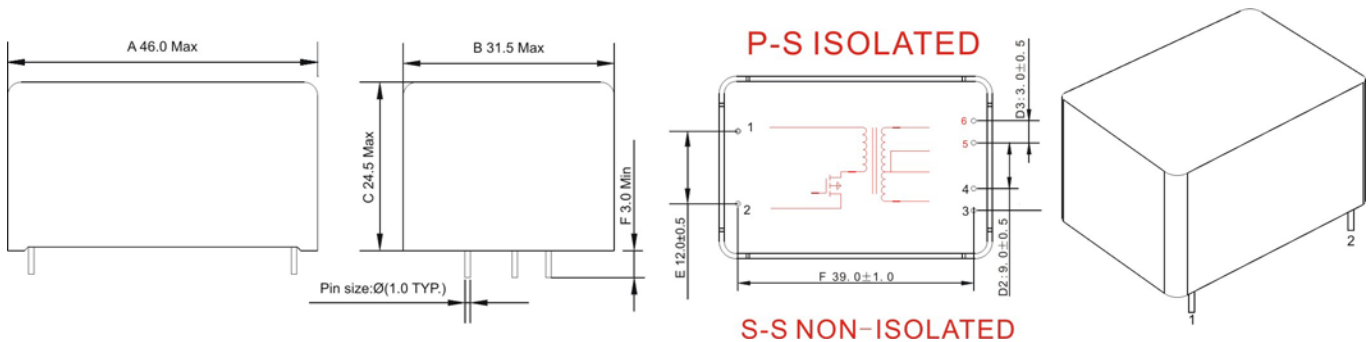

ELECTRONIC SPECIFICATIONS

Order Number	Leakage Current (mA)	No load Loss (W)	Output(DC)				Ripple & Noise	Ambient TEMP (°C)	Weight	Certificate		
			S1	Accuracy	S2	Accuracy				TUV	UL	CE
ZP05D0505W	0.3mA	0.3W	5V@2.5W	±3%	5V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D0606W	0.3mA	0.3W	6V@2.5W	±3%	6V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D0707W	0.3mA	0.3W	7V@2.5W	±3%	7V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D0909W	0.3mA	0.3W	9V@2.5W	±3%	9V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D1010W	0.3mA	0.3W	10V@2.5W	±3%	10V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D1212W	0.3mA	0.3W	12V@2.5W	±3%	12V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D1515W	0.3mA	0.3W	15V@2.5W	±3%	15V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D1818W	0.3mA	0.3W	18V@2.5W	±3%	18V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D2424W	0.3mA	0.3W	24V@2.5W	±3%	24V@2.5W	±10%	<1% Vout	65	50g	●		●
ZP05D0312W	0.3mA	0.3W	3.3V@1.5W	±3%	12V@3.5W	±10%	<1% Vout	65	50g	●		●
ZP05D0512W	0.3mA	0.3W	5V@1.5W	±3%	12V@3.5W	±10%	<1% Vout	65	50g	●		●
ZP05D0712W	0.3mA	0.3W	7V@1.5W	±3%	12V@3.5W	±10%	<1% Vout	65	50g	●		●