


ZETTLER MAGNETICS CO., LTD.

5W AC-DC POWER MODULE HIGH PRECISION SINGLE OUTPUT SERIES (P-S ISOLATED)

FEATURES

- Input Range 100-240VAC 50/60Hz
- Output range from 5V-24VDC
Also can be customized
- Switching Power Module For PCB Mount
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 3600VAC
- Integrated perfect Protection
Low standby power and Leakage Current
- Integrated EMC network
- Dielectric Strength: 3600Vac 5mA1min
- Protection: OLP: Output over load protection
OSP: Output short protection
OTP: Over temperature protection
- Compact Size
- UL, TUV Approved

OUTLINE DIMENSIONS

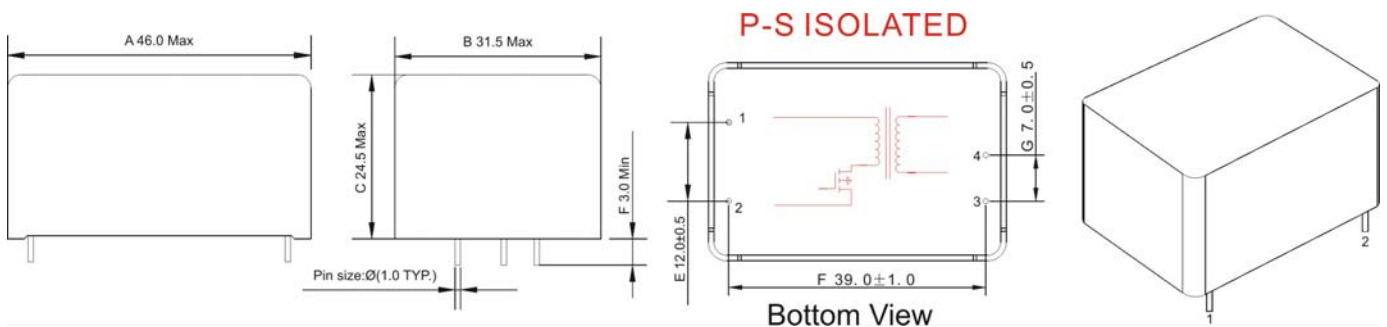

ELECTRONIC SPECIFICATIONS

Order Number	Leakage Current (Ma)	No load Loss (W)	Output Voltage (VDC.)	Output Current (Ma)	Voltage Accuracy	Ripple	Noise	Ambient TEMP(°C)	Weight	Certificate		
										TUV	UL	CE
ZP05S0500W	0.3mA	0.3W	5V	1000	±3%	<50mV	<1% Vout	70	50g	●	●	●
ZP05S0600W	0.3mA	0.3W	5V	833	±3%	<50mV	<1% Vout	70	50g	●	●	●
ZP05S0700W	0.3mA	0.3W	5V	714	±3%	<50mV	<1% Vout	70	50g	●	●	●
ZP05S0900W	0.3mA	0.3W	9V	555	±3%	<50mV	<1% Vout	70	50g	●	●	●
ZP05S1000W	0.3mA	0.3W	10V	500	±3%	<50mV	<1% Vout	70	50g	●	●	●
ZP05S1200W	0.3mA	0.3W	12V	417	±3%	<50mV	<1% Vout	70	50g	●	●	●
ZP05S1500W	0.3mA	0.3W	15V	333	±3%	<50mV	<1% Vout	70	50g	●	●	●
ZP05S1800W	0.3mA	0.3W	18V	277	±3%	<50mV	<1% Vout	70	50g	●	●	●
ZP05S2400W	0.3mA	0.3W	24V	208	±3%	<50mV	<1% Vout	70	50g	●	●	●