


ZETTLER MAGNETICS CO., LTD.

10W SINGLE OUTPUT MINI SERIES AC-DC POWER MODULE (P-S ISOLATED)

FEATURES

- Input Range 100-240VAC 50/60Hz
- Output range from 3V-24VDC
Also can be customized
- Switching Power Module For PCB Mount
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 3600VAC
- Integrated perfect Protection
Low standby power and Leakage Current
- Integrated EMC network
- Dielectric Strength: 3600Vac 5mA 1min
- Protection: OLP: Output over load protection
OSP: Output short protection
OTP: Over temperature protection
- Compact Size

OUTLINE DIMENSIONS

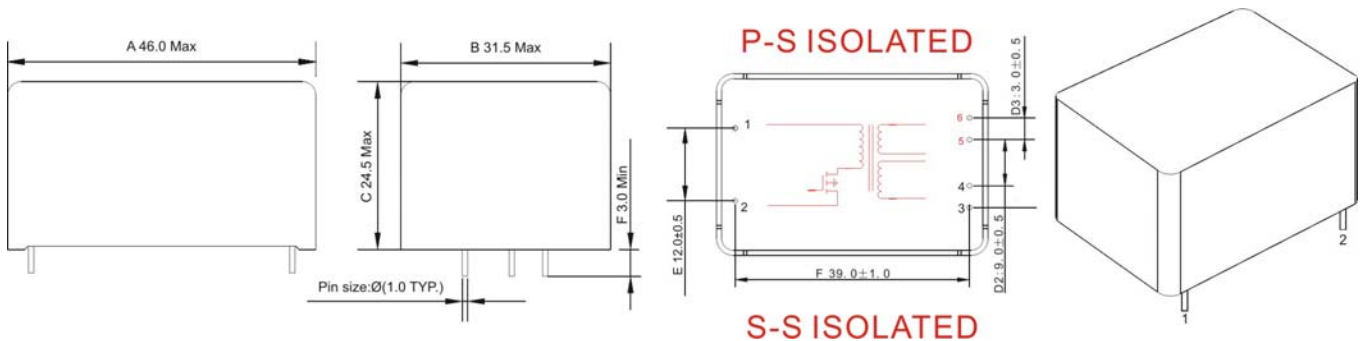

ELECTRONIC SPECIFICATIONS

Order Number	Leakage Current (Ma)	No load Loss (W)	Output Voltage (VDC.)	Output Current (A)	Voltage Accuracy	Ripple	Noise	Ambient TEMP (°C)	Weight	Certificate		
										TUV	UL	CE
ZP10S0300WB	0.3mA	0.15W	3.3	3	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S0500WB	0.3mA	0.15W	5	2	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S0600WB	0.3mA	0.15W	6	1.66	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S0700WB	0.3mA	0.15W	7.5	1.33	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S0900WB	0.3mA	0.15W	9	1.11	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S1200WB	0.3mA	0.15W	12	0.833	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S1500WB	0.3mA	0.15W	15	0.666	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S1800WB	0.3mA	0.15W	18	0.555	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S2400WB	0.3mA	0.15W	24	0.416	±5%	<5% Vout	<5% Vout	50	50g			
ZP10S4800WB	0.3mA	0.15W	48	0.208	±5%	<5% Vout	<5% Vout	50	50g			