

4

3

2

DWG NO.
GE-2156

SH
1


REV
C

1


PROPRIETARY NOTICE: THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO AMPHENOL AND SHALL NOT BE DISCLOSED IN WHOLE OR IN PART IN ANY FORM OR FOR ANY REASON EXCEPT AS EXPRESSLY STATED IN WRITING BY AMPHENOL.

NOTES:

1. CONTINUOUS OPERATING TEMPERATURE -40°C TO 150°C
2. CONNECTOR: METRI-PACK 150.2 OR GT150 3.5mm  MATING APTIV(DEPLHI) NUMBER: 12162193,15336004, OR EQUIVILANT
- 3 VOLTAGE: 5V
4. NEEDS A SEALING GASKET, A COPPER CRUSH WASHER OR POSSIBLY AN O-RING.
5. RECOMENDED INSTALLATION TORQUE OF 25 NM, REFERENCE.

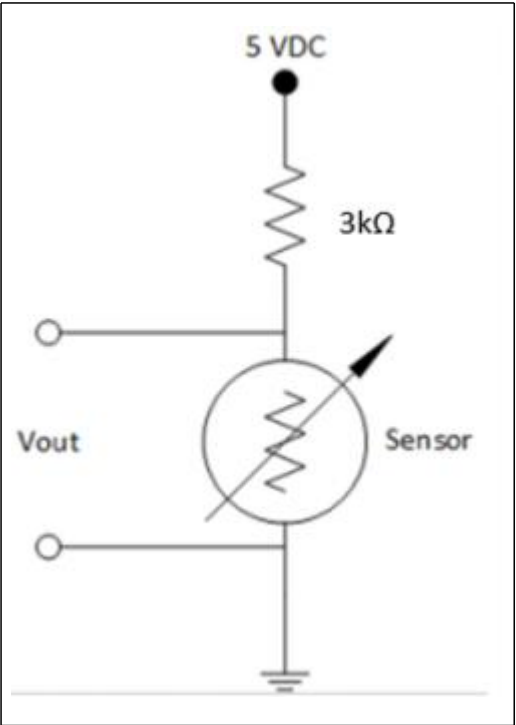


TYPICAL, 25°C CIRCUIT

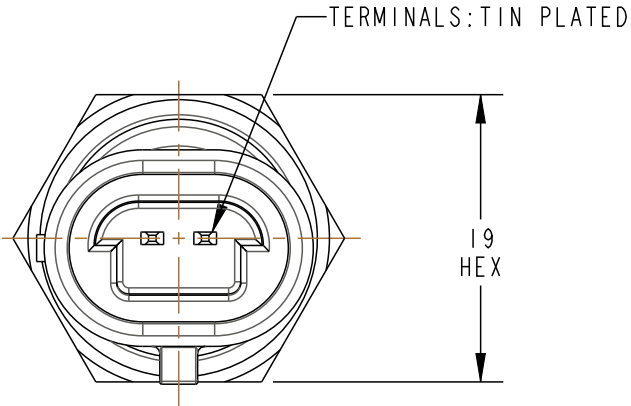

TERMINALS:TIN PLATED



19
HEX

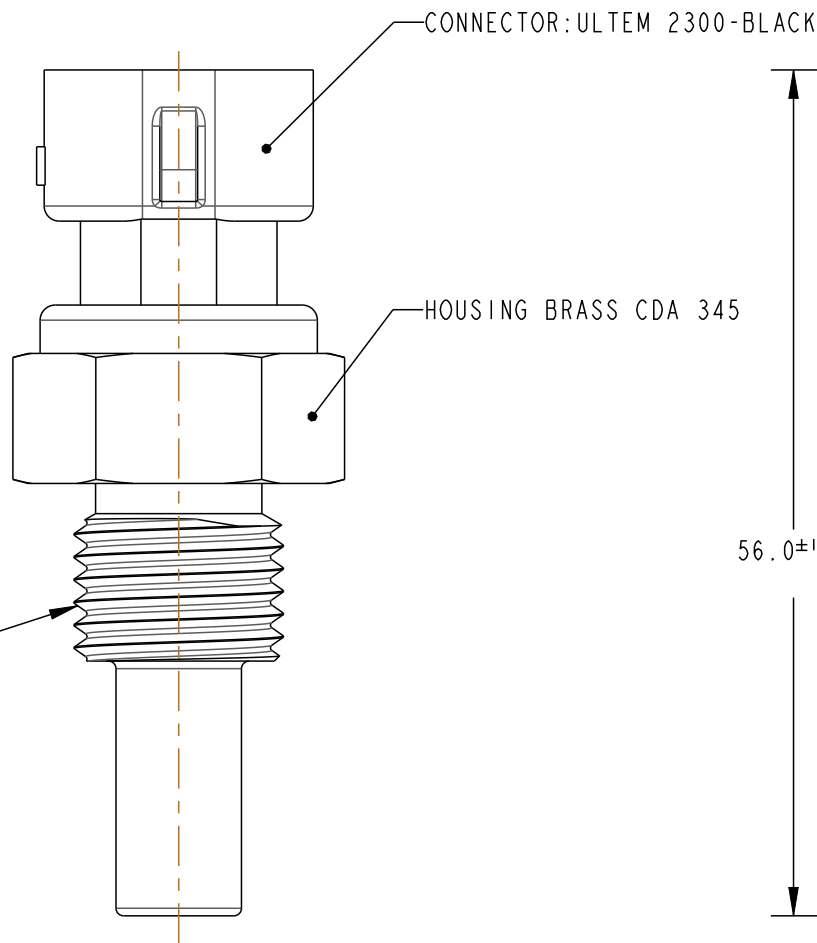

CONNECTOR:ULTEM 2300-BLACK

HOUSING BRASS CDA 345

M14 x 1.5

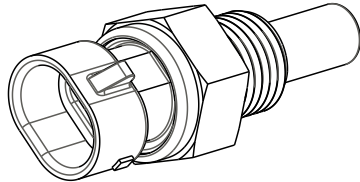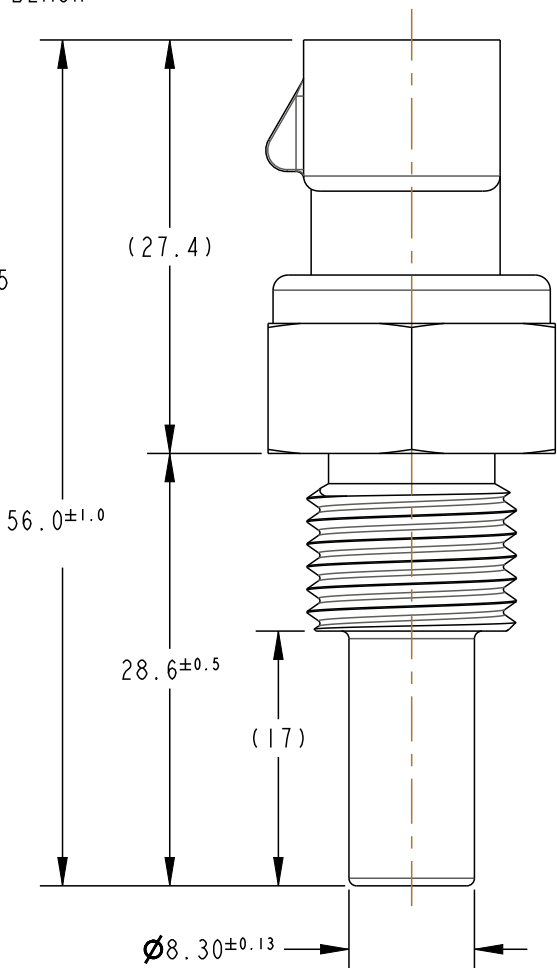

SCALE 1:1

Amphenol

Advanced Sensors

St. Marys, PA 15857

TITLE			
FLUID TEMPERATURE SENSOR			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE: .X ± 0.5 .XX ± 0.25		APPROVALS	
		DRAWN	DAM/MED
THIRD ANGLE PROJECTION		CHECKED	STS
		ENGR	JJD
INTERPRET DRAWING IAW ASME Y14.5		QC	
		MFG	
MATERIAL SEE DRAWING			
SIZE	DWG NO.	REV	
B		C	
SCALE		SHEET 1 OF 1	
1:1			

LEGAL NOTICE - THIS DRAWING AND ANY INTELLECTUAL PROPERTY RIGHTS THERE IN ARE PROPERTY OF AMPHENOL AND NO LICENSES ARE GRANTED UNDER THOSE RIGHTS

4

3

2

1