

High frequency integral cable accelerometer

712F-M4



SPECIFICATIONS



Sensitivity, $\pm 10\%$, 25°C		100 mV/g
Acceleration range		60 g peak
Amplitude nonlinearity		1%
Frequency response:	$\pm 5\%$	9.0 - 15,000 Hz
	$\pm 10\%$	6.0 - 20,000 Hz
	± 3 dB	3.0 - 25,000 Hz
Resonance frequency, mounted		>45 kHz
Transverse sensitivity, max		3% of axial
Temperature response:	-50°C	-10%
	+120°C	+10%
Power requirement:		
Voltage source		18 - 30 VDC
Current regulating diode		2 - 10 mA
Electrical noise, equiv. g, nominal:		
Broadband	2.5 Hz to 25 kHz	1,000 μ g
	10 Hz	25 μ g/ $\sqrt{\text{Hz}}$
	100 Hz	10 μ g/ $\sqrt{\text{Hz}}$
	1,000 Hz	8 μ g/ $\sqrt{\text{Hz}}$
Output impedance, max		100 Ω
Bias output voltage, nominal		12 VDC
Grounding		case isolated, internally shielded
Temperature range		-50° to +120°C
Vibration limit		$\pm 1,000$ g
Shock limit, max		5,000 g peak
Sealing		hermetic
Base strain sensitivity, max		0.03 g/ μ strain
Sensing element design		PZT ceramic / shear
Weight		35 grams
Case material		316L stainless steel
Mounting		M4 captive screw with 0.047" diameter safety wire hole
Integral cabling		J9T2AK, 16 ft., blunt cut

Accessories supplied: M4 captive screw; calibration data (level 2)



Key features

- Compact size, lightweight
- High frequency detection (25 kHz)
- 8-32 mounting option available
- Manufactured in ISO 9001 facility

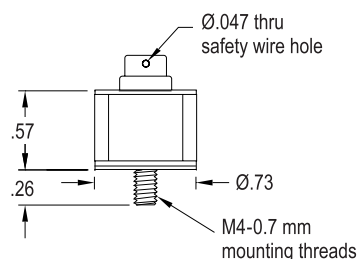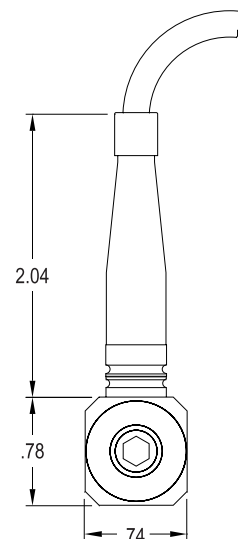

Connections	
Function	Cable conductor color
power/signal	white
common	black
case	shield



Note: Due to continuous process improvement, specifications are subject to change without notice.
This document is cleared for public release.

Wilcoxon Sensing Technologies
An Amphenol Company

8435 Progress Drive
Frederick, MD 21701
USA

Tel: +1 (301) 330-8811
Fax: +1 (301) 330-8873
info@wilcoxon.com

buy.wilcoxon.com
www.wilcoxon.com