

Class I Div 2 certified dual output sensor

786T-D2

SPECIFICATIONS

Sensitivity, $\pm 5\%$, 25°C		100 mV/g
Acceleration range, VDC > 25 V		80 g peak
Amplitude nonlinearity		1%
Frequency response:	$\pm 5\%$	3 - 5,000 Hz
	$\pm 10\%$	1 - 7,000 Hz
	± 3 dB	0.5 - 12,000 Hz
Resonance frequency		30 kHz
Transverse sensitivity, max		5% of axial
Temperature response:	-25°C	-10%
	+120°C	+10%
Temperature sensor:		
Output sensitivity		10 mV/°C
Measurement range		2° to 120°C
Power requirement:	Voltage source	18 - 30 VDC
	Current regulating diode	2 - 10 mA
Electrical noise, equiv. g:		
Broadband	2.5 Hz to 25 kHz	700 μ g
	10 Hz	10 μ g/ $\sqrt{\text{Hz}}$
	100 Hz	5 μ g/ $\sqrt{\text{Hz}}$
	1,000 Hz	5 μ g/ $\sqrt{\text{Hz}}$
Output impedance, max		100 Ω
Bias output voltage, nominal		12 VDC
Grounding		case isolated, internally shielded
Temperature range		-50° to +120°C
Vibration limit		500 g peak
Shock limit		5,000 g peak
Electromagnetic sensitivity, equiv. g, max		70 μ g/gauss
Sealing		hermetic
Base strain sensitivity, max		0.0002 g/ μ strain
Sensing element design		PZT, shear
Weight		90 grams
Case material		316L stainless steel
Mounting		1/4-28 UNF tapped hole
Output connector		3 pin, MIL-C-5015 style
Mating connector		R6G
Recommended cabling		J9T3A

Accessories supplied: SF6 mounting stud; calibration data (level 2)

Certifications


 C _{US}	Class I, Div 2 Groups A, B, C, D		II 3 G	
	Class I, Zone 2 AEx/Ex nA II T4 Tamb: -50°C to 120°C		Ex nA IIC T4 Gc	
Must be installed per 13029. • Ambient temperature range depends on the type cable used during installation. • Cable with FEP jacket, Ta=-50°C to +120°C. • Cable with Santoprene jacket, Ta=-45°C to +115°C.				

Note: Due to continuous process improvement, specifications are subject to change without notice. This document is cleared for public release.



Key features

- Accelerometer with internal temperature sensor
- Certified for use in Class I Div 2 hazardous areas
- Manufactured in ISO 9001 facility

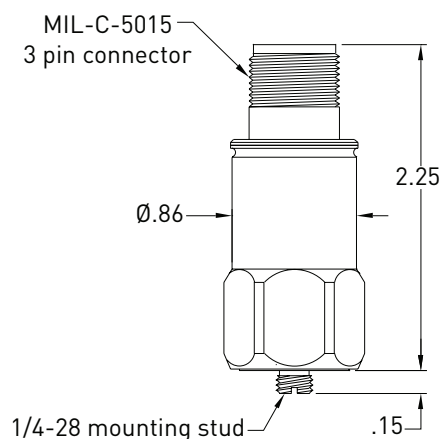

Connections	
Function	Connector pin
accelerometer power / signal	A
accelerometer and temp sensor common	B
temp sensor signal	C
ground / case	shell