

THERMOMETRICS
A COMMITMENT TO EXCELLENCE

Product Spotlight



“AB” Thermistors for Healthcare

Features

- Chip in Glass Technology with proven reliability
- 14004 ohms @ 37°C
- 25/50 Beta: 3500 nominal
- Very Fast Response Time
- Small Profile for Tight Spaces
- Excellent Point Isolation of Measurement

Applications



- Continuous Cardiac Output Monitoring
- Thermal dilution catheters
- Foley catheters
- Esophageal catheters
- Internal Body Temperature monitoring
- Other Disposable Temperature Monitoring



Resistance vs. Temperature

Temp (°C)	Res (ohms)	Temp (°C)	Res (ohms)	Temp (°C)	Res (ohms)
0	62775.7	17	30268.7	34	15634.0
1	60014.5	18	29062.1	35	15067.50
2	57390.3	19	27910.2	36	14524.5
3	54895.4	20	26810.2	37	14004.0
4	52522.9	21	25759.6	38	13504.9
5	50266.1	22	24755.8	39	13026.2
6	48118.9	23	23796.6	40	12567.0
7	46075.4	24	22879.8	41	12126.3
8	44129.9	25	22003.2	42	11703.5
9	42277.4	26	21165.0	43	11297.6
10	40512.9	27	20363.1	44	10907.9
11	38831.8	28	19596.0	45	10533.7
12	37229.7	29	18861.9	46	10174.2
13	35702.5	30	18159.2	47	9828.9
14	34246.4	31	17486.5	48	9497.1
15	32857.6	32	16842.2	49	9178.2
16	31532.8	33	16225.2	50	8871.7

SKU	Description	Tol. @ 37°C	Figure	“OD”	“LEN”	Lead Type
500812	AB6B2-GC16KA143E/37C	±0.5%	1	0.022”	0.090”±0.010”	#38AWG Ni
500804	AB6B2-GC14KA143L/37C	±15%	1	0.022”	0.090”±0.010”	#38AWG Ni
507894	AA6B4-GC11KA143L/37C	±15%	2	0.014”	0.090”±0.010”	#40AWG Ni
508451	A96N4-GC11KA143L/37C	±15%	2	0.0125”	0.055”±0.005”	#44AWG Cu
500891	AB6N2-GC14KA143E/37C	±0.5%	1	0.019” max	0.060” ± 0.005”	#38AWG Ni
508453	AN6N4-GC11KA143L/37C	±15%	2	0.0125” max	0.055” ± 0.005”	#44AWG Ni

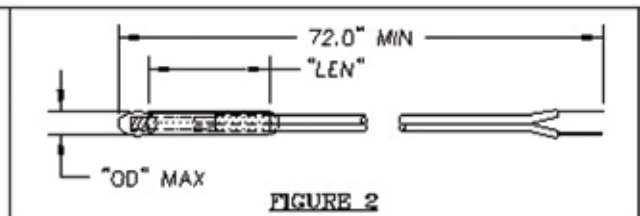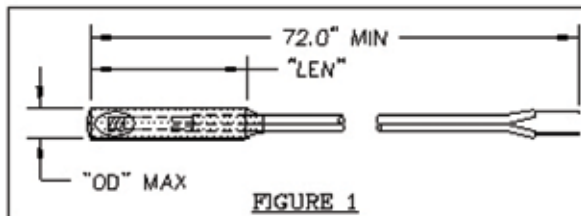

Amphenol
Advanced Sensors

www.amphenol-sensors.com

© 2015 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.