


T H E R M O M E T R I C S
A COMMITMENT TO EXCELLENCE

NTC Type NKI

Resin-Coated Noise Immune Thermistors

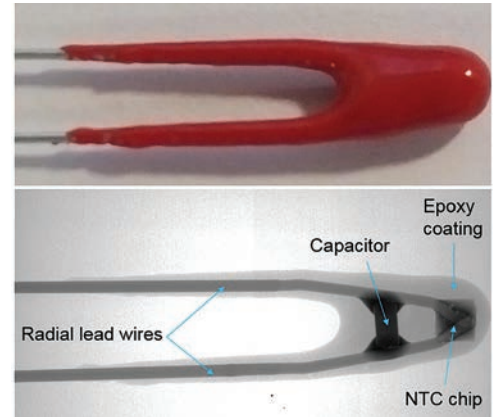

With increasing complexity of electric systems and density of electronic components in modern vehicles, conventional NTC thermistor sensors are vulnerable to stray electromagnetic interference causing self-heating. This effect potentially generates false over-temperature readings from the sensor or can cause damage to equipment.

Thermometrics has developed a noise immune NTC thermistor with an integrated radio frequency (RF) decoupling function, providing protection from electromagnetic interference (EMI) at the component level over a wide frequency range.


Applications

- EV/HEV/PHEV Markets
- Battery Temperature Sensing
- Existing Automotive - Upgrade
- Drive Systems
- HVAC
- Air Intake / Coolant
- Power Electronics

Features

- NTC element-level EMI protection
- Fast time response
- Drop-in upgrade for existing applications
- Reduced system cost:
 - Retrofit to use existing housing designs
 - Eliminate shielded cables
- EMC-tested to GMW3097 / ISO11452
- Range of conformal coatings available

Dimensions in mm

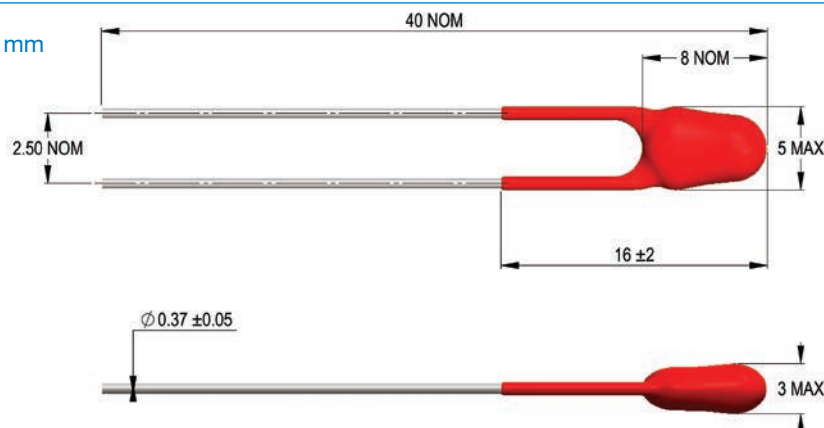

Amphenol

Advanced Sensors

Noise Immune Thermistor (NKI) Specifications

NKI Resistance Values

R25 Ω	Material System	B Value 25/85°C K	Code R25°C ± 1%	Code R25°C ± 2%	Code R25°C ± 3%	Code R25°C ± 5%	Code R25°C ± 10%
500	2	3540 ± 1%	NKI#501C2*1^	NKI#501C2*2^	NKI#501C2*3^	NKI#501C2*5^	NKI#501C2*10^
500	2A	3627 ± 1%	NKI#501C2A*1^	NKI#501C2A*2^	NKI#501C2A*3^	NKI#501C2A*5^	NKI#501C2A*10^
500	7	3977 ± 1%	NKI#501C7*1^	NKI#501C7*2^	NKI#501C7*3^	NKI#501C7*5^	NKI#501C7*10^
1000	2	3540 ± 1%	NKI#102C2*1^	NKI#102C2*2^	NKI#102C2*3^	NKI#102C2*5^	NKI#102C2*10^
1000	2A	3627 ± 1%	NKI#102C2A*1^	NKI#102C2A*2^	NKI#102C2A*3^	NKI#102C2A*5^	NKI#102C2A*10^
1000	7	3977 ± 1%	NKI#102C7*1^	NKI#102C7*2^	NKI#102C7*3^	NKI#102C7*5^	NKI#102C7*10^
2000	2	3540 ± 1%	NKI#202C2*1^	NKI#202C2*2^	NKI#202C2*3^	NKI#202C2*5^	NKI#202C2*10^
2000	2A	3627 ± 1%	NKI#202C2A*1^	NKI#202C2A*2^	NKI#202C2A*3^	NKI#202C2A*5^	NKI#202C2A*10^
2000	7	3977 ± 1%	NKI#202C7*1^	NKI#202C7*2^	NKI#202C7*3^	NKI#202C7*5^	NKI#202C7*10^
2700	1	3977 ± 0.75%	NKI#272C1*1^	NKI#272C1*2^	NKI#272C1*3^	NKI#272C1*5^	NKI#272C1*10^
5000	4A	3436 ± 1%	NKI#502C4A*1^	NKI#502C4A*2^	NKI#502C4A*3^	NKI#502C4A*5^	NKI#502C4A*10^
5000	1	3977 ± 0.75%	NKI#502C1*1^	NKI#502C1*2^	NKI#502C1*3^	NKI#502C1*5^	NKI#502C1*10^
10000	4A	3436 ± 1%	NKI#103C4A*1^	NKI#103C4A*2^	NKI#103C4A*3^	NKI#103C4A*5^	NKI#103C4A*10^
10000	5	3740 ± 1%	NKI#103C5*1^	NKI#103C5*2^	NKI#103C5*3^	NKI#103C5*5^	NKI#103C5*10^
10000	1	3977 ± 0.75%	NKI#103C1*1^	NKI#103C1*2^	NKI#103C1*3^	NKI#103C1*5^	NKI#103C1*10^
12000	5	3740 ± 1%	NKI#123C5*1^	NKI#123C5*2^	NKI#123C5*3^	NKI#123C5*5^	NKI#123C5*10^
30000	8	3977 ± 1%	NKI#303C8*1^	NKI#303C8*2^	NKI#303C8*3^	NKI#303C8*5^	NKI#303C8*10^
50000	8	3977 ± 1%	NKI#503C8*1^	NKI#503C8*2^	NKI#503C8*3^	NKI#503C8*5^	NKI#503C8*10^

Other values available upon request.

Operating Temperature: Epoxy 155°C, CR1 190°C

For resistance-temperature data, according to appropriate material system, please refer to [Reference Guide AAS-913-318](#) - [temperature data](#).

Ordering Information

Replace # in the table codes above as follows:

10nF capacitor 10NF

100nF capacitor 100NF

Replace * in the table codes shown above as follows:

Loose-packed R

Bandoliered B

Replace ^ in the table codes shown above as follows:

Epoxy coating E

CR1 harsh environment coating C

Example Coding:

NKI100NF502C1R5E: 100nF capacitor, 5k resistance, Material System 1, Loose-packed, 5% tolerance, Epoxy coating.

Amphenol
Advanced Sensors

www.amphenol-sensors.com

© 2022 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice.
Other company names and product names used in this document are the registered trademarks or
trademarks of their respective owners.

AAS-920-729C - 03/2022