

OTe 35/220...240/1A0 CS S

OPTOTRONIC ECO | Compact Constant Current – Non dimmable



Areas of application

- Suitable for use in luminaires with flexible current setting (Tri-Tap)
- Suitable for indoor SELV equivalent installations
- Suitable for luminaires of protection classes I and II
- Suitable for downlights, spotlights, LED panels, etc.
- Installation via Cable Clamp Kit possible (depending on version of product)
- Independent mounting via Cable Clamp Kit possible (depending on version of product)

Product benefits

- Versatile scope of application due to output power range of up to 54 W
- Efficient and reliable

Product features

- Supply voltage: 220...240 V
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198...264 V
- Safety according to EN 61347-1, 61347-2-13, 62384
- RI suppression according to EN 55015:2007+A1:2007/CDN
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547
- Lifetime: up to 50,000 h
- Independent connection via through-looping (depending on version of product)

Technical data

Electrical data

Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Input voltage AC	195...264 V ¹⁾
Total harmonic distortion	< 20 %
Power factor λ	0.95 ²⁾
ECG efficiency	87 % ³⁾
Device power loss	5.5 W ⁴⁾
Inrush current	16 A ⁵⁾
Max. ECG no. on circuit breaker 10 A (B)	28
Max. ECG no. on circuit breaker 16 A (B)	44
Max. ECG no. on circuit breaker 25 A (B)	-
Surge capability (L/N-Ground)	1 kV
Surge capability (L-N)	1 kV
Nominal output voltage	17...34 V ⁶⁾
U-OUT (working voltage)	50 V
Nominal output current	800 / 925 / 1050 mA ⁷⁾
Output current tolerance	±5 %
Nominal output power	36 W ⁸⁾
Galvanic isolation	SELV equivalent
Galvanic isolation primary/secondary	3.75 kV ⁹⁾

¹⁾ Permitted voltage range

²⁾ Full load at 230 V/50 Hz

³⁾ At full load and 230 V

⁴⁾ At 230 V

⁵⁾ $t_{\text{width}} = 100 \mu\text{s}$ (measured at 50 % I_{peak})


⁶⁾ Maximum 50 V

⁷⁾ ±5%

⁸⁾ Partial load 14...36 W

⁹⁾ SELV-equivalent

Dimensions & weight

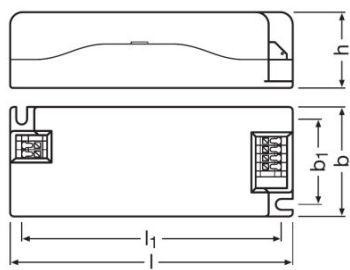

Length	110.0 mm
Width	43.0 mm
Height	29.5 mm
Mounting hole spacing, length	101.0 mm
Mounting hole spacing, width	34.0 mm
Product weight	135.00 g
Cable cross-section, input side	0.5...1.5 mm ²
Cable cross-section, output side	0.5...1.5 mm ²
Wire preparation length, input side	8.0...9.0 mm
Wire preparation length, output side	8.0...9.0 mm

Colors & materials

Casing material	Plastic
-----------------	---------

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Maximum temperature at tc test point	80 °C ¹⁾
Max.housing temperature in case of fault	110 °C
Permitted rel. humidity during operation	5...85 %

¹⁾ Maximum at the Tc-point

Lifespan

ECG lifetime	50000 / 35000 h ¹⁾
--------------	-------------------------------

¹⁾ T_c = 75°C, with max. 10% failure rate / T_c = 80°C, with max. 10% failure rate

Product datasheet

Expected Lifetime

Product name				
OTe 35/220...240/1A0 CS S	ECG ambient temperature [ta]	-	-	-
	Temperature at tc-point [°C]	75	80	-
	Lifetime [h]	50000	35000	-

Additional product data

Encapsulated	No
--------------	----

Capabilities

Dimmable	No
Overheating protection	Automatic reversible
Overload protection	Automatic reversible
Short-circuit protection	Automatic reversible
No-load proof	Yes
Max. cable length to lamp/LED module	2.0 m
Suitable for fixtures with prot. class	I / II
Type of connection, output side	Push terminal

Certificates & standards

Approval marks – approval	ENEC 10 / VDE / CE
Standards	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61547/Acc. to IEC 61000-3-3
Type of protection	IP20

Logistical data

Temperature range at storage	-25...75 °C
------------------------------	-------------

Download Data

File	
	Brochures OPTOTRONIC Compact LED drivers (GB)
	Certificates ENEC OTe CS CS S
	Certificates VDE-EMC-Certificate OT_OTe_OTp_OT Fit_OTi

Product datasheet



Declarations of conformity
EC DoC OTe CS



CAD data 3-dim
OTe 35 CS S-housing-3D drawing

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899917651	OTe 35/220...240/1A0 CS S	Shipping carton box 20	239 mm x 232 mm x 93 mm	5.16 dm ³	2974.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.