

FEATURES


- CEC IV Efficiency Regulations Compliance
- Cisprr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 280g only
- Efficiency 85%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0~35κ
- Over-Current Protective Optional

**SPECIFICATION**


Model Item	A3-50S12R	A3-50S17R	A3-60S12R	A3-60S17R
Output Voltage	12~17V	17~24V	12~17V	17~24V
Output Rating	50W Max		60W Max	
Input Voltage	AC 90~264V			
Input Frequency	47~63Hz			
Input Current	1.5A Maximum			
Inrush Current	100A Maximum			
Line Regulation	2% Maximum			
Load Regulation	±5%			
Ripple & Noise	1.5% Typical			
Efficiency	85% Typical			
Temperature Coefficient	0.05%/K			
Over-Voltage Protection	Auto Recovery			
Short-circuit Protection	Auto Recovery			
Operating Temperature	0~35K			
Storage Temperature	-20~85K			
Safety	UL, CUL, TUV, CB, BSMI, CEC			
EMC (EMI/EMS)	CE			

(): Under Development (): In Process (): Pending Above specification is for reference only, please contact for details.

ORDERING INFORMATION

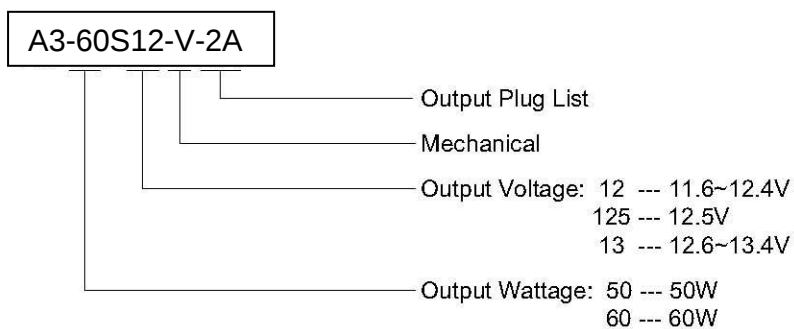

MECHANICAL

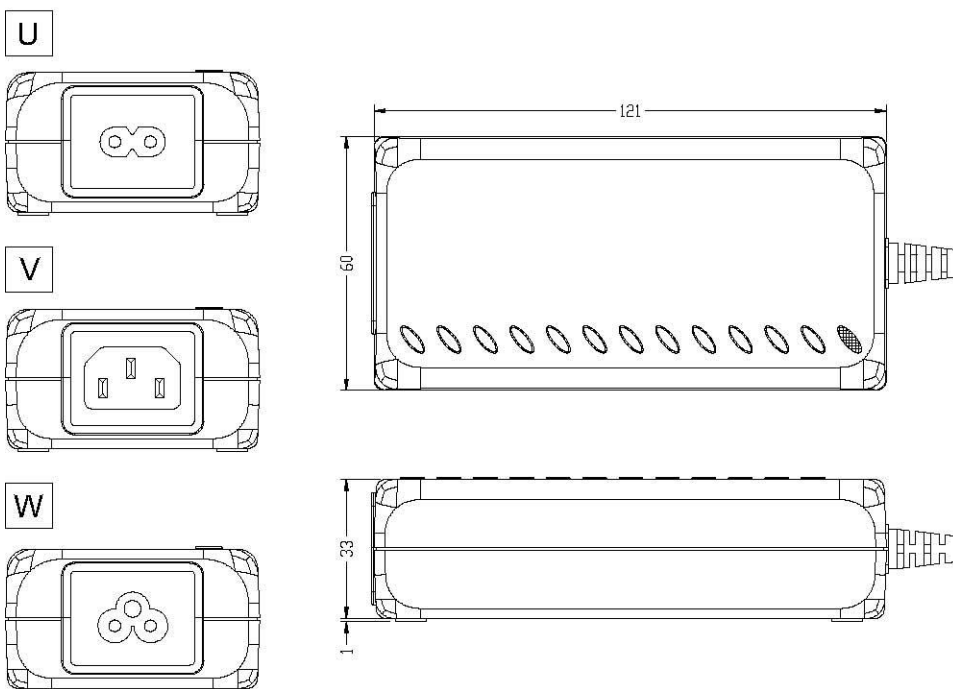

Unit: m.m.

Standard Output Cable: 12~17V: 16AWG, UL#1571, 1200mm, EMI Core 18~24V: 18AWG, UL#SPT-1, 1200mm, EMI Core