



Model: BEMG36 Series

Total Power	36 Watts
Input Voltages	90-264 VAC
Outputs	Single

SPECIAL FEATURES

- Universal Input
- High Efficiency
- Green Power Design
- RoHS compliant
- EMI meets EN55011 FCC Class B
- Medical Approved EN60601-1/UL2601-1,
- CE compliant

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature: 0 to +40°C with no derating

Power Density: 2.87 Watts/Cubic inch

Storage Temperature: -20° to +85°C

Temperature coefficient: $\pm 0.04\%$ / °C

Cooling: Free air convection

SAFETY APPROVALS,

EN60601-1/UL2601-1

ELECTRICAL SPECIFICATIONS

Input Specifications

Input Range.....	90-264 VAC
Frequency.....	47-63 Hz
EMI filter.....	EN55011 FCC Class B
Input Connector.....	IEC320-3P AC Receptacle
Inrush Current.....	35A @ 230 VAC
Input Current.....	0.85A @ 90Vac
	0.30A @ 264Vac
Dielectric Withstand.....	Meet IEC950
Hold-up Time.....	15mS @ 115Vac
	60mS @ 230Vac
Efficiency.....	80%
Green Power.....	0.37W @ 132Vac
	0.50W @ 264Vac
Switching Frequency.....	60 KHz.
Leakage.....	<0.126mA

Output Specifications

DC Output..... Maximum continuous output power 36 Watts.

Line Regulation..... 0.2%

Load Regulation..... $\pm 3.0\%$

Ripple and Noise..... 1.0% Pk to Pk

Autec Power Systems, Inc.

Tel: 805-522-0888 Fax: 805-522-8777

e-mail: autecsales@autec.com

Web site www.Autec.com

Model: BEMG36 Series

ELECTRICAL SPECIFICATIONS (CONT')

Output Specifications

Transient Response..... Output voltage returns in less than 1mS following a 25% load change.

OVP.....Built-in, Zener diode clamping

Overload Protection (OLP).....125% to 150%

Short-circuit Protection

NOTES

- Specifications subject to change without notice.
- All dimensions in inches/mm
- Warranty: 1 year
- Weight: 11.6Oz. (330g)

Model: BEMG36 Series


MODEL No. / OUTPUT VOLTAGE / CURRENT RATINGS CHART (Sample Chart not all Models shown)

Model No.	O/P Voltage (Vdc)	Current
BEMG36-120-72	12.0V	3.0A
BEMG36-200-72	20.0V	1.8A
BEMG36-240-72	24.0V	1.5A
BEMG36-360-72	36.0V	1.0A
BEMG36-480-72	48.0V	0.8A

All voltages available between 12V and 48V in increments of .1V

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 330.0g (11.6 Oz.)

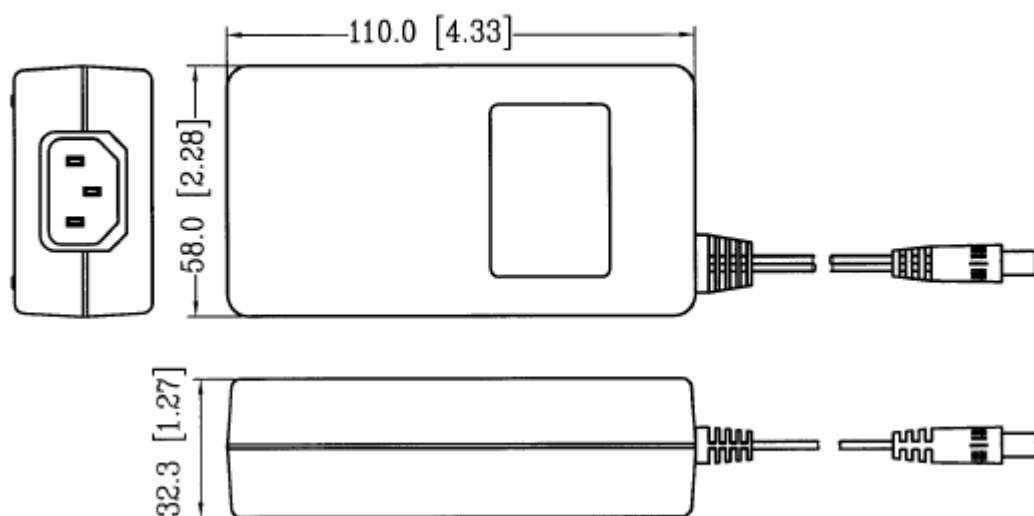

Autec Power Systems, Inc.

e-mail: autecsales@autec.com

Tel: 805-522-0888 Fax: 805-522-8777

Web site www.Autec.com

BEMG36 Series Spec – 102406